

Type 3199 Aluminum Electrolytic, Screw Terminals

Screw Terminal Capacitors for Power Output Filtering



With twice the capacitance of Type 3191 capacitor, Type 3199 extends output filtering performance into higher power, especially with cold temperature requirements. Standard encasement is with the capacitor element compressed onto an aluminum peg in the can bottom and a phenolic peg in the top. Optional Rilled construction is available. With rilled construction the element is secured by rills, spoon shaped dimples in the side of the can. Rilled construction offers the industries highest vibration and shock withstanding capability and excellent heat transfer.

Highlights

- Stud mount available
- High current application
- Industrial applications
- Smoothing and filtering
- Audio power supplies

Specifications

Temperature Range	-55 °C to +85 °C																						
Rated Voltage Range	7.5 Vdc to 75 Vdc																						
Capacitance Range	3900 µF to 1.2 F																						
Capacitance Tolerance	-10% +30% -10% +50%																						
Leakage Current	$\leq 6\sqrt{CV}$ µA (6 mA max.) at 5 minutes																						
Ripple Current Multipliers	<p>Ambient Temperature</p> <table border="1"> <tr> <td>45 °C</td> <td>55 °C</td> <td>65 °C</td> <td>75 °C</td> <td>85 °C</td> </tr> <tr> <td>2.24</td> <td>2.00</td> <td>1.73</td> <td>1.41</td> <td>1.00</td> </tr> </table> <p>Frequency</p> <table border="1"> <tr> <td></td> <td>60 Hz</td> <td>120 Hz</td> <td>300 Hz</td> <td>1000 Hz</td> <td>≥10 kHz</td> </tr> <tr> <td>16 – 100 V</td> <td>0.90</td> <td>1.00</td> <td>1.05</td> <td>1.10</td> <td>1.15</td> </tr> </table>	45 °C	55 °C	65 °C	75 °C	85 °C	2.24	2.00	1.73	1.41	1.00		60 Hz	120 Hz	300 Hz	1000 Hz	≥10 kHz	16 – 100 V	0.90	1.00	1.05	1.10	1.15
45 °C	55 °C	65 °C	75 °C	85 °C																			
2.24	2.00	1.73	1.41	1.00																			
	60 Hz	120 Hz	300 Hz	1000 Hz	≥10 kHz																		
16 – 100 V	0.90	1.00	1.05	1.10	1.15																		
Low Temperature Characteristics	Impedance ratio: $Z_{-20°C} / Z_{+25°C}$ ≤ 8 (16–50 Vdc) ≤ 4 (63–75Vdc)																						
Endurance Life Test	Endurance, 5000 h at rated voltage and 85 °C Δ Capacitance: $\pm 10\%$ ESR $\leq 200\%$ of limit DCL $\leq 100\%$ of limit																						
Shelf Life Test	Storage, 500 h at 85 °C Δ Capacitance: $\pm 10\%$ ESR $\leq 175\%$ of limit DCL $\leq 200\%$ of limit																						
Vibration	10 to 500 Hz, 0.75 mm or 10 g* if less, 3 directions, 2 h ea Δ Capacitance: $\pm 5\%$ no visible damage or leakage *15 g if rilled construction																						
RoHS Compliant																							

Type 3199 Aluminum Electrolytic, Screw Terminals


Screw Terminal Capacitors for Power Output Filtering

Part Numbering System

3199 Type	BA Case Code	393 Capacitance 393=39000 µF 125=1.2 F	M Tolerance M= ±20% S= -10 +30% T= -10 +50% U= -10 +75%	7R5 Voltage 7R5=7.5 Vdc 020=20 Vdc	M Terminal A=high post B=low post D=high current low post K=high current high post M=M5 high post J=M6 low post	P Insulation P = 0.008" PVC H = 0.012" PVC N = none With mounting bracket: R = 0.008" PVC J = 0.012" PVC X = None	A1 Construction* A1=compression R1=rilled S1=stud & compression T1=stud & rilled
-------------------	----------------------	--	---	--	---	---	--

* Construction code is also a sequence number, e.g., A1, A2,--,A9, B1,B2,--, for customer specifications. Sequence number 1 in A1, R1, S1 and T1 denotes the standard catalog capacitor with no special requirements.

Outline Drawing

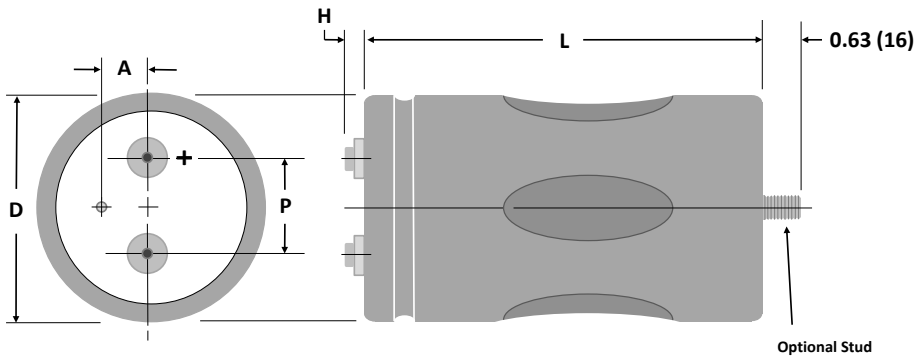

Stud Dimensions

Case	Stud	P ± 0.039"
Diam.	Thread	(±1.0 mm)
1.375	M8	0.470" (12.0)
1.750	M8	0.470" (12.0)
2.000	M12	0.630" (16.0)
2.500	M12	0.630" (16.0)
3.000	M12	0.630" (16.0)

Insulation Dimensions

Code	Clamp Bracket	Insulation Type	Dimension Adders		
			D	L	H
Dimensions in Inches					
P	no	0.008" PVC	+0.02	+0.032	+0.024
H	no	0.012" PVC	+0.03	+0.062	+0.045
N	no	none	-	-	-
R	yes	0.008" PVC	+0.02	+0.032	+0.024
J	yes	0.012" PVC	+0.03	+0.062	+0.045
X	yes	none	-	-	-

Can Dimensions Insulation Adders

	Diameter (D)		Length (L)		Standing Height (H)	
	(in)	(mm)	(in)	(mm)	(in)	(mm)
0.008" PVC	0.02	0.51	0.032	0.81	0.024	0.61

Terminal Dimensions

Terminal Style	For Case Diameters	Code	Post Diameter		H max		Thread	min Full Thread		Torque	
			in	mm	in	mm		in	mm	in-lb	N-m
Low Post	1 3/8 to 3	B	0.314	8.0	0.094	2.4	10-32	0.218	5.5	25	2.82
High Post	1 3/8 to 3	A	0.314	8.0	0.281	7.1	10-32	0.375	9.5	25	2.82
High Current, Low	2 1/2 & 3	D	0.684	17.4	0.125	3.2	1/4-28	0.344	8.7	50	5.65
High Current, High	2 1/2 & 3	K	0.684	17.4	0.281	7.1	1/4-28	0.469	11.9	60	6.78
M5 High Post	1 3/8 to 2	M	0.314	8.0	0.281	7.1	M5	0.375	9.5	25	2.82
M6 Low Post	2 1/2 & 3	J	0.684	17.4	0.125	3.2	M6	0.344	8.7	50	5.65

Type 3199 Aluminum Electrolytic, Screw Terminals

Screw Terminal Capacitors for Power Output Filtering

Case Dimensions, Uninsulated Bare Can

Case Code	Diameter (D)		Length (L)		Pitch (P)		Plug (A)		Typical		Optional Bracket Part No.
	±0.031 (Inches)	±0.79 (mm)	±0.062 (Inches)	±1.157 (mm)	±0.014 (Inches)	±0.356 (mm)	A (Inches)	A (mm)	Weight (oz)	Weight (g)	
BA	1.375	34.9	2.125	54.0	0.500	12.7	0.390	9.9	2.53	72	115058-06
BB	1.375	34.9	2.625	66.7	0.500	12.7	0.390	9.9	3.17	90	115058-06
BC	1.375	34.9	3.125	79.4	0.500	12.7	0.390	9.9	3.70	105	115058-06
BD	1.375	34.9	3.625	92.1	0.500	12.7	0.390	9.9	4.22	120	115058-06
BE	1.375	34.9	4.125	104.8	0.500	12.7	0.390	9.9	4.75	135	115058-06
BF	1.375	34.9	4.625	117.5	0.500	12.7	0.390	9.9	5.98	170	115058-06
BG	1.375	34.9	5.125	130.2	0.500	12.7	0.390	9.9	7.74	220	115058-06
BH	1.375	34.9	5.625	142.9	0.500	12.7	0.390	9.9	9.50	270	115058-06
DA	1.75	44.5	2.125	54.0	0.750	19.1	0.453	11.5	5.63	160	115058-15
DB	1.75	44.5	2.625	66.7	0.750	19.1	0.453	11.5	6.16	175	115058-15
DC	1.75	44.5	3.125	79.4	0.750	19.1	0.453	11.5	6.34	180	115058-15
DD	1.75	44.5	3.625	92.1	0.750	19.1	0.453	11.5	7.22	205	115058-15
DE	1.75	44.5	4.125	104.8	0.750	19.1	0.453	11.5	7.74	220	115058-15
DF	1.75	44.5	4.625	117.5	0.750	19.1	0.453	11.5	8.27	235	115058-15
DG	1.75	44.5	5.125	130.2	0.750	19.1	0.453	11.5	8.80	250	115058-15
DH	1.75	44.5	5.625	142.9	0.750	19.1	0.453	11.5	9.50	270	115058-15
EA	2	50.8	2.125	54.0	0.875	22.2	0.500	12.7	5.98	170	115058-09
EB	2	50.8	2.625	66.7	0.875	22.2	0.500	12.7	6.34	180	115058-09
EC	2	50.8	3.125	79.4	0.875	22.2	0.500	12.7	6.69	190	115058-09
ED	2	50.8	3.625	92.1	0.875	22.2	0.500	12.7	7.74	220	115058-09
EE	2	50.8	4.125	104.8	0.875	22.2	0.500	12.7	8.98	255	115058-09
EF	2	50.8	4.625	117.5	0.875	22.2	0.500	12.7	10.21	290	115058-09
EG	2	50.8	5.125	130.2	0.875	22.2	0.500	12.7	11.26	320	115058-09
EH	2	50.8	5.625	142.9	0.875	22.2	0.500	12.7	8.80	250	115058-09
FB	2.5	63.5	2.625	66.7	1.125	28.6	0.625	15.9	10.56	300	115058-14
FC	2.5	63.5	3.125	79.4	1.125	28.6	0.625	15.9	13.02	370	115058-14
FD	2.5	63.5	3.625	92.1	1.125	28.6	0.625	15.9	14.08	400	115058-14
FE	2.5	63.5	4.125	104.8	1.125	28.6	0.625	15.9	15.66	445	115058-14
FF	2.5	63.5	4.625	117.5	1.125	28.6	0.625	15.9	21.12	600	115058-14
FG	2.5	63.5	5.125	130.2	1.125	28.6	0.625	15.9	22.88	650	115058-14
FH	2.5	63.5	5.625	142.9	1.125	28.6	0.625	15.9	21.12	600	115058-14
GC	3	76.2	3.125	79.4	1.250	31.8	0.750	19.1	18.30	520	115058-11
GD	3	76.2	3.625	92.1	1.250	31.8	0.750	19.1	20.06	570	115058-11
GE	3	76.2	4.125	104.8	1.250	31.8	0.750	19.1	21.12	600	115058-11
GF	3	76.2	4.625	117.5	1.250	31.8	0.750	19.1	25.34	720	115058-11
GG	3	76.2	5.125	130.2	1.250	31.8	0.750	19.1	29.92	850	115058-11
GH	3	76.2	5.625	142.9	1.250	31.8	0.750	19.1	34.14	970	115058-11
GJ	3	76.2	5.875	149.2	1.250	31.8	0.750	19.1	36.96	1050	115058-11
GN	3	76.2	8.625	219.1	1.250	31.8	0.750	19.1	51.39	1460	115058-11

Type 3199 Aluminum Electrolytic, Screw Terminals

Screw Terminal Capacitors for Power Output Filtering

Ratings

Cap (μ F)	Catalog Part Number	ESR max 120 Hz 25 °C (m Ω)	Ripple max 120 Hz 85 °C		Case Size DxL (in)
			compress(A)	rilled(A)	
7.5 Vdc (9 Vdc Surge)					
39000	3199BA393M7P5APA1	9.4	8.1	8.8	1.375x2.125
47000	3199BB473M7P5APA1	9.6	8.8	9.5	1.375x2.625
56000	3199BC563M7P5APA1	7.9	10.4	11.2	1.375x3.125
68000	3199BD683M7P5APA1	6.8	11.8	12.7	1.375x3.625
82000	3199BD823M7P5APA1	6.0	12.7	13.7	1.375x3.625
100000	3199BF104M7P5APA1	5.2	15.1	16.3	1.375x4.625
120000	3199BG124M7P5APA1	4.4	17.1	18.5	1.375x4.125
150000	3199DD154M7P5APA1	4.6	16.6	18.1	1.75x3.625
180000	3199DE184M7P5APA1	4.2	18.3	20.0	1.75x4.125
220000	3199DG224M7P5APA1	3.4	22.3	24.4	1.75x5.125
270000	3199EF274M7P5APA1	3.8	21.5	23.6	2.00x4.625
330000	3199EH334M7P5APA1	3.9	23.3	25.5	2.00x5.625
390000	3199FE394M7P5APA1	2.6	28.6	31.7	2.50x4.125
470000	3199FG474M7P5APA1	2.5	31.3	34.7	2.50x5.125
560000	3199FH564M7P5APA1	2.2	35.3	39.2	2.50x5.625
680000	3199GF684M7P5APA1	2.2	37.6	40.5	3.00x4.625
820000	3199GH824M7P5APA1	2.2	40.2	43.3	3.00x5.625
1200000	3199GN125M7P5APA1	1.9	46.4	50.0	3.00x8.625
10 Vdc (13 Vdc Surge)					
33000	3199BA333M010APA1	9.6	8.1	8.8	1.375x2.125
39000	3199BB393M010APA1	8.4	9.4	10.2	1.375x2.625
47000	3199BC473M010APA1	7.5	10.3	11.1	1.375x3.125
56000	3199BC563M010APA1	6.9	11.1	12.0	1.375x3.125
68000	3199BD683M010APA1	6.1	12.6	13.6	1.375x3.625
82000	3199BE823M010APA1	5.5	4.7	5.1	1.375x4.125
100000	3199BG104M010APA1	4.5	17.1	18.5	1.375x5.125
120000	3199DD124M010APA1	4.6	16.5	18.0	1.75x3.625
150000	3199DE154M010APA1	4.2	18.2	19.9	1.75x4.125
180000	3199DG184M010APA1	3.8	12.0	13.1	1.75x5.125
220000	3199DH224M010APA1	3.2	23.8	26.0	1.75x5.625
270000	3199EG274M010APA1	3.6	23.2	25.4	2.00x5.125
330000	3199FE334M010APA1	2.6	28.5	31.6	2.50x4.125
390000	3199FF394M010APA1	2.4	30.9	34.3	2.50x4.625
470000	3199FH474M010APA1	2.4	33.3	37.0	2.50x5.625
560000	3199GF564M010APA1	2.2	37.5	40.4	3.00x4.625
680000	3199GH684M010APA1	2.2	40.1	43.2	3.00x5.625
1200000	3199GN125M010APA1	1.7	46.4	50.0	3.00x8.625
16 Vdc (20.8 Vdc Surge)					
22000	3199BA223M016APA1	24.6	5.0	5.4	1.375x2.125
27000	3199BB273M016APA1	21.3	5.9	6.4	1.375x2.625
39000	3199BC393M016APA1	17.1	7.0	7.6	1.375x3.125
47000	3199BD473M016APA1	14.8	8.1	8.7	1.375x3.625
56000	3199BE563M016APA1	13.3	9.0	9.7	1.375x4.125
68000	3199BG683M016APA1	10.3	11.2	12.1	1.375x5.125
82000	3199BH823M016APA1	9.8	12.0	13.0	1.375x5.625
100000	3199DE104M016APA1	7.0	14.1	15.4	1.75x4.125
120000	3199DF124M016APA1	5.8	16.2	17.7	1.75x4.625
150000	3199DH154M016APA1	5.2	18.7	20.4	1.75x5.625
180000	3199EG184M016APA1	3.7	23.0	25.2	2.00x5.125

Type 3199 Aluminum Electrolytic, Screw Terminals

Screw Terminal Capacitors for Power Output Filtering

Cap (μ F)	Catalog Part Number	ESR max 120 Hz 25 °C (m Ω)	Ripple max 120 Hz 85 °C compress(A) rilled(A)		Case Size DxL (in)
16 Vdc (20.8 Vdc Surge)					
220000	3199FE224M016APA1	3.5	24.4	27.1	2.50x4.125
270000	3199FF274M016APA1	3.2	26.7	29.6	2.50x4.625
330000	3199GE334M016APA1	3.1	30.2	32.5	3.00x4.125
390000	3199GF394M016APA1	2.8	32.9	35.5	3.00x4.625
470000	3199GH474M016APA1	2.5	37.7	40.6	3.00x5.625
820000	3199GN824M016APA1	2.2	46.4	50.0	3.00x8.625
25 Vdc (32.5 Vdc Surge)					
18000	3199BA183M025APA1	24.8	5.0	5.4	1.375x2.125
27000	3199BC273M025APA1	17.4	6.9	7.5	1.375x3.125
33000	3199BD333M025APA1	15.0	8.0	8.6	1.375x3.625
39000	3199BE393M025APA1	13.5	8.9	9.6	1.375x4.125
47000	3199BG473M025APA1	10.5	11.1	12.0	1.375x5.125
56000	3199BH563M025APA1	9.9	2.7	2.9	1.375x5.625
68000	3199DE683M025APA1	7.1	14.0	15.3	1.75x4.125
82000	3199DF823M025APA1	5.9	16.0	17.5	1.75x4.625
100000	3199DG104M025APA1	5.5	17.4	19.0	1.75x5.125
120000	3199EF124M025APA1	4.0	21.3	23.3	2.00x4.625
150000	3199EH154M025APA1	3.5	24.4	26.7	2.00x5.625
180000	3199FF184M025APA1	3.3	26.4	29.3	2.50x4.625
220000	3199FG224M025APA1	3.0	28.5	31.6	2.50x5.125
270000	3199FG274M025APA1	2.8	31.7	35.2	2.50x5.125
330000	3199GG334M025APA1	2.6	35.3	38.0	3.00x5.125
560000	3199GN564M025APA1	2.2	46.4	50.0	3.00x8.625
40 Vdc (50.2 Vdc Surge)					
10000	3199BA103M040APA1	32.0	4.4	4.8	1.375x2.125
12000	3199BB123M040APA1	27.4	5.2	5.6	1.375x2.625
15000	3199BC153M040APA1	18.2	6.8	7.4	1.375x3.125
18000	3199BD183M040APA1	15.7	7.9	8.5	1.375x3.625
22000	3199BE223M040APA1	14.0	8.7	9.4	1.375x4.125
27000	3199BF273M040APA1	13.5	9.3	10.1	1.375x4.625
33000	3199BH333M040APA1	11.8	10.9	11.8	1.375x5.625
39000	3199DD393M040APA1	9.4	11.5	12.6	1.75x3.625
47000	3199DE473M040APA1	8.4	12.9	14.1	1.75x4.125
56000	3199DG563M040APA1	6.6	15.9	17.4	1.75x5.125
68000	3199DH683M040APA1	6.1	17.2	18.8	1.75x5.625
82000	3199EG823M040APA1	4.3	21.2	23.2	2.00x5.125
100000	3199FE104M040APA1	4.3	22.2	24.6	2.50x4.125
120000	3199FF124M040APA1	3.9	24.3	27.0	2.50x4.625
150000	3199FH154M040APA1	3.4	28.1	31.2	2.50x5.625
180000	3199GG184M040APA1	3.1	32.3	34.8	3.00x5.125
220000	3199GH224M040APA1	2.9	34.6	37.3	3.00x5.625
330000	3199GN334M040APA1	2.2	46.4	50.0	3.00x8.625
50 Vdc (65 Vdc Surge)					
8200	3199BA822M050APA1	41.0	3.9	4.2	1.375x2.125
10000	3199BB103M050APA1	34.9	4.6	5.0	1.375x2.625
12000	3199BC123M050APA1	27.6	5.6	6.0	1.375x3.125
15000	3199BD153M050APA1	23.2	6.4	6.9	1.375x3.625
18000	3199BE183M050APA1	20.3	7.2	7.8	1.375x4.125
22000	3199BF223M050APA1	16.6	8.4	9.1	1.375x4.625

Type 3199 Aluminum Electrolytic, Screw Terminals

Screw Terminal Capacitors for Power Output Filtering

Cap (μ F)	Catalog Part Number	ESR max 120 Hz 25 °C (m Ω)	Ripple max 120 Hz 85 °C		Case Size DxL (in)
			compress(A)	rilled(A)	
50 Vdc (65 Vdc Surge)					
27000	3199BH273M050APA1	14.2	9.9	10.7	1.375x5.625
33000	3199DE333M050APA1	9.8	11.9	13.0	1.75x4.125
39000	3199DF393M050APA1	8.2	13.6	14.9	1.75x4.625
47000	3199DG473M050APA1	7.5	14.9	16.3	1.75x5.125
56000	3199EF563M050APA1	9.6	13.6	14.9	2.00x4.625
68000	3199EH683M050APA1	8.1	16.1	17.6	2.00x5.625
82000	3199FF823M050APA1	6.6	18.6	20.6	2.50x4.625
100000	3199FH104M050APA1	5.6	21.7	24.1	2.50x5.625
120000	3199GF124M050APA1	5.3	23.8	25.7	3.00x4.625
150000	3199GH154M050APA1	4.5	27.9	30.1	3.00x5.625
220000	3199GN224M050APA1	3.5	37.7	40.6	3.00x8.625
63 Vdc (81.9 Vdc Surge)					
4700	3199BA472M063APA1	41.5	3.9	4.2	1.375x2.125
5600	3199BB562M063APA1	35.4	4.5	4.9	1.375x2.625
6800	3199BB682M063APA1	32.4	5.0	5.4	1.375x2.625
8200	3199BC822M063APA1	27.5	5.6	6.0	1.375x3.125
10000	3199BD103M063APA1	23.2	6.5	7.0	1.375x3.625
12000	3199BE123M063APA1	20.3	7.3	7.9	1.375x4.125
15000	3199BG153M063APA1	15.5	9.2	9.9	1.375x5.125
18000	3199BH183M063APA1	14.3	9.9	10.7	1.375x5.625
22000	3199DE223M063APA1	10.0	11.8	12.9	1.75x4.125
27000	3199DG273M063APA1	7.8	14.7	16.0	1.75x5.125
33000	3199DH333M063APA1	7.2	15.8	17.3	1.75x5.625
39000	3199EG393M063APA1	8.6	15.0	16.4	2.00x5.125
47000	3199FE473M063APA1	7.5	16.6	18.4	2.50x4.125
56000	3199FF563M063APA1	6.7	18.4	20.4	2.50x4.625
68000	3199FH683M063APA1	5.7	21.5	23.9	2.50x5.625
82000	3199GF823M063APA1	5.3	23.7	25.6	3.00x4.625
100000	3199GH104M063APA1	4.5	27.7	29.9	3.00x5.625
150000	3199GN154M063APA1	3.6	37.4	40.3	3.00x8.625
75 Vdc (97.5 Vdc Surge)					
3900	3199BA392M075APA1	42.5	3.8	4.1	1.375x2.125
4700	3199BB472M075APA1	36.2	4.5	4.9	1.375x2.625
5600	3199BB562M075APA1	32.6	5.0	5.4	1.375x2.625
6800	3199BC682M075APA1	28.1	5.5	5.9	1.375x3.125
8200	3199BD822M075APA1	23.7	6.4	6.9	1.375x3.625
10000	3199BE103M075APA1	20.7	7.2	7.8	1.375x4.125
12000	3199BG123M075APA1	15.8	9.1	9.8	1.375x5.125
15000	3199DD153M075APA1	11.6	10.3	11.3	1.75x3.625
18000	3199DE183M075APA1	10.2	11.6	12.7	1.75x4.125
22000	3199DG223M075APA1	8.0	14.5	15.8	1.75x5.125
27000	3199EF273M075APA1	9.6	13.6	14.9	2.00x4.625
33000	3199EH333M075APA1	8.2	16.0	17.5	2.00x5.625
39000	3199FF393M075APA1	6.9	18.1	20.1	2.50x4.625
47000	3199FG473M075APA1	6.3	19.7	21.9	2.50x5.125
56000	3199FH563M075APA1	5.8	21.3	23.7	2.50x5.625
68000	3199GG683M075APA1	5.0	25.5	27.5	3.00x5.125
82000	3199GH823M075APA1	4.6	27.6	29.7	3.00x5.625
120000	3199GN124M075APA1	3.6	37.2	40.1	3.00x8.625

Notice and Disclaimer: All product drawings, descriptions, specifications, statements, information and data (collectively, the "Information") in this datasheet or other publication are subject to change. The customer is responsible for checking, confirming and verifying the extent to which the Information contained in this datasheet or other publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without any guarantee, warranty, representation or responsibility of any kind, expressed or implied. Statements of suitability for certain applications are based on the knowledge that the Cornell Dubilier company providing such statements ("Cornell Dubilier") has of operating conditions that such Cornell Dubilier company regards as typical for such applications, but are not intended to constitute any guarantee, warranty or representation regarding any such matter – and Cornell Dubilier specifically and expressly disclaims any guarantee, warranty or representation concerning the suitability for a specific customer application, use, storage, transportation, or operating environment. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by Cornell Dubilier with reference to the use of any Cornell Dubilier products is given gratis (unless otherwise specified by Cornell Dubilier), and Cornell Dubilier assumes no obligation or liability for the advice given or results obtained. Although Cornell Dubilier strives to apply the most stringent quality and safety standards regarding the design and manufacturing of its products, in light of the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies or other appropriate protective measures) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage. Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated in such warnings, cautions and notes, or that other safety measures may not be required.