
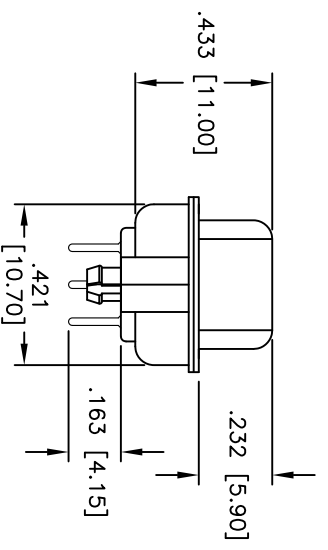
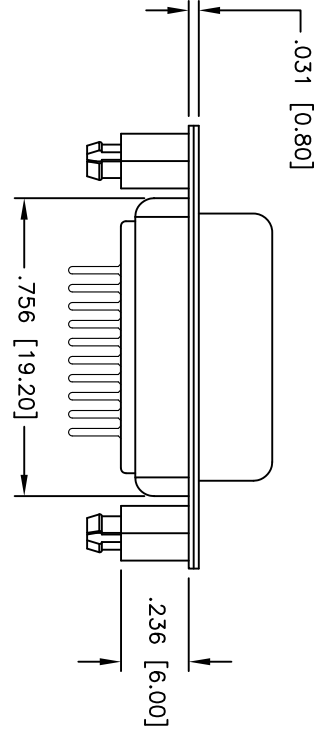
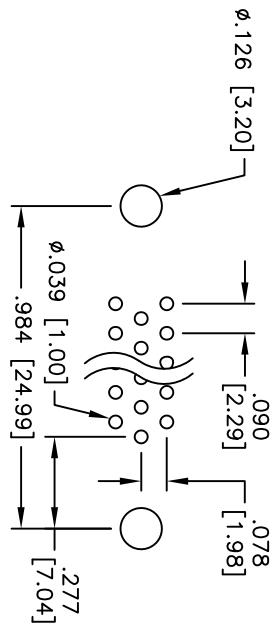


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/5/05	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

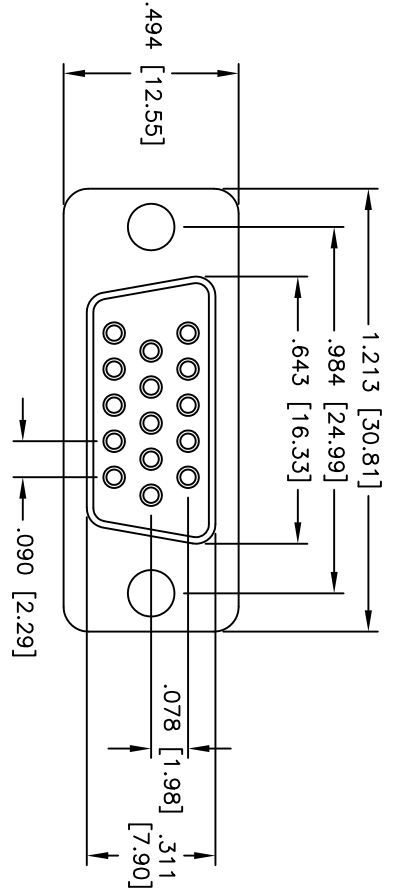

**SPECIFICATIONS:**

- Material: PBT, glass reinforced, rated UL 94V-0
- Insulator color: Black
- Contact: Phosphor Bronze
- Shell: Steel, Tin plated
- Hardware: Brass, Nickel plated
- Plating: Gold flash over Nickel underplate overall

- Electrical:
  - Operating voltage: 250 VAC max
  - Current rating: 5 Amps max
  - Contact resistance: 20 mohms max
  - Insulation resistance: 5,000 Mohms min
  - Dielectric withstanding voltage: 1,000 VAC for 1 minute
- Temperature Rating:
  - Operating temperature: -65°C to +125°C



Lead free, RoHS compliant  
 Recommended soldering temp: 235°C for 5 seconds

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN SS	5/5/05
CHECKED	
APPROVED	

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE	15 POS. HIGH DENSITY D-SUB SOCKET
	RIVETED #4-40 STANDOFFS W/BOARDLOCKS
SIZE	PART NO.
X	HDT15-ST-BL
REF:	SCALE: NTS
	SHEET 1 OF 1