



# TAI-SAW TECHNOLOGY CO., LTD.

5

## SAW Filter 412.5 MHz 19MHz BW SMD 3.8x3.8mm

### A. MAXIMUM RATING:

RoHS Compliant  
Lead free  
Lead-free soldering


5  
5 E S D (ESD

### B. ELECTRICAL CHARACTERISTICS:


			5	
			5	
(		5	5	
5			55	
			5	
			5	
			5	

### C. FREQUENCY CHARACTERISTICS:


#### Wideband response: (span 1GHz)

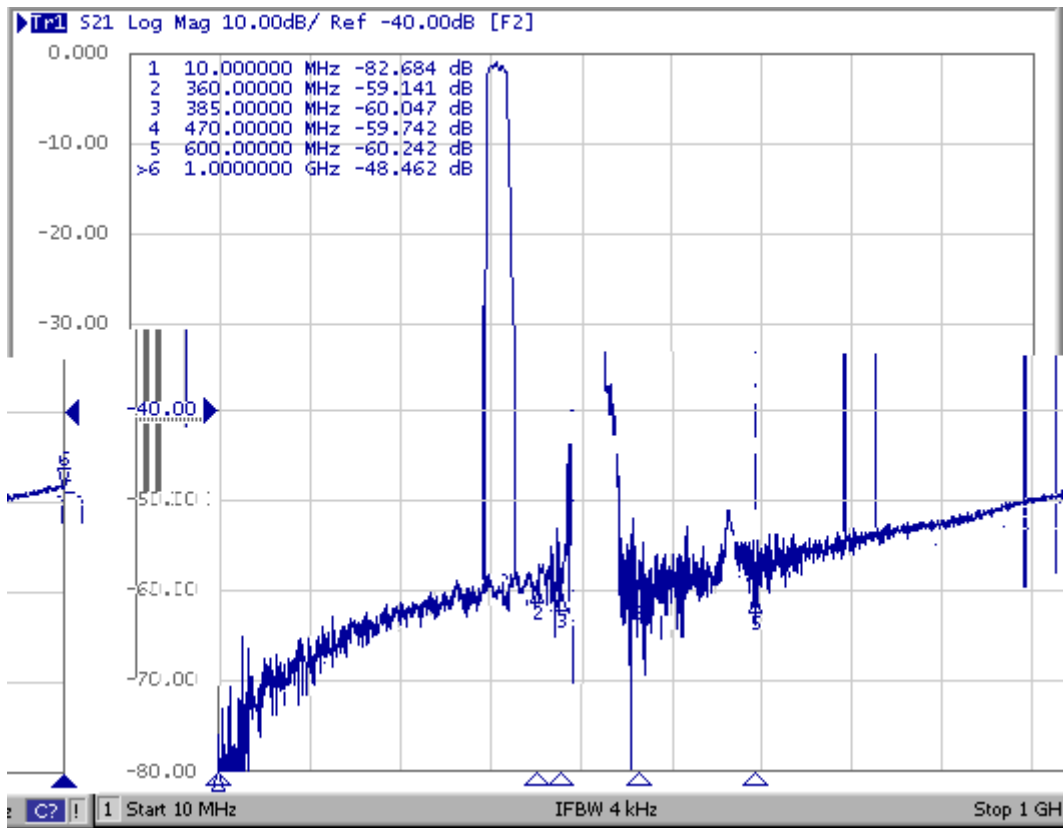


#### S21 response: (span 200MHz)

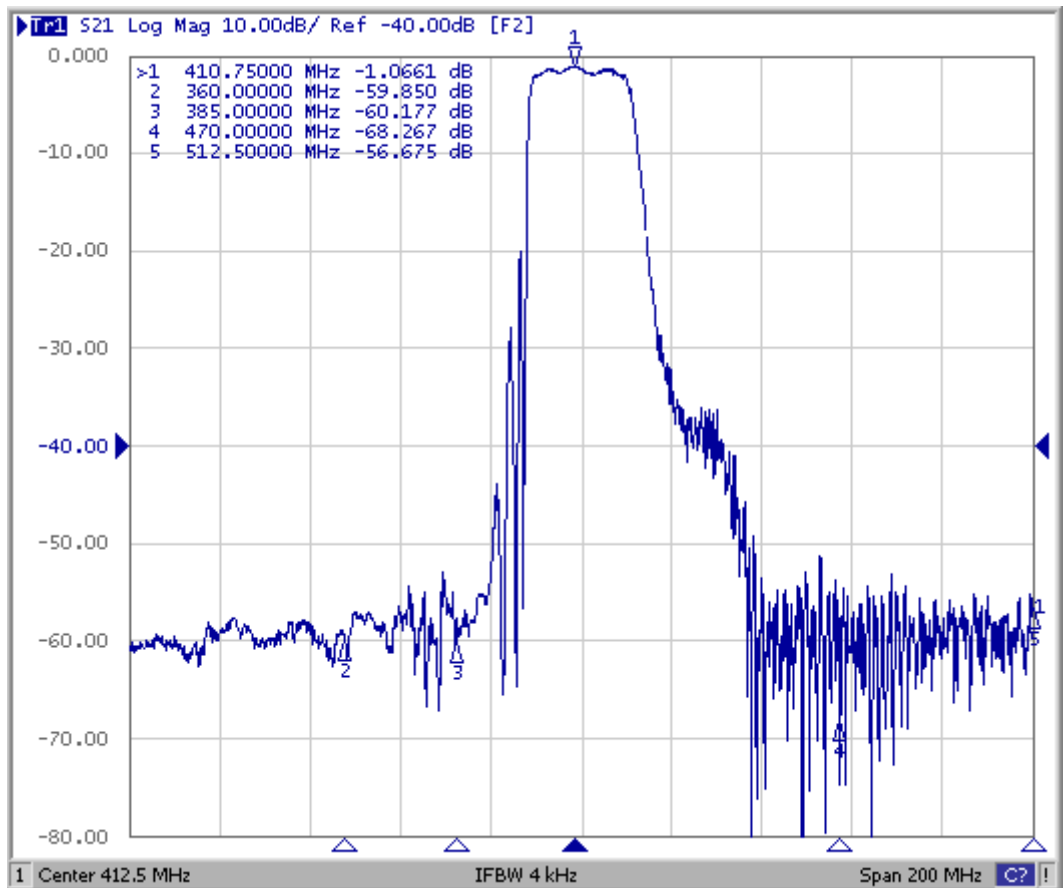

**Passband response: (span 40MHz)**

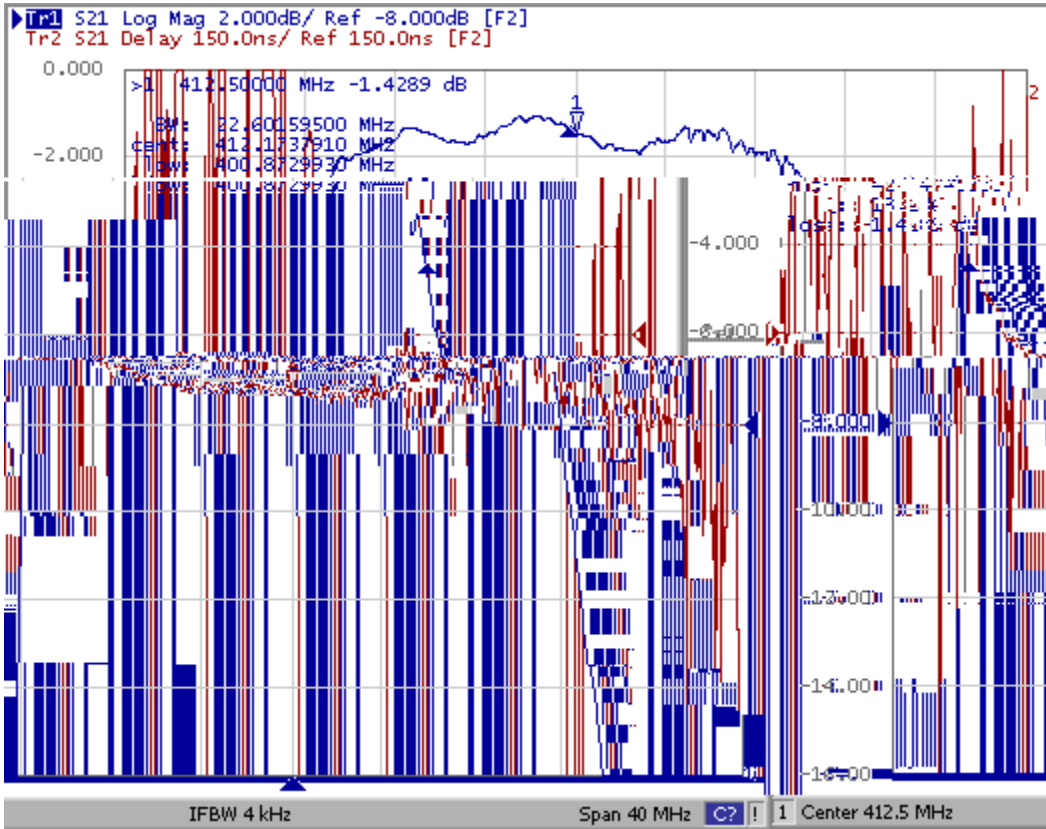

**D. MEASUREMENT CIRCUIT:**

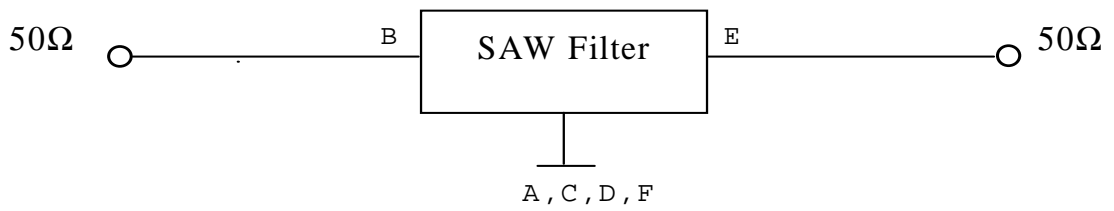



**G. PACKING:**

( 5

