液晶之友 电话：020-33819067
Http://www.lcdfriends.com

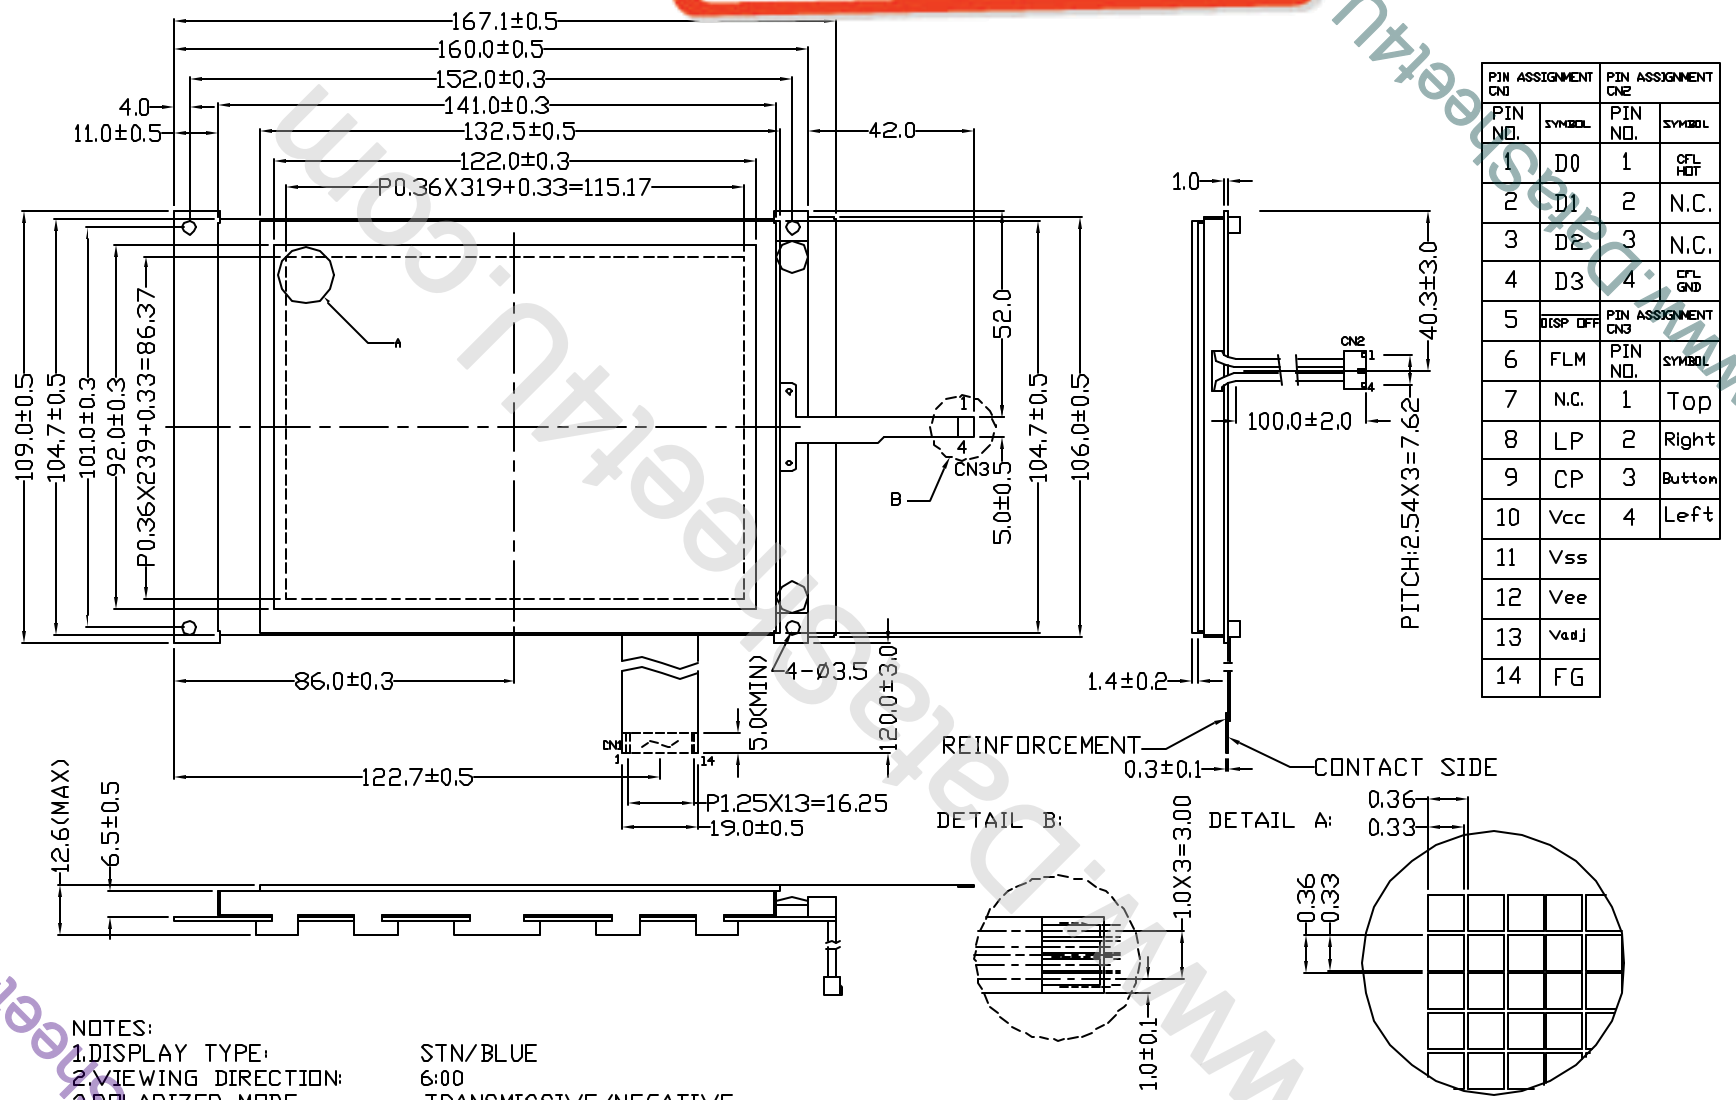

PIN ASSIGNMENT CN1		PIN ASSIGNMENT CN2	
PIN NO.	SYMBOL	PIN NO.	SYMBOL
1	D0	1	CFL HOT
2	D1	2	N.C.
3	D2	3	N.C.
4	D3	4	CFL GND
5	DISP OFF	PIN ASSIGNMENT CN3	
6	FLM	PIN NO.	SYMBOL
7	N.C.	1	Top
8	LP	2	Right
9	CP	3	Button
10	Vcc	4	Left
11	Vss		
12	Vee		
13	Vadj		
14	FG		

NOTES:
1.DISPLAY TYPE: STN/BLUE
2.VIEWING DIRECTION: 6:00
3.POLARIZER MODE: TRANSMISSIVE/NEGATIVE
4.OPERATING TEMP: 0°C-+50°C
5.STORAGE TEMP: -20°C-+60°C
6.LCD OPERATING VOLTAGE: 22.6V
7.DRIVE METHOD: 1/240 DUTY 1/16 BIAS
8.UNMARKED TOLERANCE: ±0.3mm
9.BACKLIGHT TYPE: CCFL
10.IC: KS0086TQ
11.BEZEL IS TO BE PAINTED WITH ZINC(WHITE)

TIAN-MA MICROELECTRONICS CO.
6/F., CASTIC Building, Shennan Road, Central, Shenzhen, China

DRAWN BY:	TITLE: TM320240DFG1		
CHECKED BY:			
APPROVED BY:	DWG NO: G-1	SCALE:	
CONFIRMED BY:	DWG NAME: TM320240DFG1G-L	SHEET NO:	OF

www.DataSheet4U.com