


## Photovoltaic MOSFET drivers of wide variation

## Photovoltaic MOSFET Driver (APV1, 2)

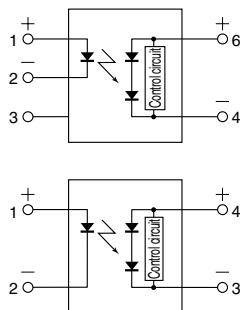

**RoHS compliant**

### FEATURES

#### 1. High-speed switching

Since release time is typ. 0.1 ms, the MOSFET can be turned off quickly in a urgent situation.

#### 2. High insulation

DIP type: 5,000 V

SOP type: 2,500 V

SSOP type: 1,500 V

#### 3. Extensive product lineup

Products include SSOP, SOP4-pin and DIP6-pin.

### TYPICAL APPLICATIONS

- Power supply (Vcc) for electronic circuits
- Driving MOSFET

### TYPES

Output rating		Package	Part No.			Packing quantity		
Drop-out voltage (Typ.)	Short circuit current (Typ.)		Through hole terminal	Surface-mount terminal				
			Tube packing style	Tube packing style	Tape and reel packing style	Tube	Tape and reel	
8.7V	14µA	DIP6-pin	APV1122	APV1122A	APV1122AX	APV1122AZ	1 tube contains 50 pcs. 1 batch contains 500 pcs.	
8.7V	14µA	SOP4-pin <sup>*3</sup>	—	APV1121S	APV1121SX	APV1121SZ	1,000 pcs.	
8.2V	8µA		—	APV2121S	APV2121SX	APV2121SZ		
8.2V	8µA		—	APV2111VY	APV2111VW	—		

Notes: \*1 SOP type is picked from 1/2-pin side, SSOP type is picked from 1/4-pin side.

\*2 SOP type is picked from 3/4-pin side, SSOP type is picked from 2/3-pin side.

\*3 For space reasons, the two initial letters of the part number "AP", package (SOP) indicator "S" and the packing style indicator "X" or "Z" are not marked on the device. (Ex. the label for product number APV1121SX is V1121).

\*4 Tape and reel package is the standard packing style.

For space reasons, the two initial letters of the part number "AP", package (SSOP) indicator "V" and the packing style are not marked on the device. (Ex. the label for product number APV2111VY is V2111).

### RATING

#### 1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


Item		Symbol	APV1122(A)	APV1121S	APV2121S	APV2111V	Remarks
Input	LED forward current	I <sub>F</sub>		50mA			
	LED reverse voltage	V <sub>R</sub>		5V			
	Peak forward current	I <sub>FP</sub>		1A			f = 100 Hz, Duty Ratio = 0.1%
	Power dissipation	P <sub>in</sub>		75mW			
I/O isolation voltage		V <sub>iso</sub>	5,000V AC	2,500V AC	2,500V AC	1,500V AC	
Temperature limits	Operating	T <sub>opr</sub>		−40°C to +85°C −40°F to +185°F			Non-condensing at low temperatures
	Storage	T <sub>stg</sub>		−40°C to +100°C −40°F to +212°F			

# Photovoltaic MOSFET Driver


## 2. Electrical characteristics (Ambient temperature: 25°C 77°F)

	Item	Symbol	APV1122(A)	APV1121S	APV2121S	APV2111V	Condition
Input	LED operate current	Typical Maximum	I <sub>Fon</sub>	0.6mA	0.85mA	V <sub>OC</sub> = 5V	
				3mA			
	LED turn off current	Minimum Typical	I <sub>Foff</sub>	0.2mA	0.75mA	V <sub>OC</sub> = 1V	
				0.5mA	1.15V	I <sub>F</sub> = 10mA	
Output	LED dropout voltage	Typical Maximum	V <sub>F</sub>	1.15V	1.5V		
				1.5V			
	Drop-out voltage*	Minimum	V <sub>OC</sub>	6V	5V	I <sub>F</sub> = 10mA	
		Typical		8.7V	8.2V		
Transfer characteristics	Short circuit current**	Minimum Typical	I <sub>SC</sub>	5μA	3μA	I <sub>F</sub> = 10mA	
				14μA	8μA		
	Turn on time***	Typical	T <sub>ON</sub>	0.4ms	0.8ms	I <sub>F</sub> = 10mA, C <sub>L</sub> = 1,000pF	
	Turn off time***	Typical	T <sub>OFF</sub>		0.1ms	I <sub>F</sub> = 10mA, C <sub>L</sub> = 1,000pF	
	I/O capacitance	Typical Maximum	C <sub>ISO</sub>	0.8pF		V <sub>B</sub> = 0V, f = 1MHz	
				1.5pF			
	Initial I/O isolation resistance	Minimum	R <sub>ISO</sub>		1,000MΩ		500V DC


\*Drop-out voltage measurement circuit  
APV1122(A)

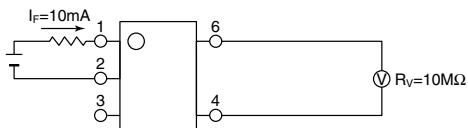


APV1121S, APV2121S, APV2111V

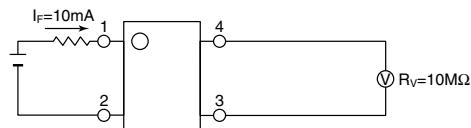


\*\*Short circuit current measurement circuit  
APV1122(A)

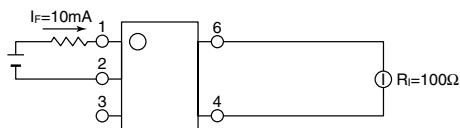


APV1121S, APV2121S, APV2111V

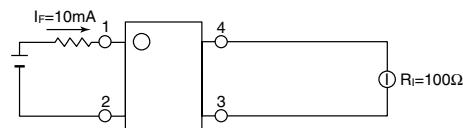


\*\*\*Turn on/Turn off time measurement circuit  
APV1122(A)

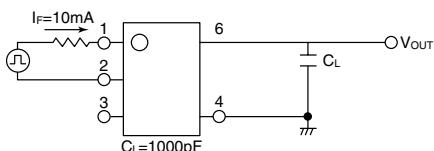

APV1121S, APV2121S, APV2111V

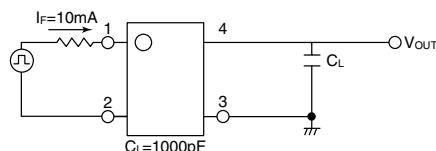

\*\*\*Turn on time

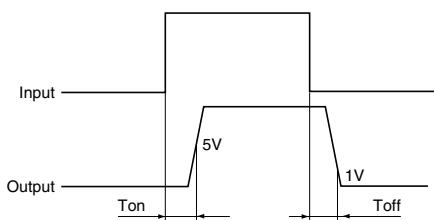

## RECOMMENDED OPERATING CONDITIONS

Please obey the following conditions to ensure proper device operation and resetting.

Item	Symbol	Recommended value	Unit
Input LED current	I <sub>F</sub>	10	mA

### ■ For Dimensions.

### ■ For Schematic and Wiring Diagrams.

### ■ For Cautions for Use.

■ These products are not designed for automotive use.


If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

For more information.


# Photovoltaic MOSFET Driver

## REFERENCE DATA


1. Drop-out voltage vs. ambient temperature characteristics  
Input current: 10mA

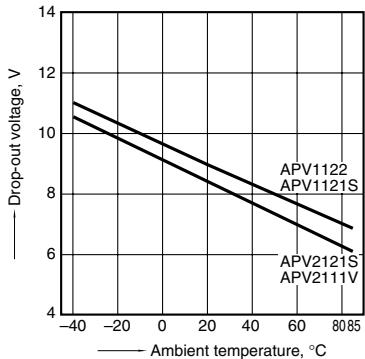


2. Short circuit current vs. ambient temperature characteristics  
Input current: 10mA

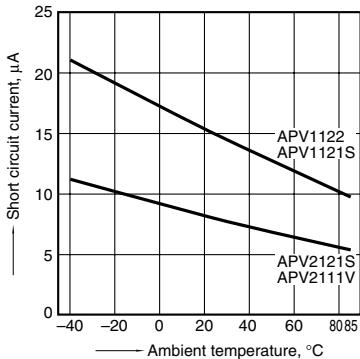


3. LED operate current vs. ambient temperature characteristics  
Drop-out voltage: 5V

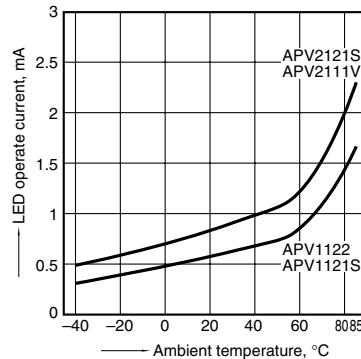


4. LED turn off current vs. ambient temperature characteristics  
Drop-out voltage: 1V

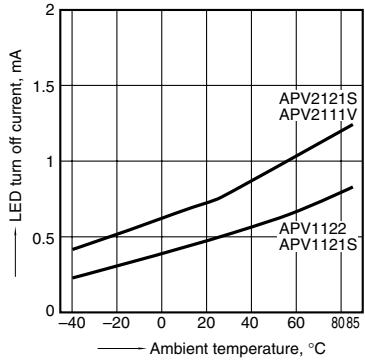


5. LED dropout voltage vs. ambient temperature characteristics  
LED forward current: 5 to 50mA

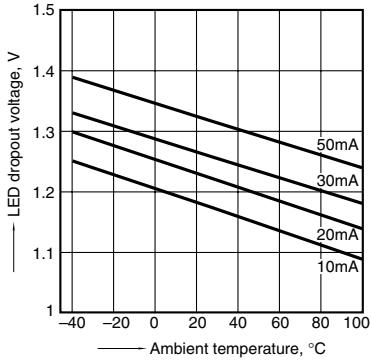


6. Turn on time vs. ambient temperature characteristics  
LED forward current: 10mA  
Load capacity: 1,000pF; output voltage: 5V

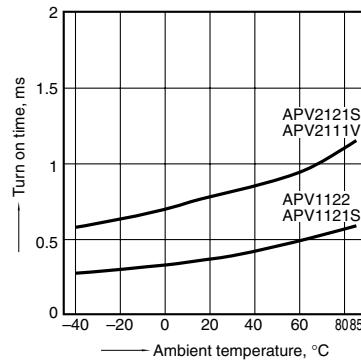


7. Turn off time vs. ambient temperature characteristics  
LED forward current: 10mA  
Load capacity: 1,000pF; output voltage: 1V

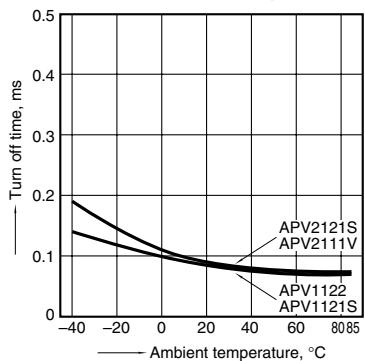


8. Turn on time vs. LED forward current characteristics  
Load capacity: 1,000pF; output voltage: 5V

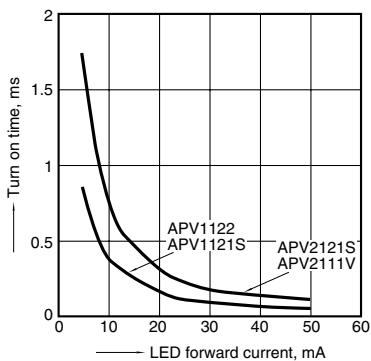

9. Turn off time vs. LED forward current characteristics  
Load capacity: 1,000pF; output voltage: 1V

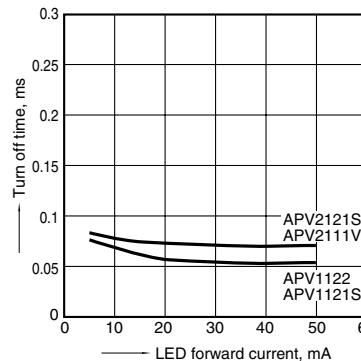

10. Drop-out voltage vs. LED forward current characteristics

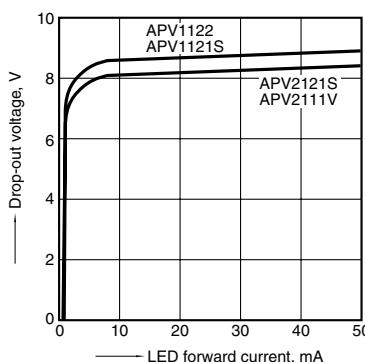

11. Short circuit current vs. LED forward current characteristics

