
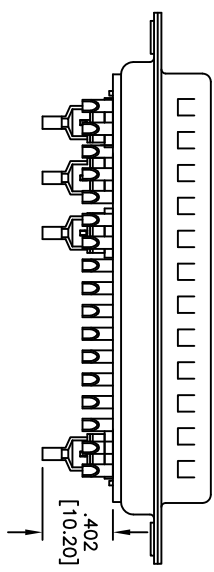



Rev	AWO #	Description	Date	Appr
-		RELEASED	9/15/10	

APPROVED: _____
 DATE: _____ TITLE: _____

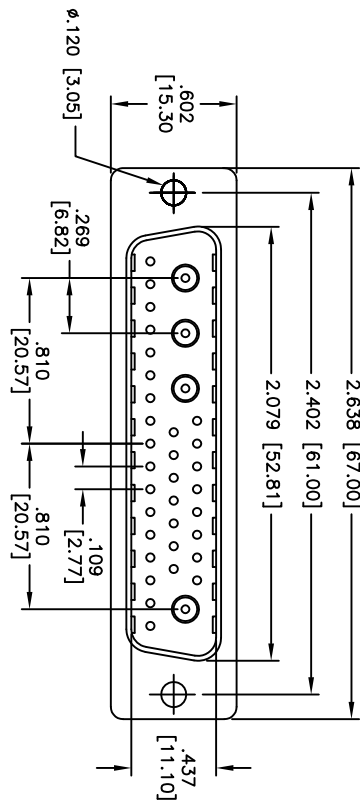

SPECIFICATIONS:

- Material: Insulator: PBT, 30% glass reinforced, rated UL 94V-0
- Insulator color: Black
- Coaxial center Insulator: Teflon
- Coaxial center Insulator color: White
- Contacts: Brass
- Shell: Steel, Tin plated
- Hardware: Brass, Nickel plated
- Plating: Gold flash over Nickel underplate overall

Electrical:

- Operating voltage: 250 VAC max
- Current rating: 10 – 40 Amps max (See Chart)
- Contact resistance: 10 mohms max
- Insulation resistance: 5,000 Mohms min
- Dielectric withstanding voltage: 1,000 VAC for 1 minute
- Temperature Rating: Operating temperature: -55°C to +280°C
- Environmental: Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN AY	9/15/10
CHECKED VW	9/15/10
APPROVED	

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: D-SUB POWER PLUG; D36W4; STRAIGHT, FEMALE, SOLDER CUP

SIZE	PART NO.	REV.
X	D36W4-PD-1-1	
REF:	SCALE: NTS	SHEET 1 OF 1