

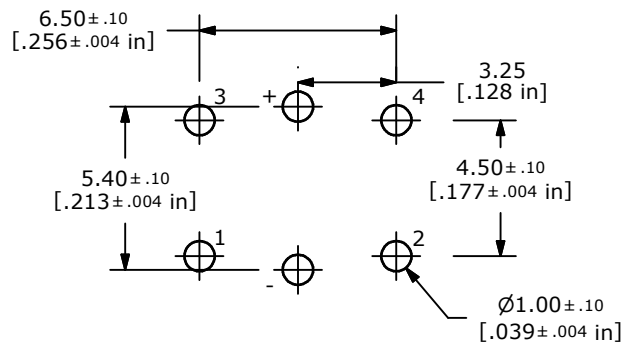
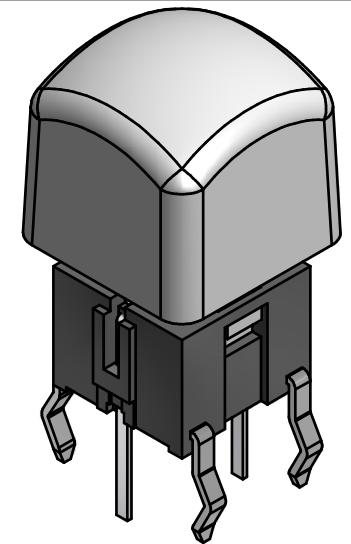
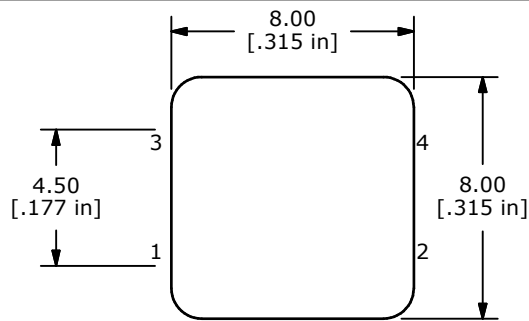


NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. RATING: 50mA @ 12VDC
4. TRAVEL: 0.25 +0.2/0.1mm
- ▲5. OPERATING FORCE: 160±50gf
6. CONTACT RESISTANCE: 100 Milli-Ohms Max
7. 2002/95/EC (ROHS) COMPLIANT
- ▲8. SHORTER LEAD (WITH COLOR) IS NEGATIVE (CATHODE).
- ▲9. LED: BLUE
10. ▲ DENOTES CRITICAL PARAMETER

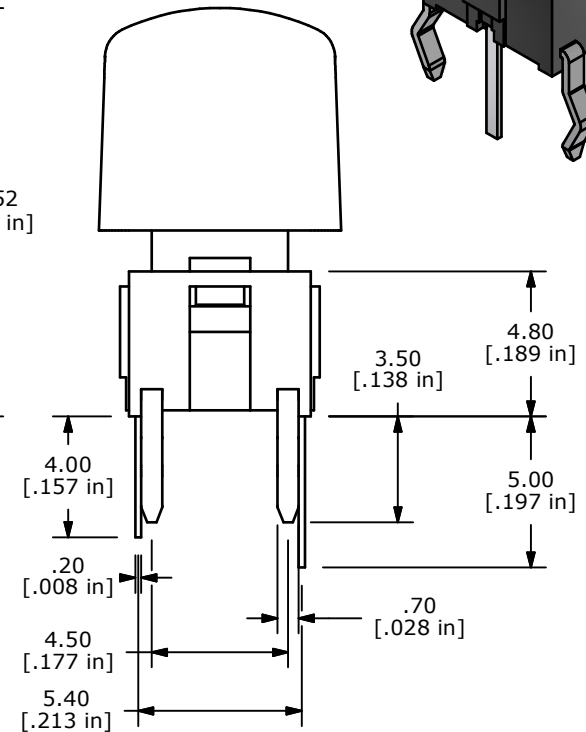

3J CAP, TRANSLUCENT WHITE
▲ P001030

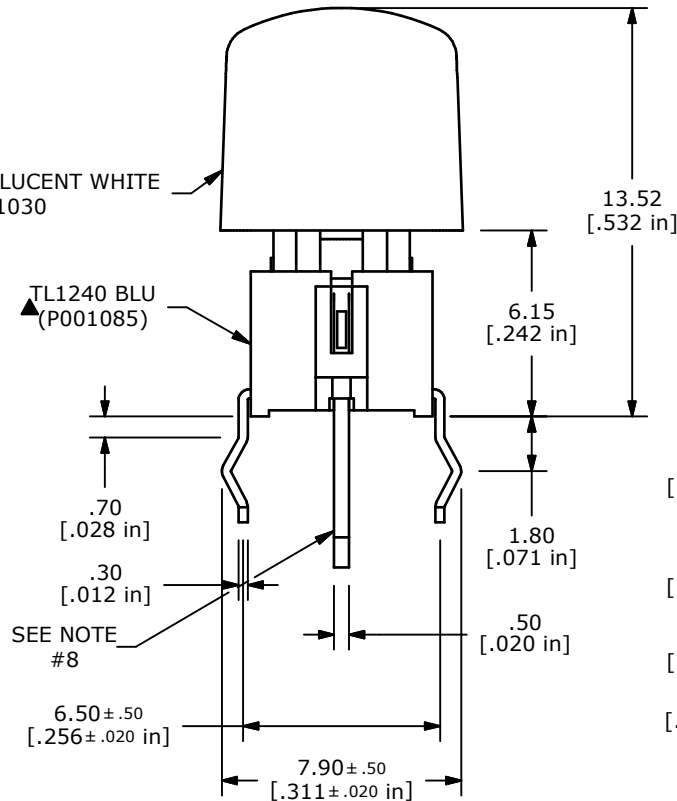

LED SPECS	UNITS	BLUE
FORWARD CURRENT	mA	20
FORWARD VOLTAGE	V	3.2-4.0
LUMINOUS INTENSITY	MCD	500



TITLE TL1240BQ3JTTRAN

A	20985	RELEASED FOR PRODUCTION	1/29/13	EBP
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	DATE 1/29/2013	DR EBP	DWG XP0316P	REV A
-------	-------------------	-----------	----------------	----------