

6

5

4

3

2



1

Rev	AWO #	Description	Date	Appr
-	10145	RELEASED	4/02/10	



APPROVED: _____

DATE: _____ TITLE: _____

D

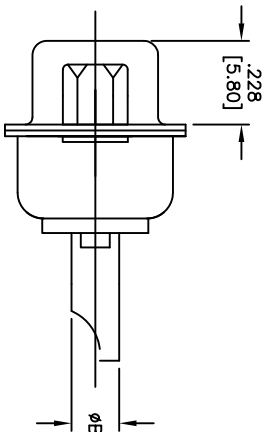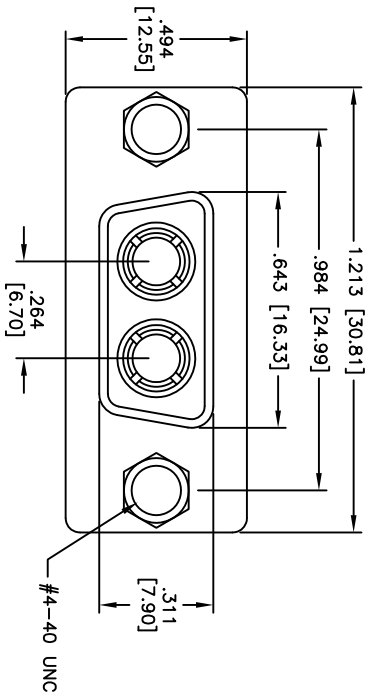

C

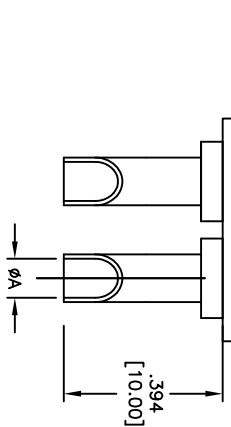

B

SPECIFICATIONS:

Material:

Insulator: PBT, 30% glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Shell: Steel, Tin plated

Hardware: Brass, Nickel plated

Plating:

Gold flash over Nickel underplate overall

Electrical:

Operating voltage: 250 VAC max

Current rating: 10 – 40 Amps max (See Chart)

Contact resistance: 10 mohms max

Insulation resistance: 5,000 Mohms min

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

Operating temperature: –55°C to +150°C

Environmental:

Lead free, RoHS compliant

ADAM TECH PART NO.	CURRENT RATING	WIRE SIZE	DIMENSION	
			A	B
D2W2-SDP-6-JS	40 AMPS	8-10 AWG	Ø.181 [4.60]	Ø.216 [5.50]
D2W2-SDP-5-JS	30 AMPS	10-12 AWG	Ø.146 [3.70]	Ø.181 [4.60]
D2W2-SDP-4-JS	20 AMPS	12-14 AWG	Ø.106 [2.70]	Ø.141 [3.60]
D2W2-SDP-3-JS	10 AMPS	16-18 AWG	Ø.067 [1.70]	Ø.098 [2.50]

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE

D-SUB POWER SOCKET, D2W2, STRAIGHT,
FEMALE, SOLDER CUP, W/ #4-40 JACK SCREWS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES			DRAWN			DATE			
HOLES			DY			4/02/10			
.X	± .10	ØX	± .10	CHECKED					
.XX	± .020	ØXX	± .015	APPROVED					
.XXX	± .015	ØXXX	± .010						
APPROVALS									
TITLE			D-SUB POWER SOCKET, D2W2, STRAIGHT, FEMALE, SOLDER CUP, W/ #4-40 JACK SCREWS						
			SIZE		PART NO.		REV.		
			X		D2W2-SDP-X-JS		-		
REF: S00019T			SCALE: NTS		SHEET 1 OF 1				

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

A

A

6

5

4

3

2

1