

# NTSC/PAL/SECAM Video Decoder with Component Input and Progressive Output Support

## TW9912

### Features

#### Video Decoder

- NTSC (M, 4.43) and PAL (B, D, G, H, I, M, N, N combination), PAL (60), SECAM support with automatic format detection
- Software selectable analog input control
- Built-in analog anti-alias filter
- Fully programmable static gain or automatic gain control for the Y channel
- Programmable white peak control for the Y channel
- 4-H adaptive comb filter Y/C separation
- PAL delay line for color phase error correction
- Image enhancement with peaking and CTI
- Digital sub-carrier PLL for accurate color decoding
- Digital Horizontal PLL for synchronization processing and pixel sampling
- Advanced synchronization processing and sync detection for handling non-standard and weak signal
- Programmable hue, brightness, saturation, contrast, and sharpness
- Automatic color control and color killer
- Chroma IF compensation
- VBI slicer supporting CC and WSS data services
- Programmable output control

#### Analog Video Input

- Triple 10-bit ADCs with independent clamping and gain control
- Supports 480i/480p/576i/576p analog component input with SOG

#### Digital Output

- ITU-R 656 compatible YCbCr(4:2:2) output format
- Progressive ITU-R 656 output format support for both interlaced and progressive inputs

#### Miscellaneous

- Two wire MPU serial bus interface
- Power save and Power down mode
- Low power consumption
- Single 27MHz crystal for all operations
- 3.3V tolerant I/O
- 1.8V/3.3 V power supply
- 48 pin QFN package

# Functional Description

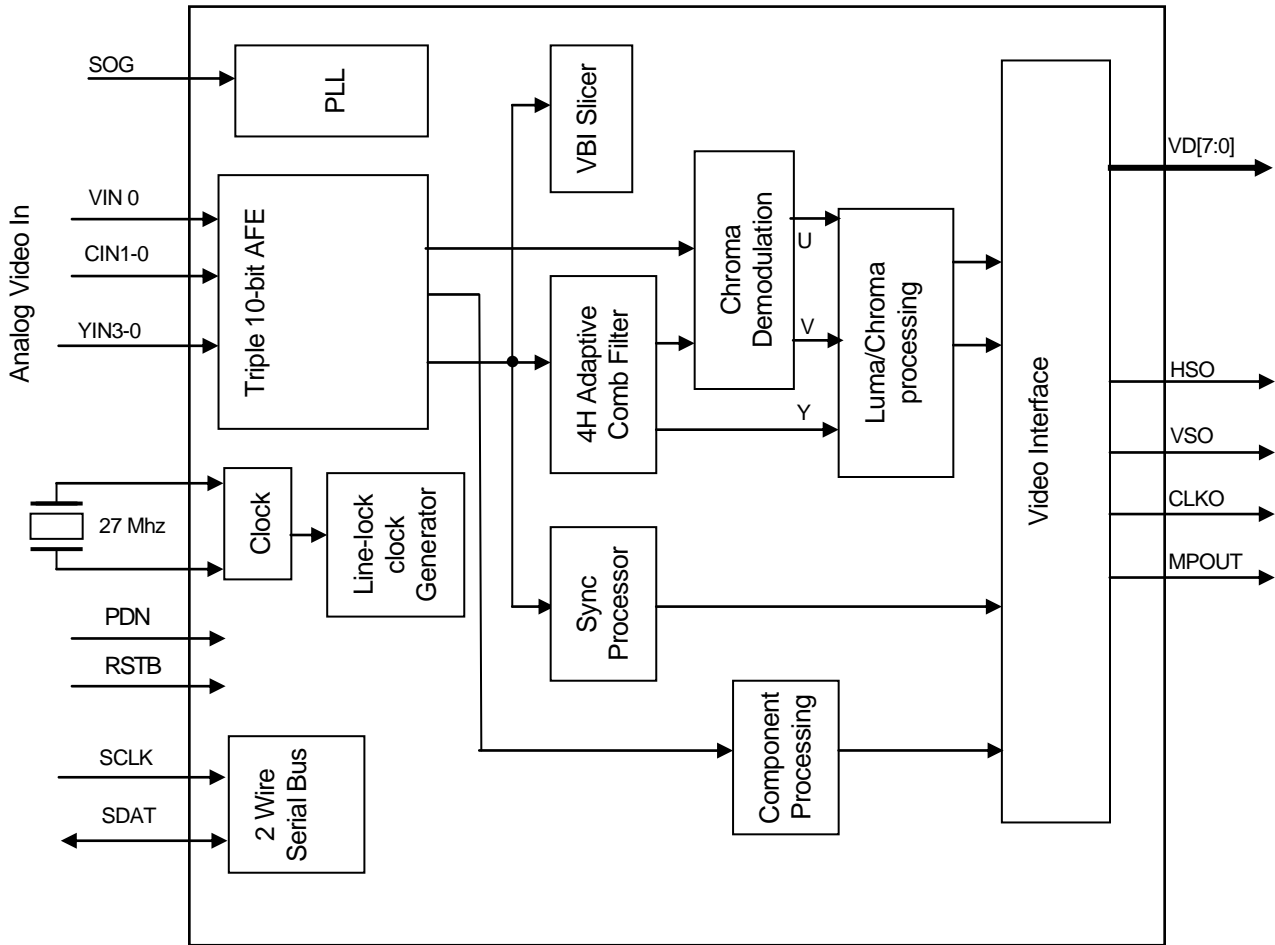


FIGURE 1. TW9912 BLOCK DIAGRAM

# Ordering Information

PART NUMBER	PART MARKING	PACKAGE (Pb-free)	PKG. DWG. #
TW9912-NA3-CR (Note 1)	TW9912 NA3-CR	48 Ld QFN	L48.7X7L

NOTE:

- These Intersil Pb-free plastic packaged products employ special Pb-free material sets, molding compounds/die attach materials, and 100% matte tin plate plus anneal (e3 termination finish, which is RoHS compliant and compatible with both SnPb and Pb-free soldering operations). Intersil Pb-free products are MSL classified at Pb-free peak reflow temperatures that meet or exceed the Pb-free requirements of IPC/JEDEC J STD-020.

For additional products, see [www.intersil.com/product\\_tree](http://www.intersil.com/product_tree)

Intersil products are manufactured, assembled and tested utilizing ISO9000 quality systems as noted in the quality certifications found at [www.intersil.com/design/quality](http://www.intersil.com/design/quality)

---

*Intersil products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design, software and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.*

---

For information regarding Intersil Corporation and its products, see [www.intersil.com](http://www.intersil.com)