
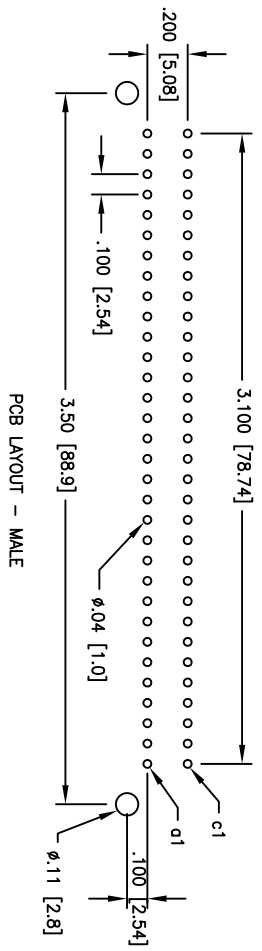


Rev	AWO #	Description	Date	Appr
-	8876	RELEASED	6/25/08	

APPROVED: _____
 DATE: _____ TITLE: _____

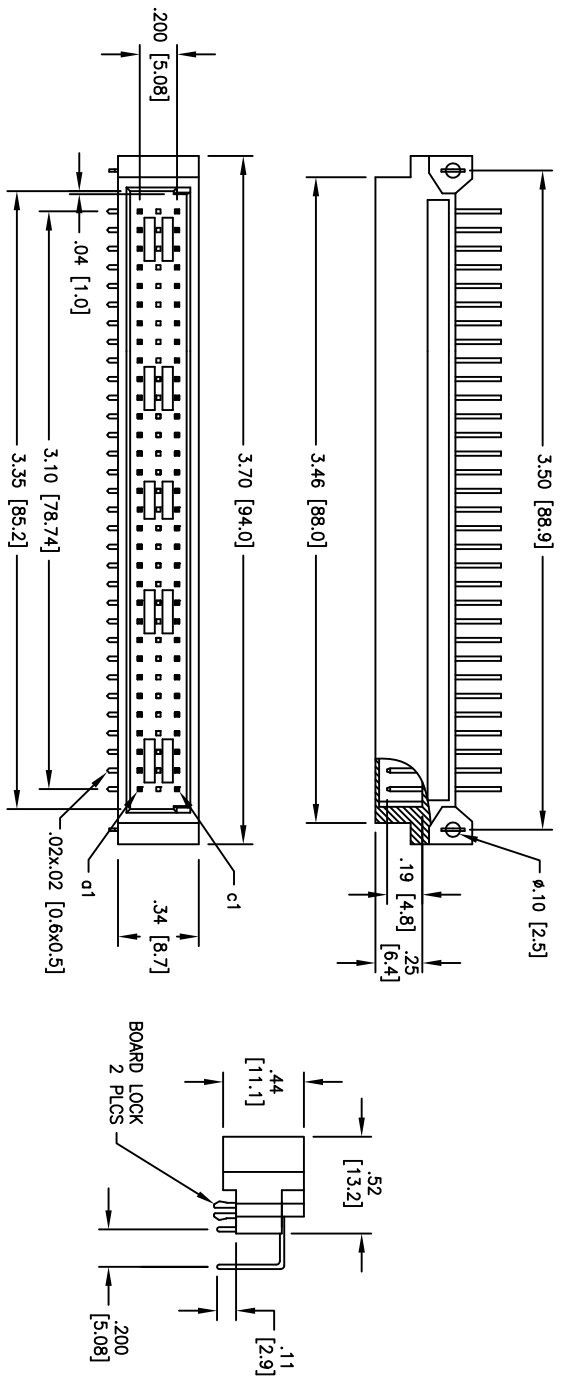

"n"	PLATING
1	30 u" Gold
2	15 u" Gold
3	Gold Flash

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

DIN 41612, 96 POSITION MALE R/A, ROW
 A & C LOADED, 64 PINS, PCB MOUNT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	
DRAWN	SS
CHECKED	
APPROVED	

TITLE	DIN 41612, 96 POSITION MALE R/A, ROW
PART NO.	DIN-64MR-L32-A1CX-BL-HT
SIZE	X
SCALE	NTS
SHEET	1 OF 1

SPECIFICATIONS:
 Material: Insulator: Hi-temp Nylon, rated UL 94V-0
 Insulator color: Beige
 Contacts: Brass
 Plating: X Gold over Nickel on contact area, Tin over Copper underplate on tails
 (See chart for thickness)
 Electrical:
 Current rating: 2 Amps max
 Contact resistance: 30 mohms max
 Insulation resistance: 1000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -55°C to +105°C
 Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 260°C for 5 sec.

