

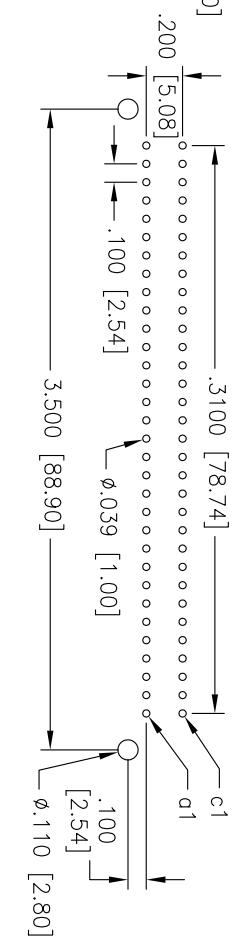
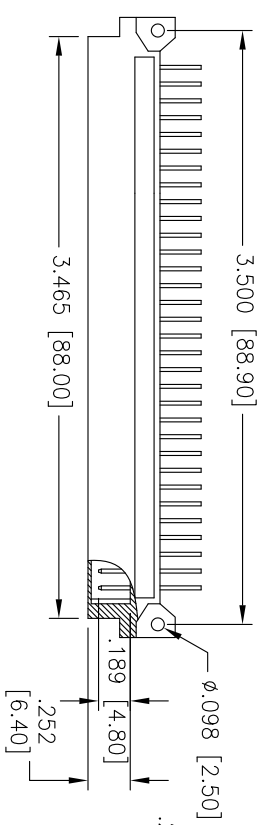


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/06/08	

APPROVED: _____
 DATE: _____ TITLE: _____

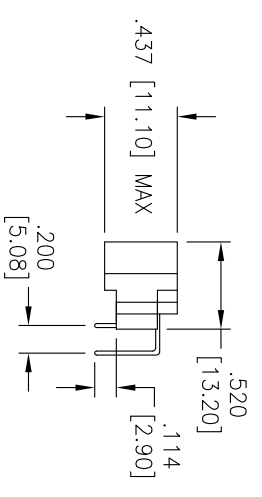

Recommended PCB Layout

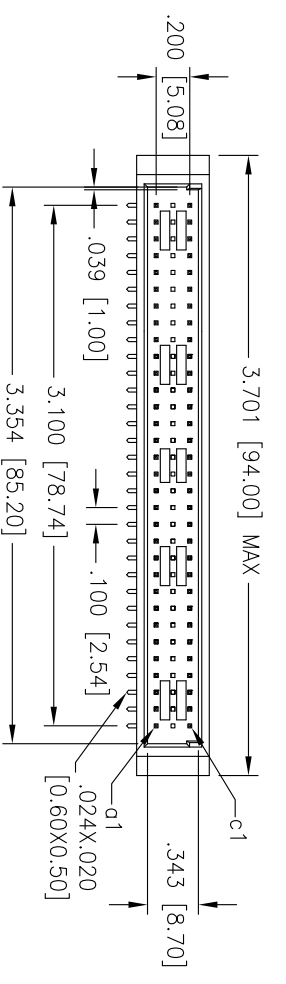

"X"	PLATING	CLASS
1	30 u" Gold	1
2	15 u" Gold	2
3	Gold Flash	3

Material: Nylon 6T, rated UL 94V-0
Insulator: Nylon 6T, rated UL 94V-0
Contacts: Brass
Plating:
 X Gold over Nickel underplate on contact area,
 Tin over Copper underplate on solder tails.
 (See chart for thickness)

Electrical:
 Operating voltage: 500 VAC max
 Current rating: 2 Amps max
 Contact resistance: 30 mohms max
 Insulation resistance: 1000 Mohms min @ DC 500V
 Dielectric withstanding voltage: 1000 VAC for 1 minute
Temperature Rating:
 Operating temperature: -55°C to +105°C

Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 sec.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DIN TYPE C MALE, 64 PINS LOADED
 3 ROW RIGHT ANGLE, ROWS A & C LOADED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.XX ± .10	ØXX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN DY	10/6/08
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	DIN-64MR-132-A1CX-HT	-
SCALE:	NTS	SHEET 1 OF 1