
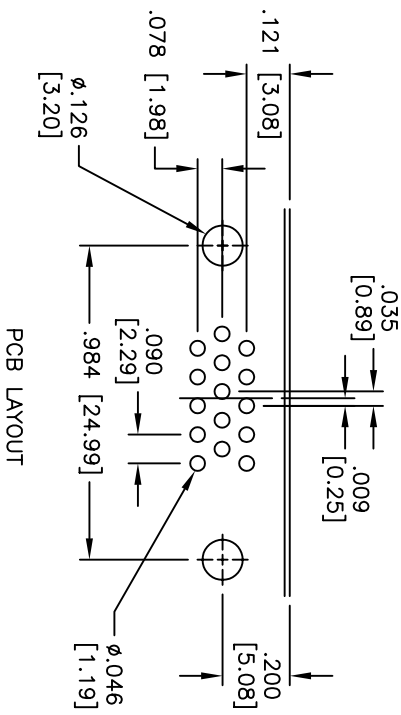
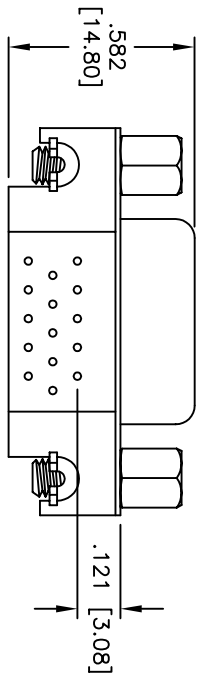
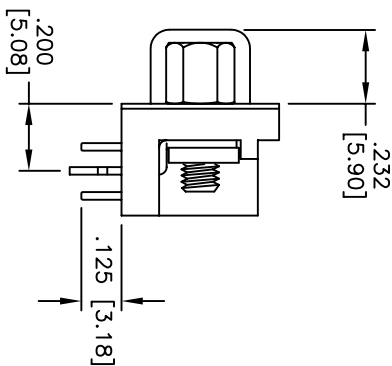


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/30/05	

APPROVED: _____
 DATE: _____ TITLE: _____

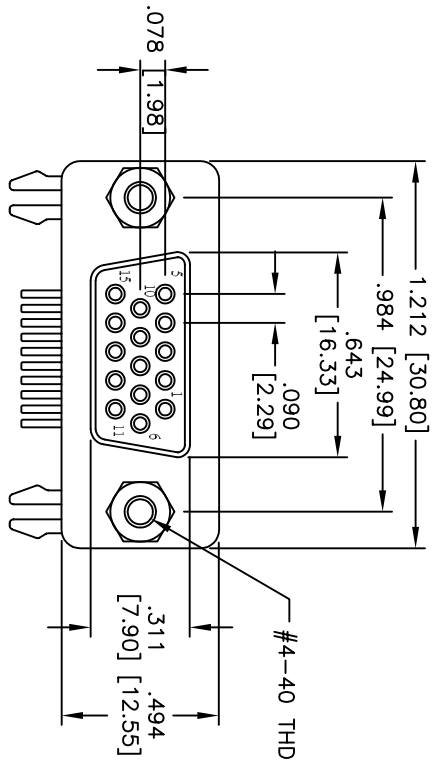

PCB LAYOUT

SPECIFICATIONS:

Material:
 Insulator: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Black
Contacts: Brass
 Shell: Steel, Nickel plated
 Hardware: Brass, Nickel plated
 Plating:
 Gold flash over Nickel underplate on contact area, Tin over Copper underplate and tails
Electrical:
 Operating voltage: 250 VAC max
 Contact rating: 5 Amps max
 Contact resistance: 20 mohms max
 Insulation resistance: 5,000 Mohms min
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
 Operating temperature: -65°C to +125°C
Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 230°C for 5 seconds



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	
.X	± .10
.XX	± .020
.XXX	± .015
.XXX	± .015
APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

ADAM TECH	
909 Railway Avenue, Union, NJ 07083	
Phone: 908-687-5000 Fax: 908-687-5710	
TITLE: .197 [5.00] SLIMLINE D-SUB SOCKET	
FORKED BOARDLOCKS, #4-40 JACKSCREWS	
SIZE	PART NO.
X	HD15-SN-25
SCALE: NTS	SHEET 1 OF 1