

HIGH CURRENT SWITCHING APPLICATION.

APPLICATION



Relay drivers, high-speed inverters, converters, and other general high-current switching applications.

FEATURES

- Low Collector Emitter Saturation Voltage.
: $V_{CE(sat)} = -0.4V(\text{Max.}) (I_C = -4A)$
- High Current and High f_T
: $I_C = -8A, f_T = 130\text{MHz.}$
- Excellent Linearity of h_{FE}
- High Speed Switching Time.
: $f_T = 20\text{nS (Typ.)}$
- Complementary to KTC1804D/L

MAXIMUM RATING ($T_a = 25^\circ\text{C}$)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Base Voltage		V_{CBO}	-60	V
Collector-Emitter Voltage		V_{CEO}	-60	V
Emitter-Base Voltage		V_{EBO}	-6	V
Collector Current	DC	I_C	-8	A
	Pulse	I_{CP}	-12	
Collector Power Dissipation	$T_a = 25^\circ\text{C}$	P_C	1.3	W
	$T_a = 25^\circ\text{C}$		20	
Junction Temperature		T_j	150	$^\circ\text{C}$
Storage Temperature Range		T_{stg}	-55 ~ 150	$^\circ\text{C}$

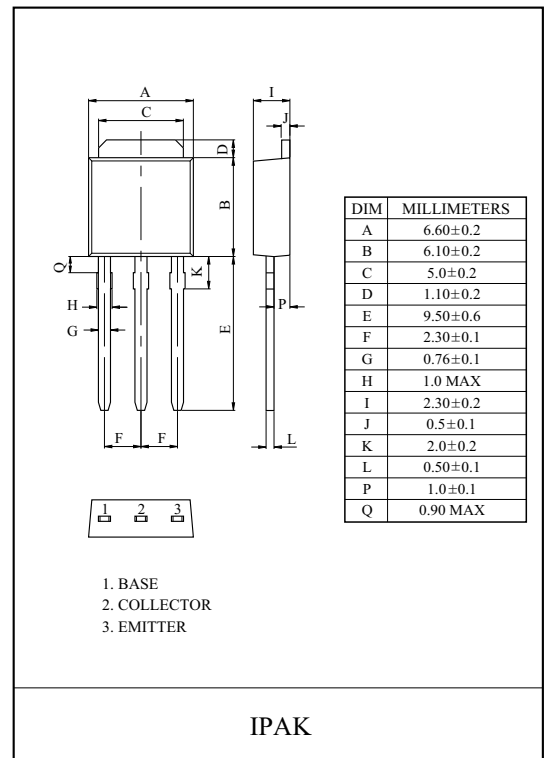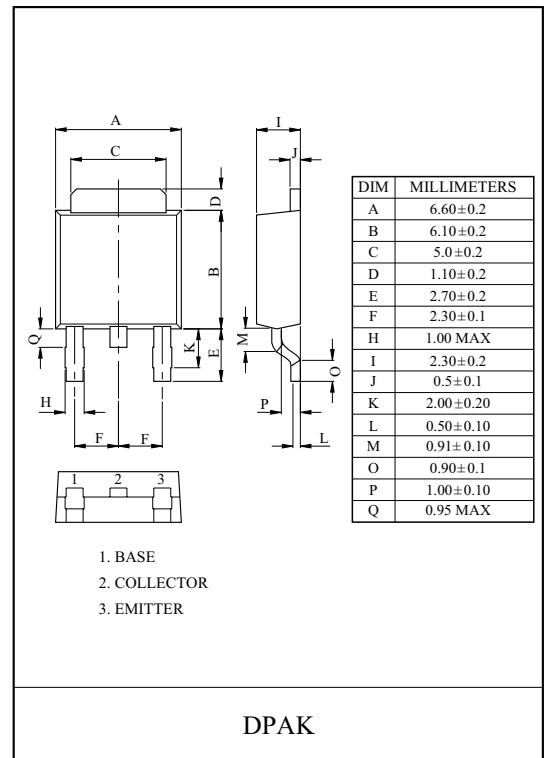







KTA1204D/L

ELECTRICAL CHARACTERISTICS (Ta=25 °C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current		I_{CBO}	$V_{CB}=-40V, I_E=0$	-	-	-1	μA
Emitter Cut-off Current		I_{EBO}	$V_{EB}=-4V, I_C=0$	-	-	-1	μA
DC Current Gain		$h_{FE}(1)$ (Note)	$V_{CE}=-2V, I_C=-0.5A$	100	-	400	
		$h_{FE}(2)$	$V_{CE}=-2V, I_C=-6A$	35	-	-	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$	$I_C=-4A, I_B=-0.2A$	-	-250	-500	mV
Base-Emitter Saturation Voltage		$V_{BE(sat)}$	$I_C=-4A, I_B=-0.2A$	-	-0.95	-1.3	mV
Collector-Base Breakdown Voltage		$V_{(BR)CBO}$	$I_C=-10\mu A, I_E=0$	-60			V
Collector-Emitter Breakdown Voltage		$V_{(BR)CEO}$	$I_C=-1mA, R_{BE}=\infty$	-50			V
Emitter-base Breakdown Voltage		$V_{(BR)EBO}$	$I_E=-10\mu A, I_C=0$	-6	-	-	V
Gain-Bandwidth Product		f_T	$V_{CE}=-5V, I_C=-1A$	-	130	-	MHz
Collector Output Capacitance		C_{ob}	$V_{CB}=-10V, I_E=0, f=1MHz$	-	95	-	pF
Switching Time	Turn On Time	t_{on}	<p style="text-align: center;"> $-I_{B1} = I_{B2} = 0.4A$ DUTY CYCLE $\leq 1\%$ </p>	-	50	-	nS
	Storage Time	t_{stg}		-	450	-	
	Fall Time	t_f		-	20	-	

Note : h_{FE} Classification O:100~200, Y:140~280, GR:200~400.

KTA1204D/L

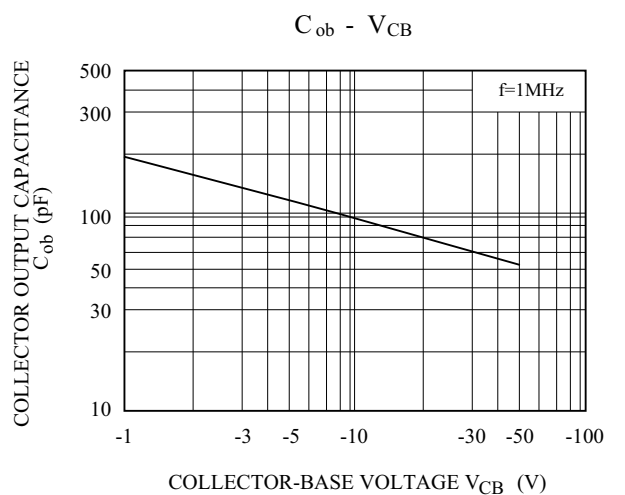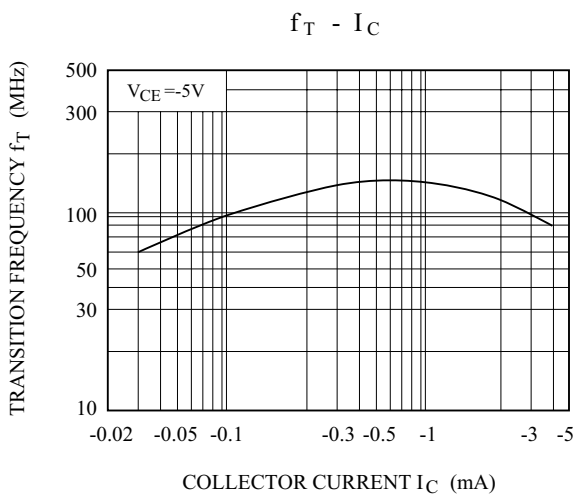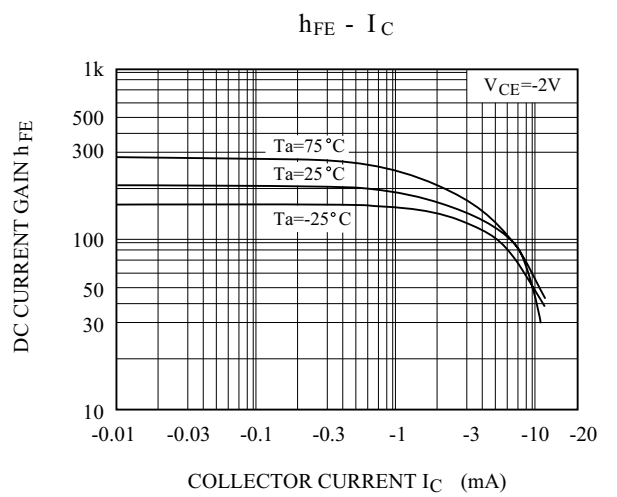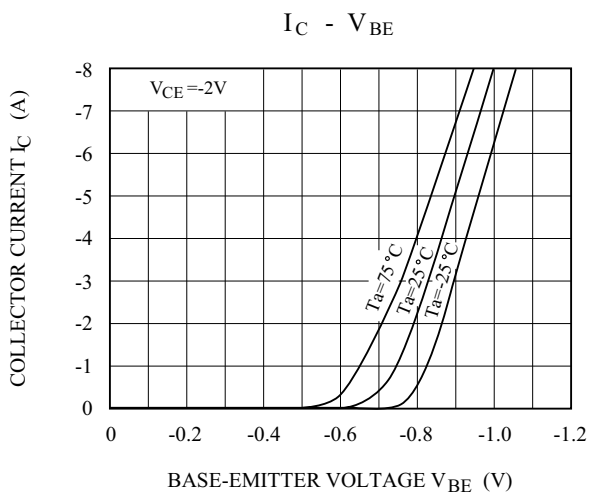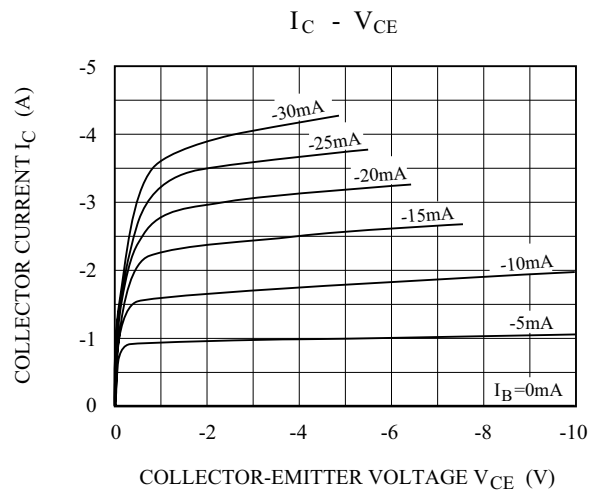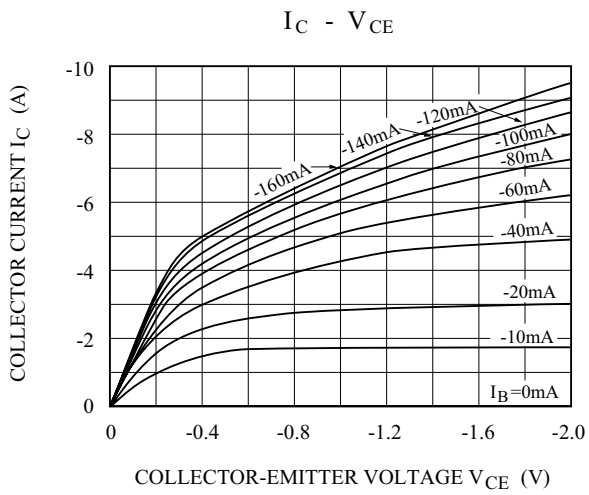

KTA1204D/L

