



TA-I Technology Inc.

**Approval Specification Sheet
for TAI023A**

Document No

TAI023A

Issued date

2012/07/12

page

1 /6

LED Chip on Board
Approval Specification Sheet for TAI023A

TA-I Technology Part Number: LCB05APTAI023A

Customer Approval:

Valid Date	Release Date	Version
Jul 12, 2012	Jul 12, 2012	TAI023A
Approved by	Checked by	Produced by

N0.26, LANE 470, NAN-SHAN Rd., SEC.2, LU-CHU HSIANG, TAOYUAN, TAIWAN, R. O. C.
TEL : 886-3-3246169 FAX : 886-3-3246167

TA-I TECHNOLOGY CO., LTD



TA-I Technology Inc.

Approval Specification Sheet for TAI023A

Document No

TAI023A

Issued date

2012/07/12

page

2 / 6

1. Specification :


1.1 Substrate Dimension as shown in Table 1.

Table 1: The spec of Panel and Single Unit

	Item	Spec
Single Unit	Length	112±0.1
	Width	112±0.1
	Thickness of substrate	0.635±0.06
	The total thickness	1.245±0.22

Unit: mm

1.2 Specification of Panel:

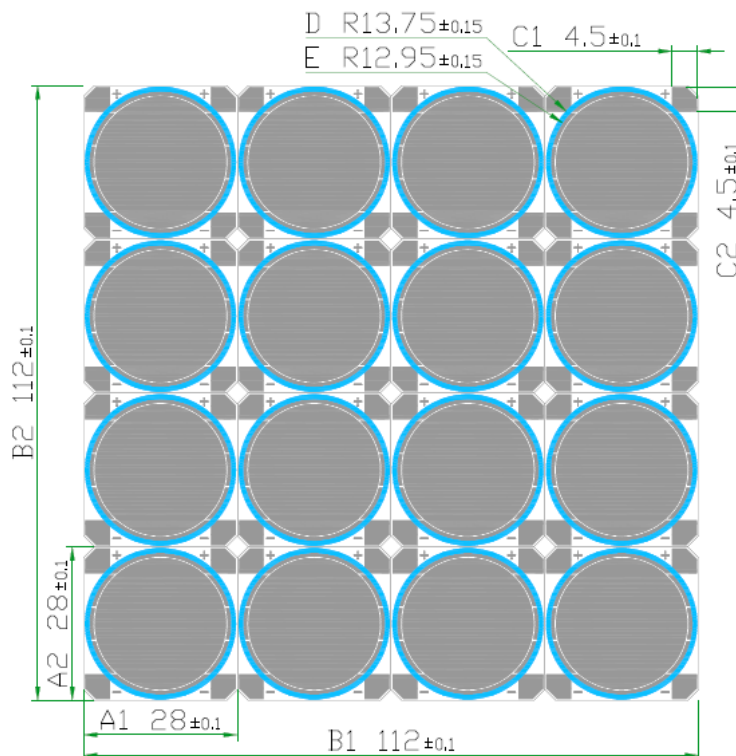

Unit: mm



TA-I Technology Inc.

Approval Specification Sheet for TAI023A

Document No

TAI023A

Issued date

2012/07/12

page

3 /6



2. Criteria of Visual Inspection:

2.1 Visual inspection

2.2 Test items are shown as below table.

2.3 Tool: CCD OM 15X

2.4 Definition of test areas:

No.	Item	Examine area	Specification	Schematic diagram
1	a)Depression b)Silver Point c)Protrusion d)Foreign Materials e)Contaminants	Single unit of front side	NG if ≥ 2 mm	
2	Pattern Inspection	Pattern of front side	The finish pattern shall per original drawing (above 95%).	



TA-I Technology Inc.

Approval Specification Sheet for TAI023A

Document No

TAI023A

Issued date

2012/07/12

page

4 /6

3. Coating thickness test specification:

3.1 Using tools : Conductive paste thickness : 3 axis microscope
Cavity thickness : 3 axis microscope

3.2 Measurement position:


Conductive paste thickness : Position 1

Cavity thickness : Position 2

3.3 Inspect spec: (Three times average of measurement)

Conductive paste thickness : >10um

Cavity thickness : 600 ± 150 um

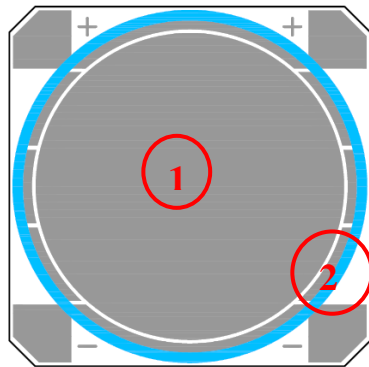



TA-I Technology Inc.

Approval Specification Sheet for TAI023A

Document No

TAI023A

Issued date

2012/07/12

page

5 /6

4. Reliability test

No.	Item	Parameter	Specification
1	Solderability	1. Temp. : $235 \pm 5^{\circ}\text{C}$ 2. Time : $5 \pm 1\text{sec}$ 3. solder bath composition : (Ag/Sn/Cu=3/96.5/ 0.5%)	● Coverage > 90%
2	Adhesion test	1. Temp. : RT 2. Tool : 3M-600 3. Time : adhesive 30 seconds 4. Angle : 180°	● The exterior must be no separate
3	Reflow	1. Temp. : 260°C 2. Times : 3 cycles	● No yellowing.

 TA-I Technology Inc.	Approval Specification Sheet for TAI023A	Document No	TAI023A
		Issued date	2012/07/12
		page	6 /6

5. Notices

(1)When inspection, packaging and handling:

Must wear gloves and masks when inspect products.

Must wear latex gloves before unpacking products

Must avoid vibration, shock and stress etc. when carry products.

(2) Storage conditions:

Store under $25^{\circ}\text{C} \pm 5^{\circ}\text{C}$ 、 $50\% \pm 10\text{RH}$ when sealed.

The expiration date is less than 3 months when sealed.

Store under $25^{\circ}\text{C} \pm 5^{\circ}\text{C}$ 、 $50\% \pm 10\text{RH}$ when unsealed.

Please store unsealed package in airtight containers and used up within 3 days.

(3) Package

