
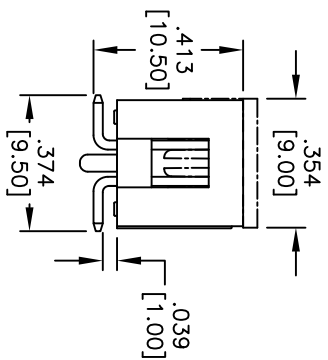
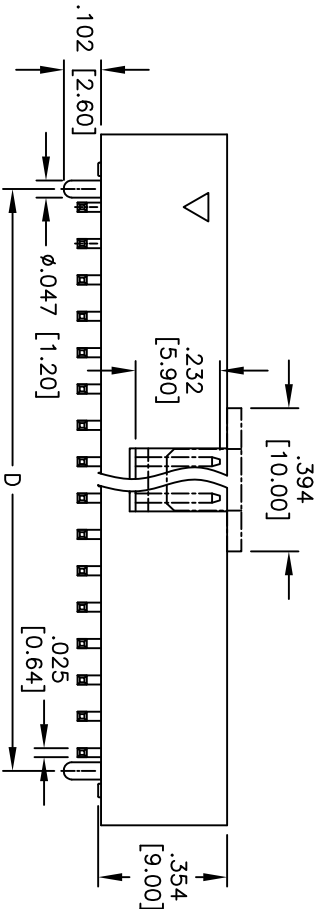
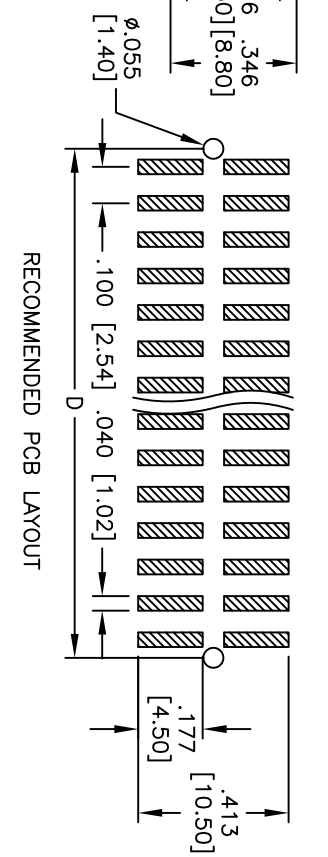


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/24/09	

APPROVED: _____
 DATE: _____ TITLE: _____

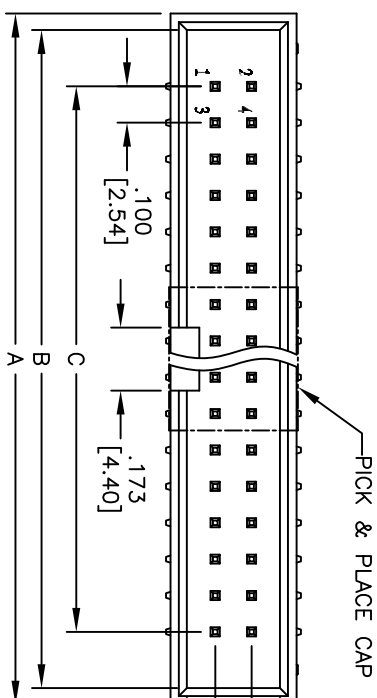

PACKAGED ON TAPE & REEL

Positions: 10 thru 64
 A = .100 [2.54] X No. of Positions per row + .300 [7.62]
 B = .100 [2.54] X No. of Positions per row + .209 [5.32]
 C = .100 [2.54] X No. of Spaces
 D = .100 [2.54] X No. of Positions per row

SPECIFICATIONS:
 Material: Nylon 6T, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating: 10u" Gold over Nickel underplate overall.
 Electrical:
 Current rating: 3 Amps max
 Contact resistance: 20 mohms max
 Insulation resistance: 1000 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS Compliant
 Recommended soldering temp: 260°C for 5 seconds

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: BOX HEADER, VERTICAL, SMT TYPE
 10u" GOLD PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED INCHES		HOLDS		DATE	
.X	± .10	ØXX	± .10		
.XX	± .020	ØXXX	± .015		
.XXX	± .015	ØXXXX	± .010		
APPROVALS		DATE		DATE	
DRAWN	DY	11/24/09			
CHECKED					
APPROVED					
SIZE	PART NO.	TITLE			
X	BHR-XX-VUA-SMT-10-P-PP-TR	BOX HEADER, VERTICAL, SMT TYPE			
REF: S00019C	SCALE: NTS	SHEET 1 OF 1			