
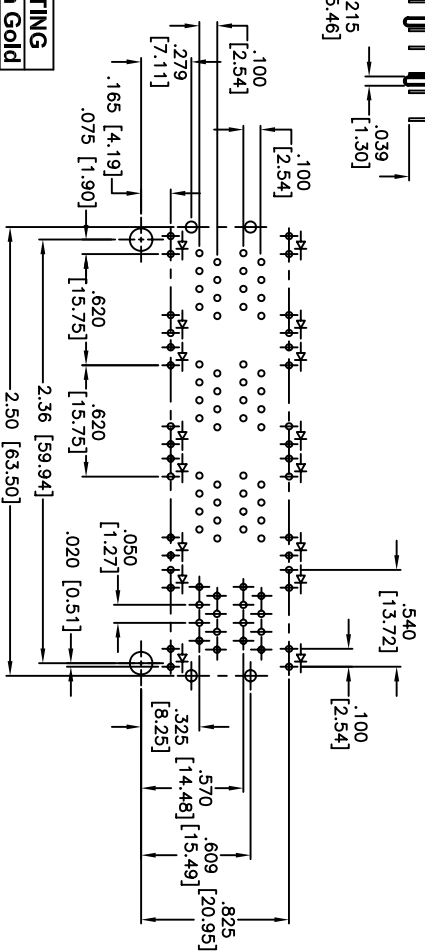
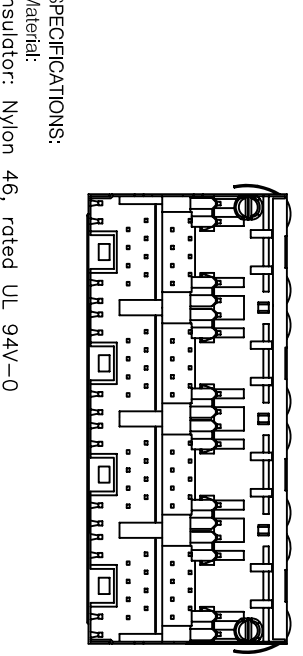
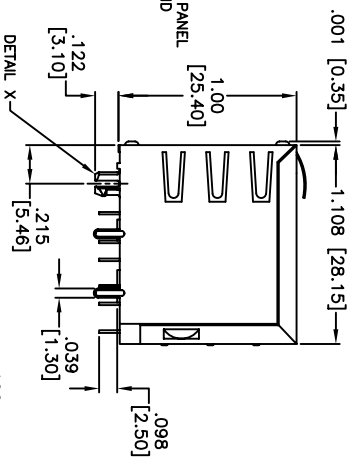
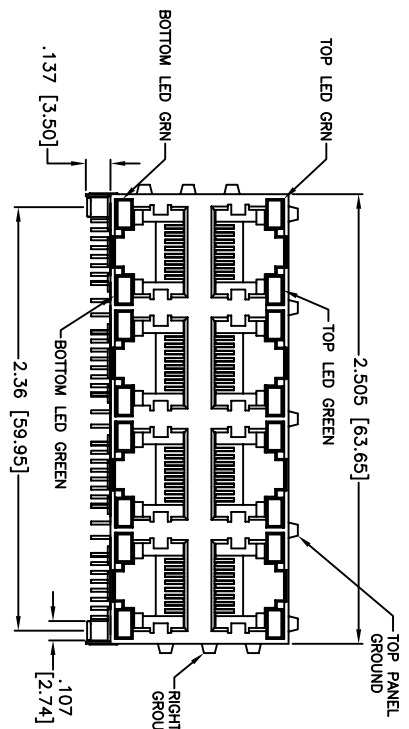



Rev	AWO #	Description	Date	Appr
-	7731	RELEASED	4/18/07	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

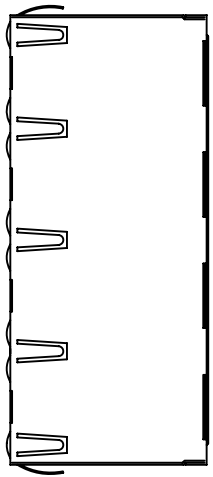

"X"	PLATING
0	15 uin Gold
1	30 uin Gold
2	50 uin Gold

RECOMMENDED P.C.B. LAYOUT

**SPECIFICATIONS:**

Material:

Insulator: Nylon 46, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Shield: Copper Alloy, Tin plated

Plating:

X plating over Nickel underplate on contact area, Tin over Copper underplate on solder tails

Electrical:

Operating voltage: 150 VAC max

Current rating: 1.5 Amps max

Insulation resistance: 500 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +125°C

Environmental:

Lead free, RoHS Compliant

Recommended soldering temp: 235°C for 5 seconds



**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

MODULAR JACK GANGED, 8 PORT, 8P8C  
 LED GREEN / GREEN

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED		DRAWN		DATE	
INCHES		BW		4/18/07	
HOLDERS		CHECKED		APPROVALS	
.X ± .10		X		DATE	
.XX ± .020		X		DATE	
.XXX ± .015		X		DATE	
.XXX ± .010		X		DATE	
APPROVALS		SIZE		PART NO.	
APPROVED		X		MTJG-8-88JX1-FSG-PG-LD	
APPROVED		REF:		SCALE: NTS	
APPROVED		REF:		SHEET 1 OF 1	