


Rev	AWO #	Description	Date	Appr
-		RELEASED	2/01/10	

APPROVED: _____
 DATE: _____ TITLE: _____

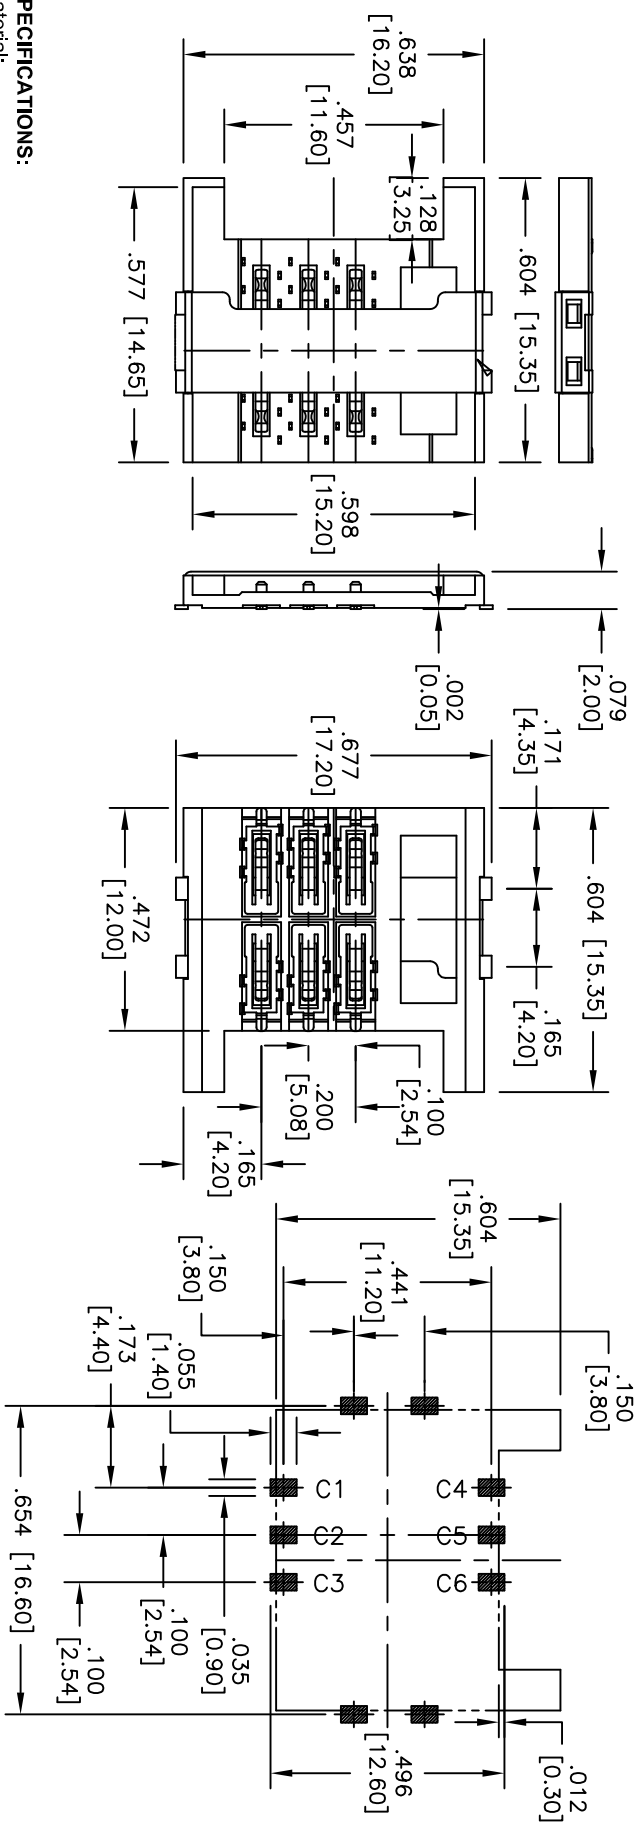

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

- Material: Insulator: LCP, rated UL 94V-0
- Insulator color: Black
- Contacts: Phosphor Bronze, Nickel plated
- Lock: Stainless, Tin plated
- Plating: Gold flash over Nickel underplate on contact area, Tin over Copper underplate on SMT tails.
- Electrical: Voltage rating: 15 VAC/DC max
 Current rating: 1.0 Amps max
 Contact resistance: 100 mohms max.
 Insulation resistance: 1000 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute
- Temperature Rating: Operating temperature: -25°C to +85°C
- Environmental: Lead free, RoHS compliant.
- Recommended soldering temp: 260°C for 5 sec.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: SIM CARD CONNECTOR, 6 POSITION
 .079" [2.00mm] HIGH, SURFACE MOUNT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES EXCEPT AS NOTED	
INCHES		HOLDS	
.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010
APPROVALS		DATE	
DRAWN	DY	2/01/10	
CHECKED			
APPROVED			
REF: S00041C	SCALE: NTS	SHEET 1 OF 1	REV.