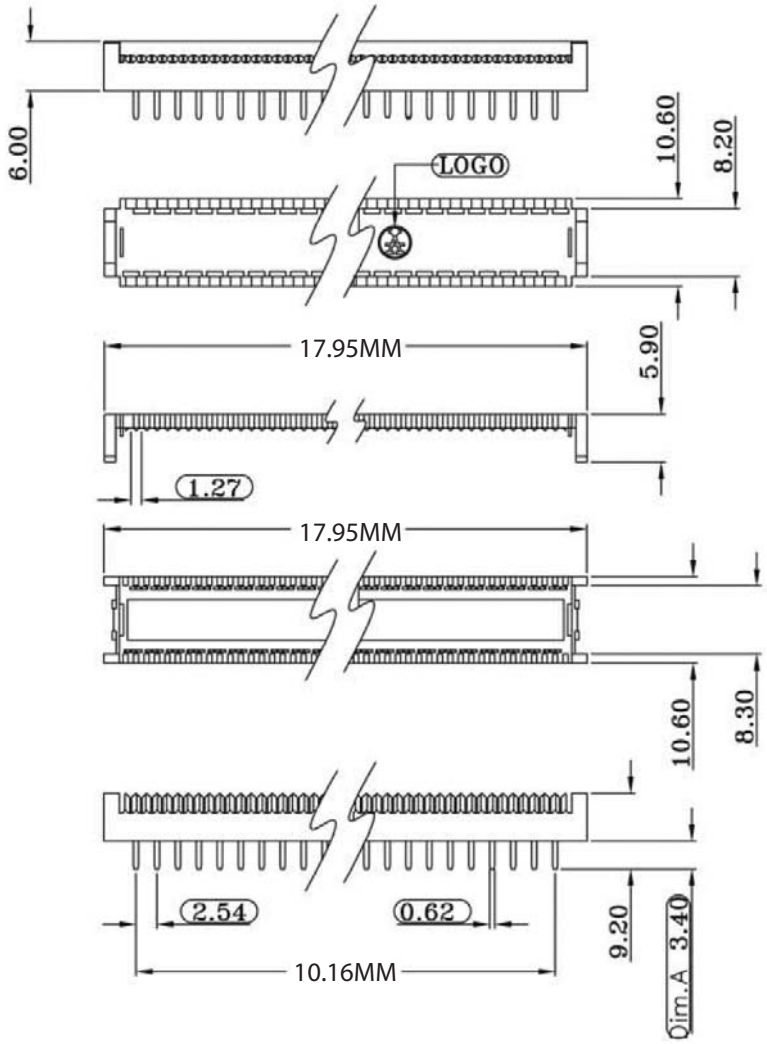

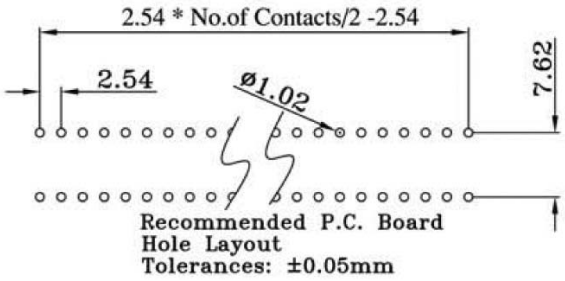







Materials:

- Insulator: P.B.T. 30%Glass Fiber, UL94V-0
- Contacts: Brass, Gold Flash over Nickel
- Contact Plating: Flash Gold Selective, 10μ" or 30μ" of Gold

Electrical:

- Current Rating: 1AMP
- Insulation Resistance: 1,000MΩ Min.
- Dielectric Withstanding: 500V AC
- Operating Temperature: -55°C ~ +105°C



RoHS Complaint

Scale	1:1						Name	Item No. ADIP10-G-LC-R
TOLERANCE					Drawn	10.28.11	Chappell	
X.X	±0.40				Approved			Title DIP Connector, 2.54 x 7.62MM, 10 Contacts, Gold Plated
X.XX	±0.25							
X.XXX	±0.15							Drawing No. rev00
Angle	±3°							
			Modification	Date	Name			Replace / Sheet

ASSMANN WSW components