

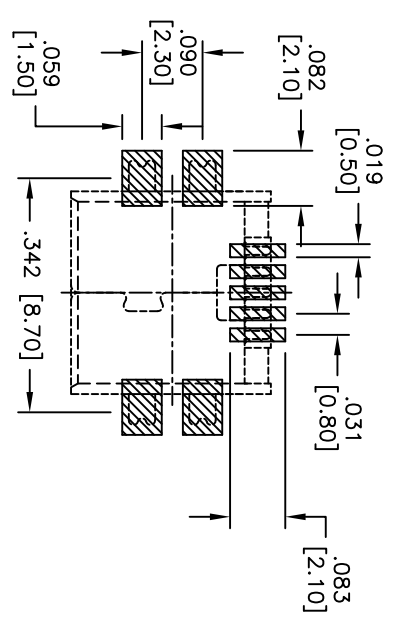
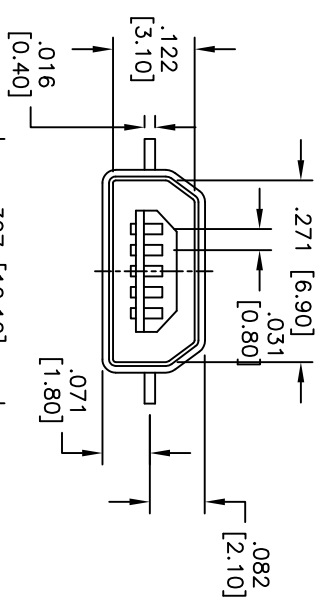
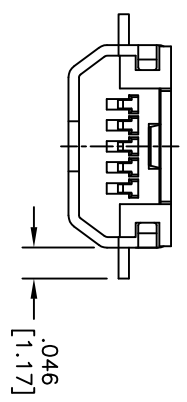



Rev	AWO #	Description	Date	Appr
-		RELEASED	6/04/10	

APPROVED: _____
 DATE: _____ TITLE: _____



RECOMMENDED
PCB LAYOUT

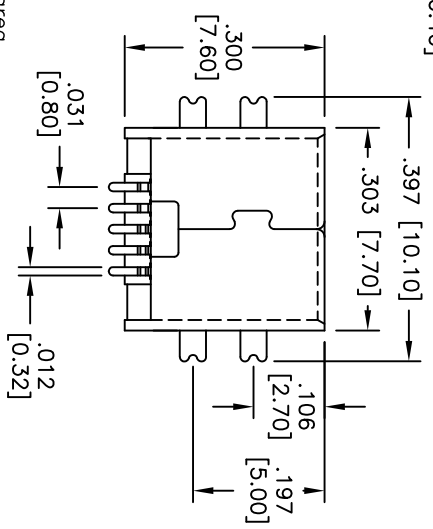

PACKAGED ON TAPE & REEL

SPECIFICATIONS:

Material:
 Insulator: LCP, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze,
 Plating: Gold Flash over Nickel plate on contact area,
 Tin on solder tail.
 Shield: Brass, Nickel Plated

Electrical:
 Operating Voltage: 5V AC
 Current Rating: 1 Amp
 Contact resistance: 30 mohms max
 Insulation resistance: 100 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 100 VAC for 1 minute

Environmental:
 Operating temperature: -55°C to +105°C
 Lead free, RoHS compliant.
 Recommended soldering temp: 260°C for 5 sec.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE
 MINI USB, AB TYPE, 5 PIN, SMT
 MID BOARD MOUNT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED INCHES	
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN DY	6/04/10
CHECKED	
APPROVED	

SIZE X	PART NO. MUSB-AB-S-RA-TSMT-T/R	REV. -
REF:	SCALE: NTS	SHEET 1 OF 1