
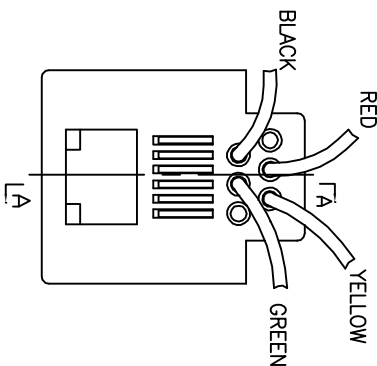
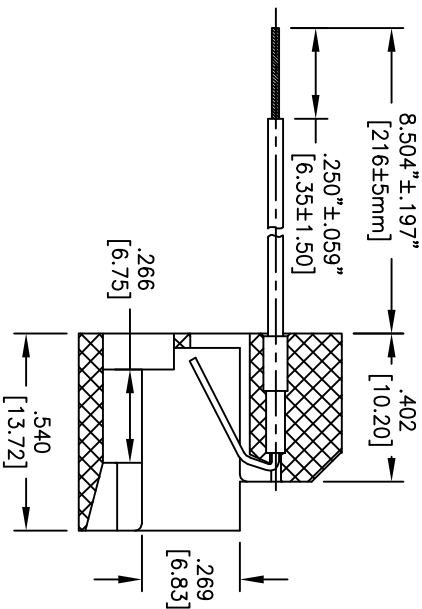
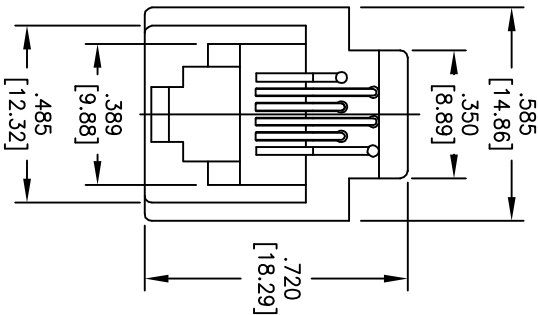


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/25/10	

APPROVED: _____

DATE: _____ TITLE: _____

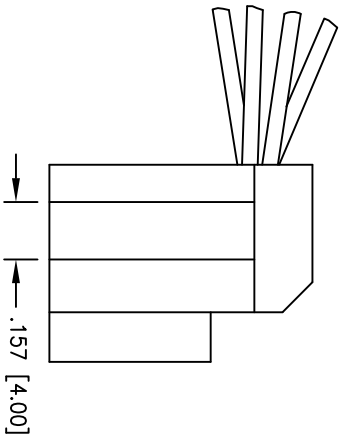

SPECIFICATIONS:

Material:

Insulator: ABS, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Wires: 26 Awg, UL 1061, 80°C, VW-1, 300V

Plating:

Gold over Nickel underplate on contact area.

(See chart for thickness)

Electrical:

Operating voltage: 150 VAC max

Current rating: 1.5 Amps max

Contact resistance: 20 mohms

Insulation resistance: 1000 Mohms min

Dielectric withstanding voltage: 1000 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +125°C

Environmental:

Lead free, RoHS compliant.

"X"	PLATING
0	15 μ" Gold
1	30 μ" Gold
2	50 μ" Gold



ADAM TECH

909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

WIRE LEADED JACK, 623 K4, BLACK
8.5" LEADS, STRIPPED AND TINNED .250"

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLS				TITLE			
.X ± .10	Ø.X ± .10	Ø.X ± .10	Ø.X ± .10	SIZE	PART NO.	REV.	
.XX ± .020	Ø.XX ± .015	Ø.XX ± .015	Ø.XX ± .010	X	MTJP-623-K4-X-B1-1	-	
.XXX ± .015	Ø.XXX ± .010	Ø.XXX ± .010	Ø.XXX ± .010	REF.	S00009C	SCALE: NTS	SHEET 1 OF 1
DRAWN	DY	5/25/10					
CHECKED							
APPROVED							