



Rev	AWO #	Description	Date	Appr
-		RELEASED	9/10/07	

APPROVED: _____

DATE: _____ TITLE: _____

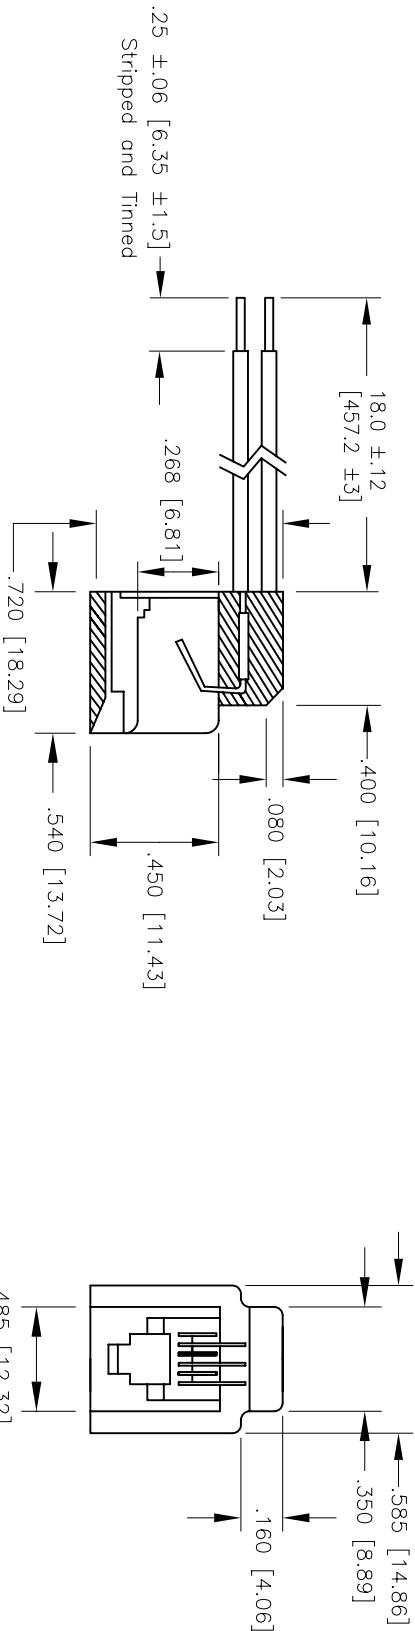

"X"	PLATING
0	15 μ" Gold
1	30 μ" Gold
2	50 μ" Gold



SPECIFICATIONS:

Material:

Insulator: ABS, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Wires: 26 Awg, UL 1061, 80°C, VW-1, 300V

Plating:

Gold over Nickel underplate on contact area.

(See chart for thickness)

Electrical:

Operating voltage: 150 VAC max

Current rating: 1.5 Amps max

Contact resistance: 20 mohms

Insulation resistance: 1000 Mohms min

Dielectric withstanding voltage: 1000 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +125°C

Environmental:

Lead free, RoHS compliant.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE

WIRE LEADED JACK, 623 K4, BLACK

18" LEADS, STRIPPED AND TINNED .250"

SIZE

X

PART NO.

MTJP-623-K4-X-C5-1

REV.

-

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED			
INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010
APPROVALS		DATE	
DRAWN	SS	9/10/07	
CHECKED			
APPROVED			
REF:		SCALE:	NTS
		SHEET	1 OF 1