


CIRCUIT: SPDT
CONTACT CONFIGURATION




SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
DN	ND/NE	DN
2-3	OPEN	2-1

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4(VA) Max. @20V (AC or DC)
5. FIXED TERM. & MOVING CONTACT:
COPPER ALLOY W/GOLD plate over
Nickel plate.
6. ELECTRICAL LIFE: 50,000 make-and-break cycles
at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1,000V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C.
10. ▲ DESIGNATE MAJOR FEATURE.
11. 2002/95/EC (ROHS) COMPLIANT

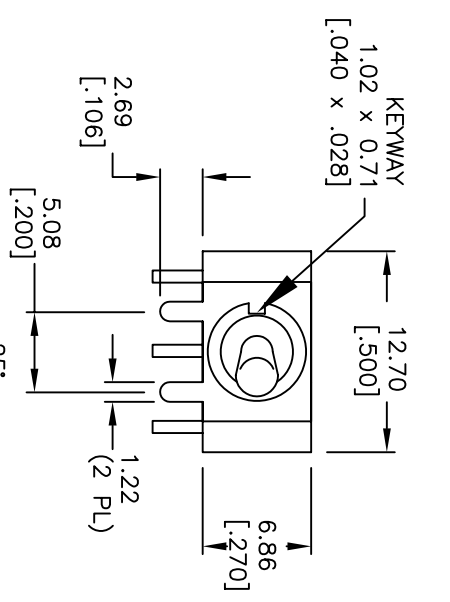

RECOMMENDED P.C.B. LAYOUT

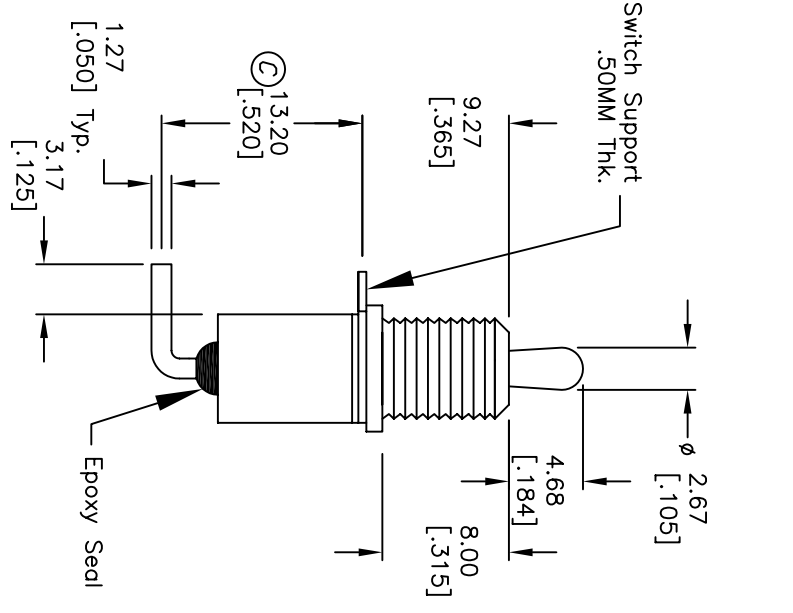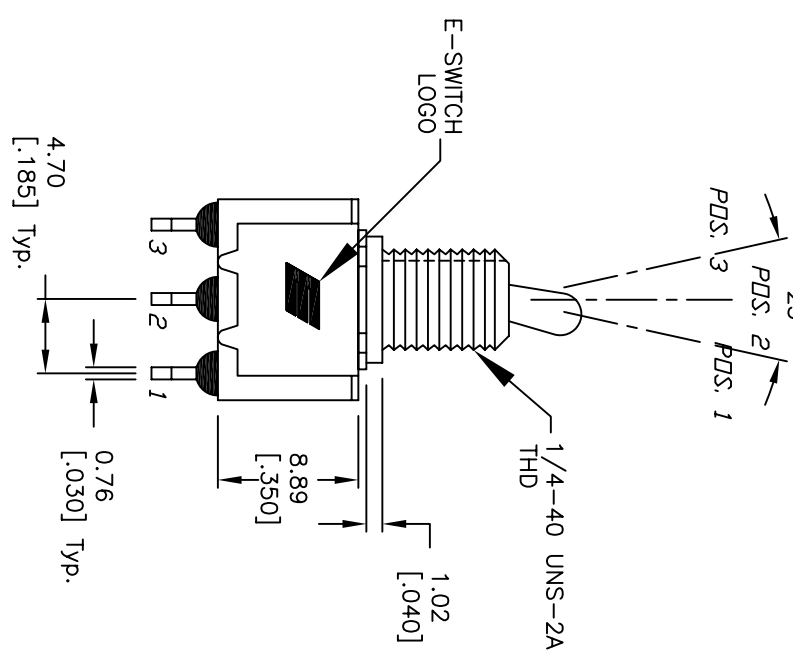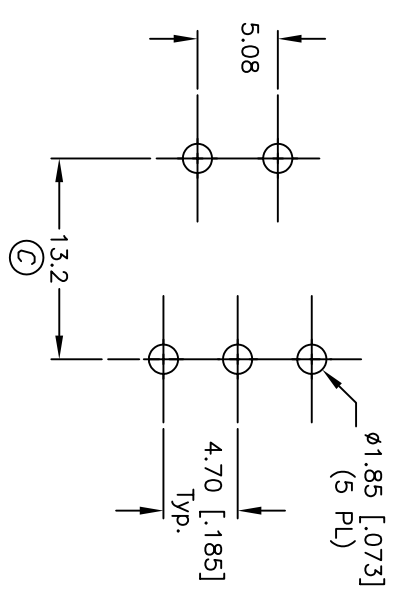

REV.	ECN NO.	DESCRIPTION	DATE	CHKD
C	15526	DIMS FROM 12.70	11/11/05	PH
B	15497	ADD RDS NOTE	11/2/05	PH
A	12703	RELEASED	1/08/03	CJB

TITLE		SCALE	DATE	DR	DWG	REV
100 SP-1 T2 B6 M6 R E (GOLD CONTACTS)		2:1	1/8/03	CJB	T110066	C



THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED