

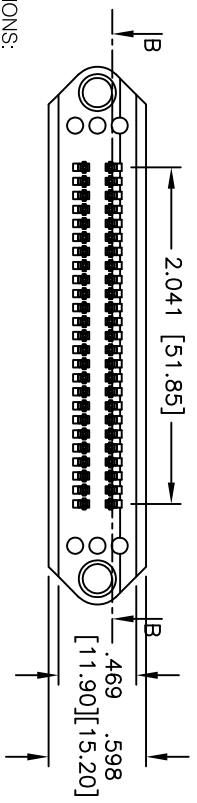

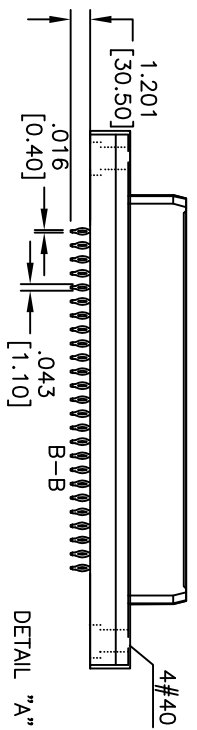
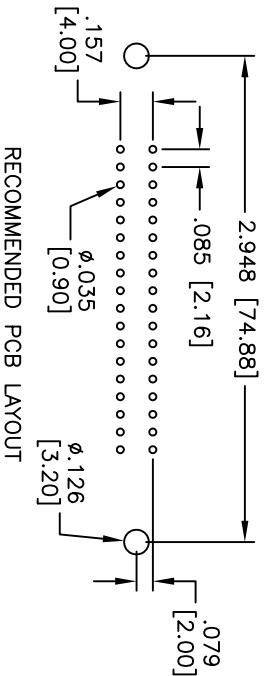



Rev	AWO #	Description	Date	Appr
-		RELEASED	10/29/09	

APPROVED: _____
 DATE: _____ TITLE: _____

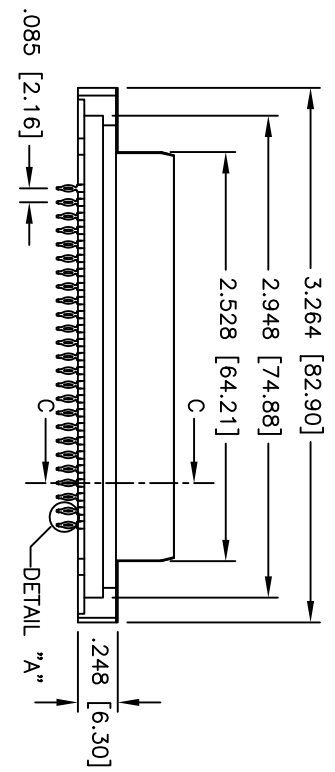

SPECIFICATIONS:

- Material: Insulator: PBT, glass reinforced, rated UL 94V-0
- Insulator color: Black
- Contacts: Phosphor Bronze
- Shell: Steel, Nickel plated
- Hood: Steel

Plating: Gold flash over Nickel underplate on mating area, Tin over Copper underplate on tails.

Electrical:
 Current rating: 5 Amp max
 Contact resistance: 25 mohms max
 Insulation resistance: 1000 Mohms min @ 500V
 Dielectric withstanding voltage: 1000 VAC for 1 minute
 Temperature Rating: Operating temperature: -55°C to +105°C



Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 235°C for 5 seconds

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MINATURE RIBBON PLUG, CENTRONIC PCB STRAIGHT
 #440 THREADED HOLES, PRESS FIT PIN

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

REF: S00033T	SCALE: NTS	SHEET 1 OF 1
SIZE X	PART NO. MR50-SB-34-PF-BK	REV. -