




Rev	AWO #	Description	Date	Appr
-		RELEASED	12/10/04	

APPROVED: _____

DATE: _____ TITLE: _____

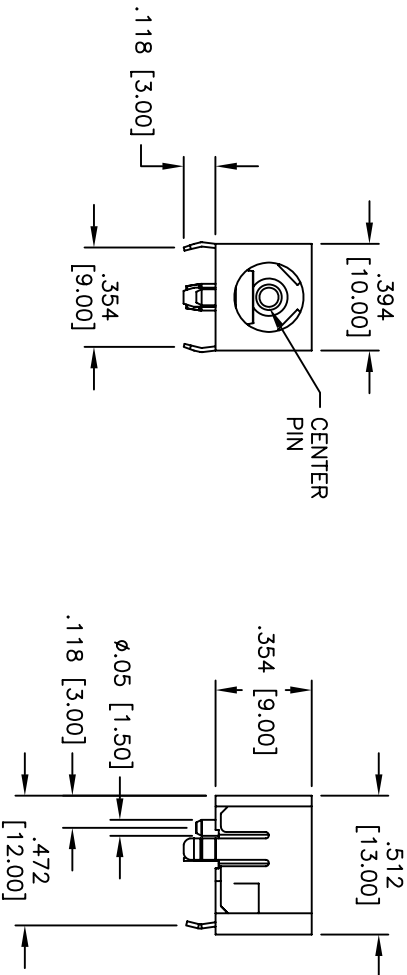

PART NO.	CENTER PIN DIA.
ADC-026-1	.079 [2.00]

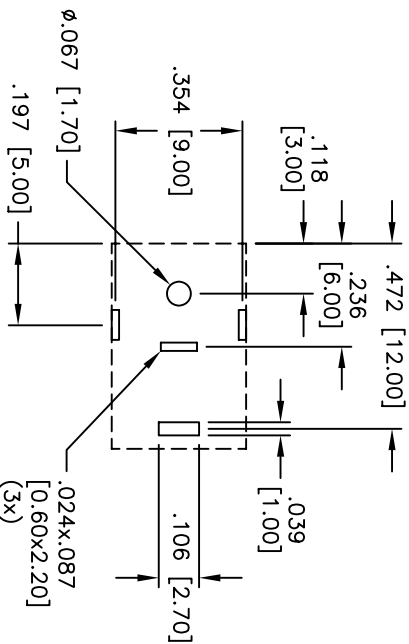

PCB LAYOUT

SPECIFICATIONS:

Material:

Insulator: PBT, Glass reinforced, rated UL 94V-0

Insulator color: Black

Center Pin: Brass, Nickel plated

Contacts: Copper Alloy

Plating:

Silver over Nickel underplate

Electrical:

Operating voltage: 12 VDC max.

Current rating: 1 Amp max.

Contact resistance: 30 mohms max. initial

Insulation resistance: 50 Mohms min.

Dielectric withstanding voltage: 250 VAC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +70°C

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 235 for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	
DRAWN	SS
CHECKED	
APPROVED	

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

DC POWER JACK

SIZE	PART NO.	REV.
X	ADC-026-X	-
REF:	SCALE:	SHEET 1 OF 1
	NTS	