


# CLE300F

## Aluminum Gallium Arsenide IRED Flat Lead PLCC Package



May, 2003

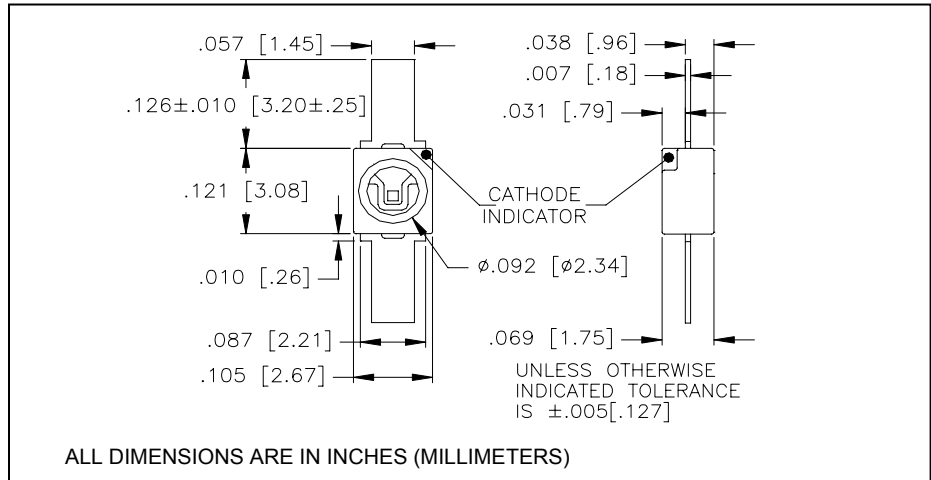

### features

- Flat lead PLCC package
- $\pm 60^\circ$  emission angle
- 850 nm peak wavelength

### description

The CLE300F is an 850nm high output infrared emitting diode chip featuring current AlGaAs technology. It is mounted in a compact, embedded leadframe package with flying lead configuration and overcoated with clear epoxy to provide a wide emission pattern. Contact Clairex for alternative wavelength emitter chips, different lenses and lead configurations.

### absolute maximum ratings ( $T_A = 25^\circ\text{C}$ unless otherwise stated)

storage temperature	-40°C to +125°C
operating temperature	-40°C to +125°C
lead soldering temperature <sup>(1)</sup>	240°C
maximum continuous current <sup>(2)</sup>	50mA
peak forward current (10 $\mu$ s pulse width, 100pps)	1A
maximum power dissipation <sup>(3)</sup>	80mW
reverse voltage	3V

### notes:

1. 0.06" (1.5mm) from case for 5 seconds maximum. Maximum temperature can be 260°C if reflow soldering.
2. Derate linearly 0.40mA/°C from 25°C free air temperature to  $T_A = +125^\circ\text{C}$ .
3. Derate linearly 0.64mW/°C from 25°C free air temperature to  $T_A = +125^\circ\text{C}$ .

electrical characteristics ( $T_A = 25^\circ\text{C}$ unless otherwise noted)						
symbol	parameter	min	typ	max	units	test conditions
$P_O$	Total power output <sup>(4)</sup>	3.0	4.0	-	mW	$I_F = 20\text{mA}$
$V_F$	Forward voltage	-	1.4	1.6	V	$I_F = 20\text{mA}$
$I_R$	Reverse current	-	-	10	$\mu\text{A}$	$V_R = 3.0\text{V}$
$\lambda_p$	Peak emission wavelength	-	850	-	nm	$I_F = 20\text{mA}$
BW	Spectral bandwidth at half power points	-	60	-	nm	$I_F = 20\text{mA}$
$\theta_{HP}$	Emission angle at half power points	-	120	-	deg.	$I_F = 20\text{mA}$
$t_r$	Radiation rise time <sup>(5)</sup>	-	20	-	ns	$I_{F(PK)} = 20\text{mA}$
$t_f$	Radiation fall time <sup>(5)</sup>	-	40	-	ns	$I_{F(PK)} = 20\text{mA}$

- notes: 4. Power output is measured in an integrating sphere.  
5.  $f = 100\text{kHz}$ , D.C. = 50%. Pulse generator  $t_r$  and  $t_f < 200\text{ps}$ .

Clairex reserves the right to make changes at any time to improve design and to provide the best possible

Revised 12/01/04

Clairex Technologies, Inc.  
Phone: 972-265-4900

1301 East Plano Parkway  
Fax: 972-265-4949

Plano, Texas 75074-8524  
www.clairex.com