

D3L60

600V 3A


FEATURES

- High Voltage
- trr50ns
- Fully Isolated Molding
- Dielectric strength 1.5kV guaranteed

APPLICATION

- PFC
- Switching power supply
- Free Wheel
- CTV+B output, lighting

OUTLINE DIMENSIONS

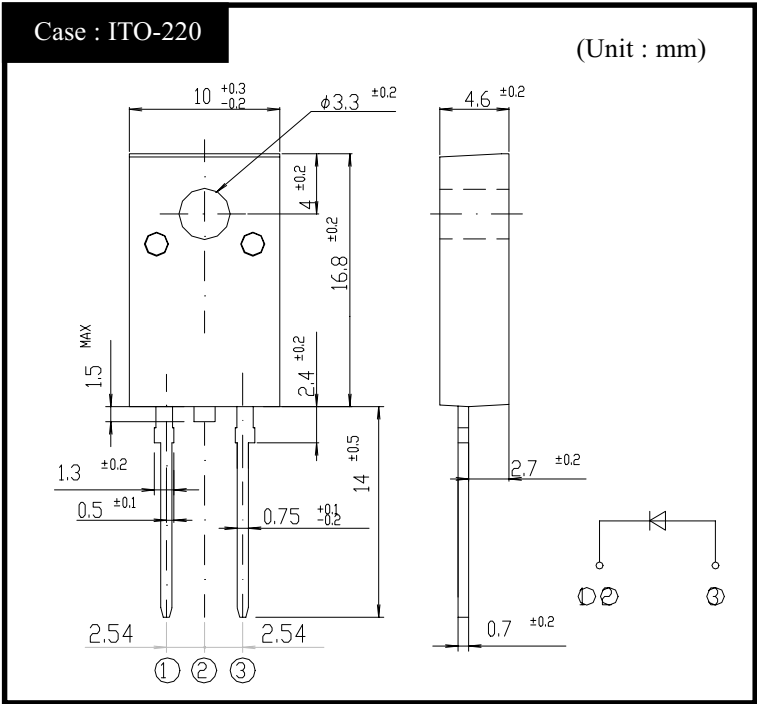

RATINGS

●Absolute Maximum Ratings (If not specified Tc=25°C)


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	Tstg		-55~150	°C
Operating Junction Temperature	Tj		150	°C
Maximum Reverse Voltage	VRM		600	V
Average Rectified Forward Current	IO	50Hz sine wave, R-load, Tc=127°C	3	A
Peak Surge Forward Current	IFSM	50Hz sine wave, Non-repetitive 1 cycle peak value, Tj=25°C	60	A
Dielectric Strength	Vdis	Terminals to case, AC 1 minute	1.5	kV
Mounting Torque	TOR	(Recommended torque: 0.3N·m)	0.5	N·m

●Electrical Characteristics (If not specified Tc=25°C)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	VF	IF=3A, Pulse measurement	Max 1.65	V
Reverse Current	IR	VR=VRM, Pulse measurement	Max 10	μA
Reverse Recovery Time	trr	IF=0.5A, IR=1A	Max 50	ns
Thermal Resistance	θjc	junction to case	Max 4.5	°C/W
	θjf	junction to heat-sink (Reference value)	Max 6	


D3L60

Forward Voltage

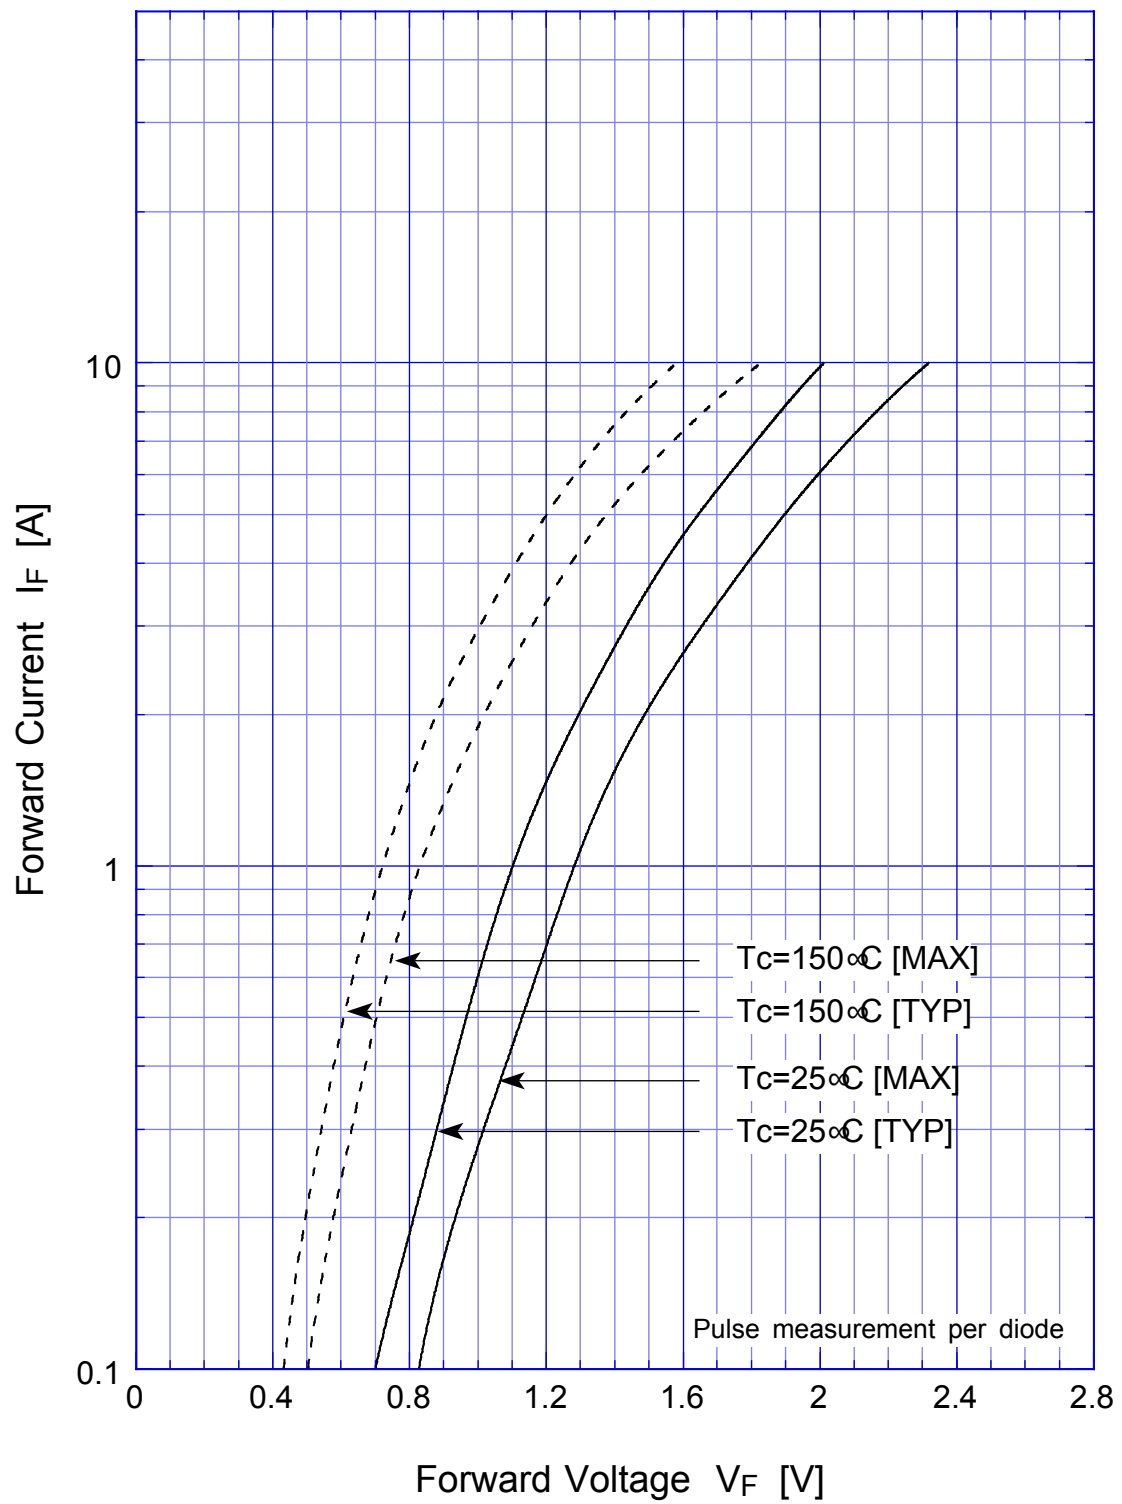


D3L60

Forward Power Dissipation

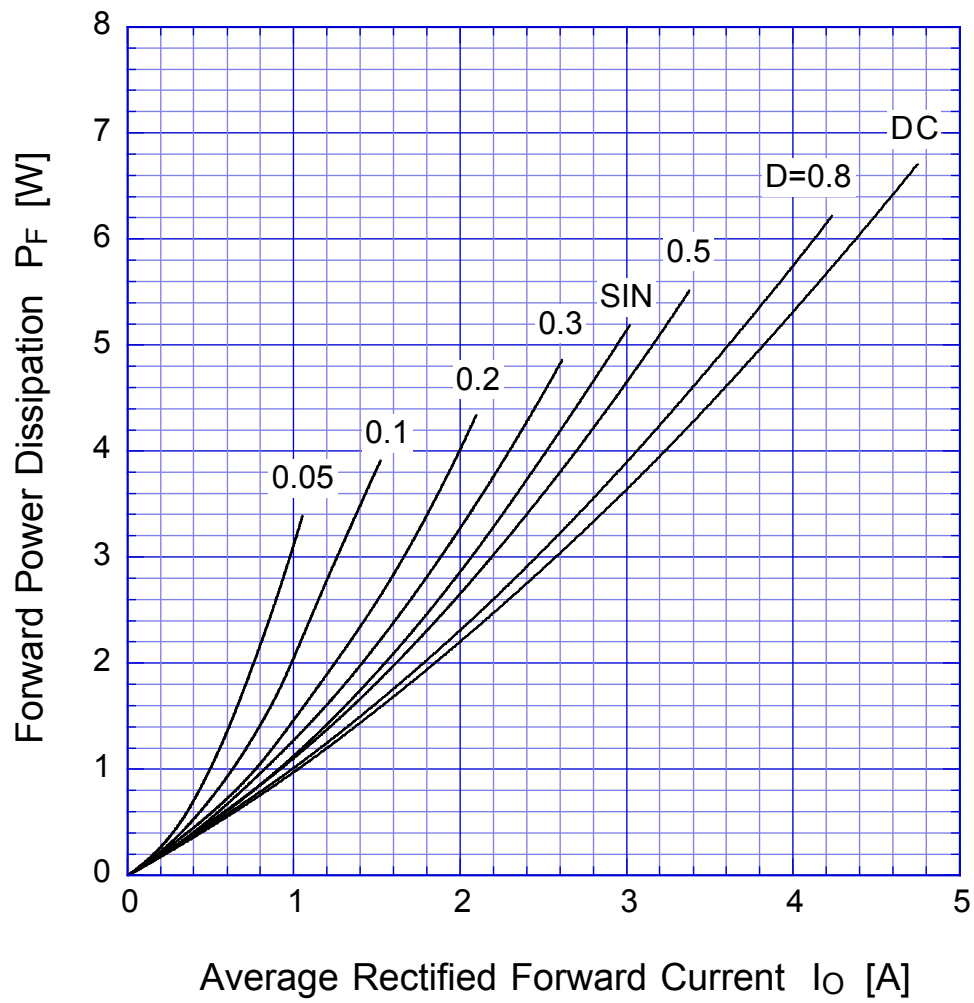


$T_j = T_{jmax}$

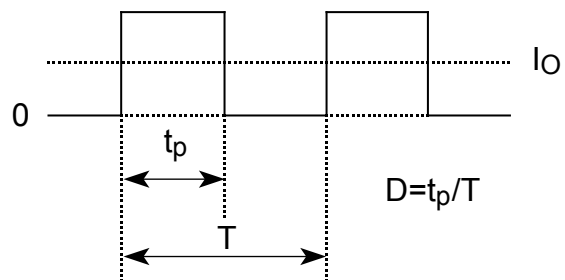


D3L60

Derating Curve

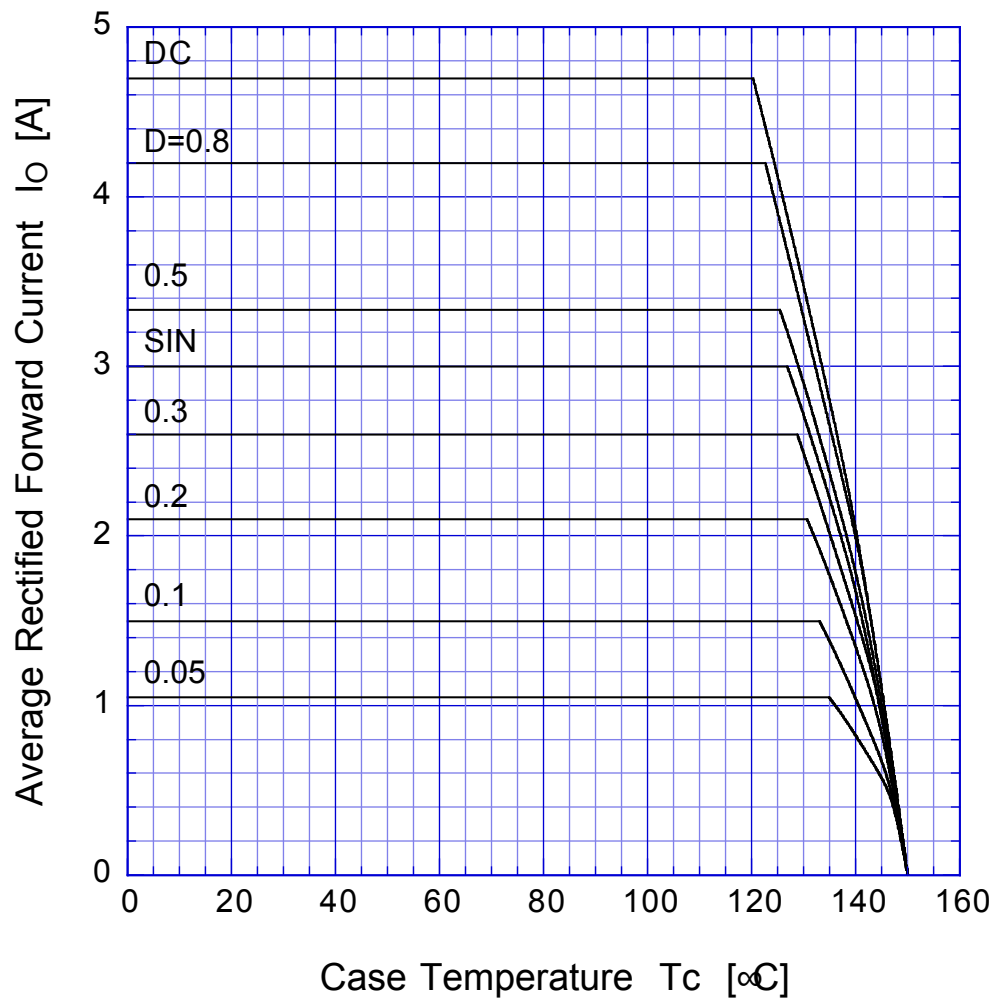


$$V_R = V_{RM}$$

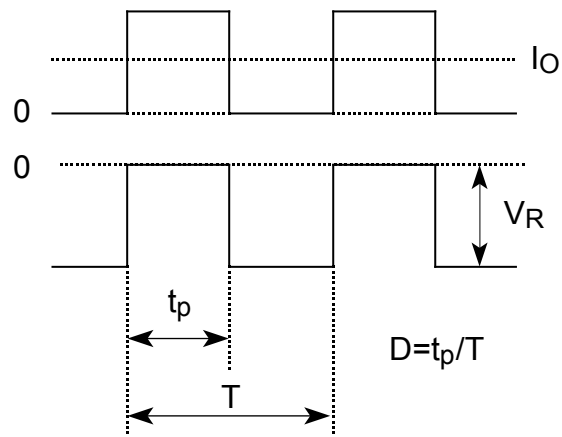

D3L60

Peak Surge Forward Capability

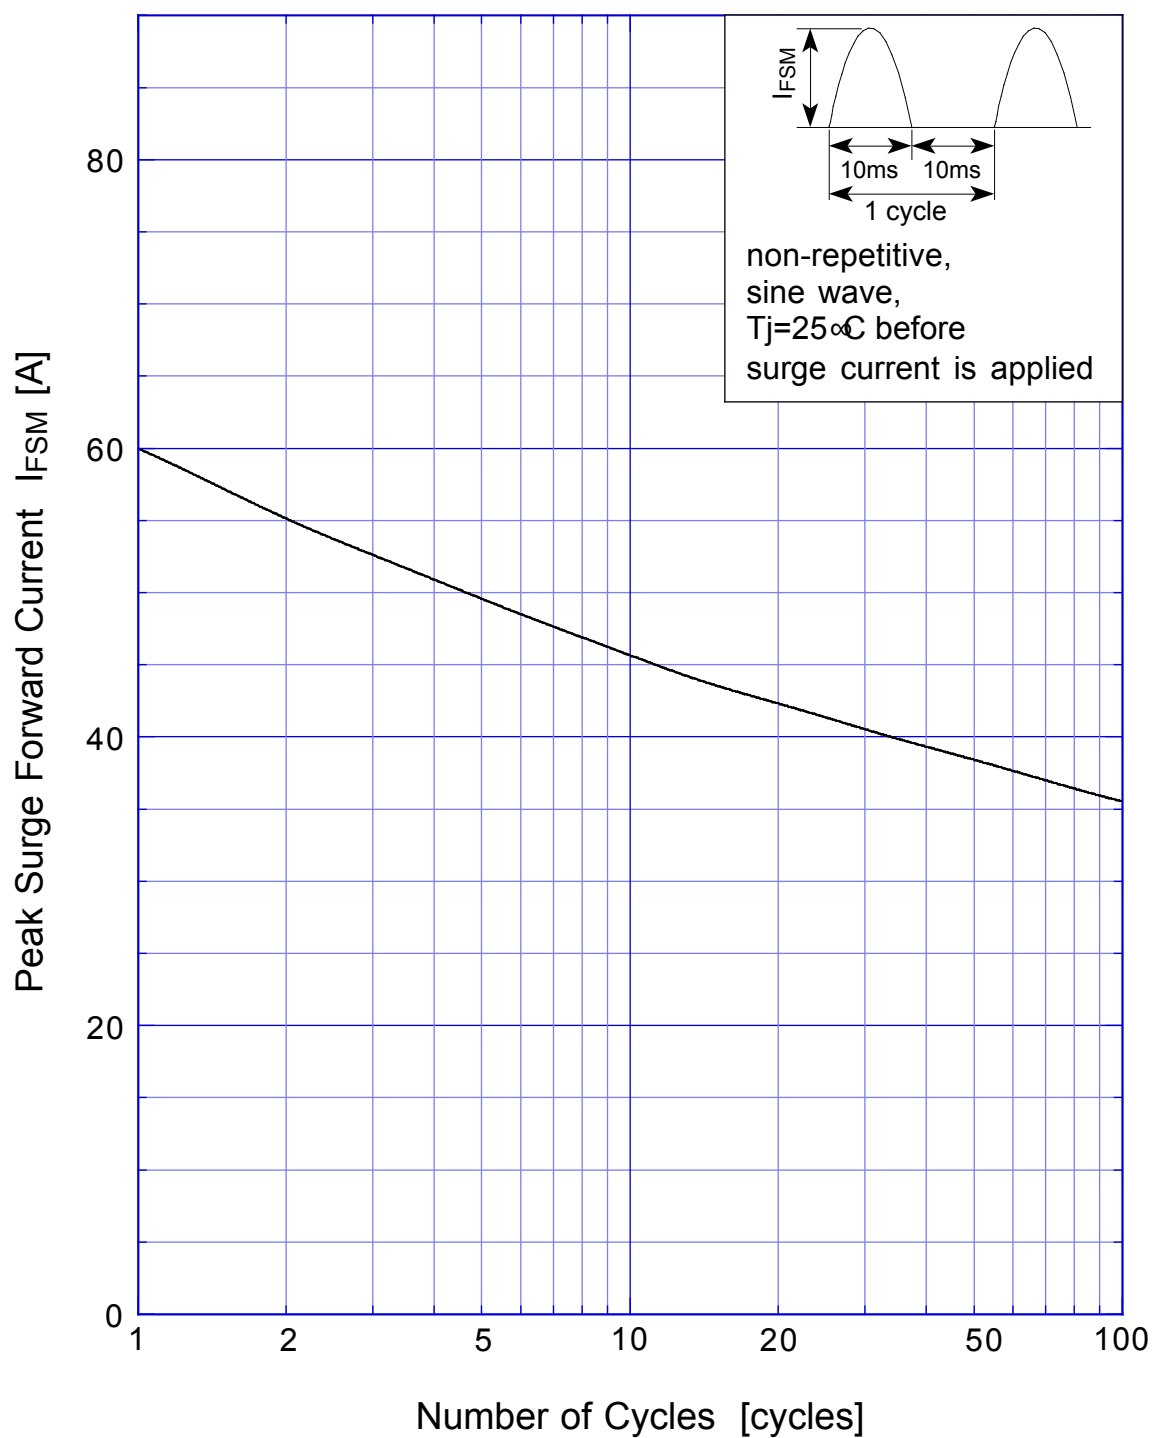

D3L60 Junction Capacitance

