

## UT9435H



Power MOSFET

P-CHANNEL  
ENHANCEMENT MODE

## ■ DESCRIPTION

The UTC UT9435H provide excellent  $R_{DS(ON)}$ , low gate charge and fast switching speed. It has been optimized for power management applications.

## ■ SYMBOL

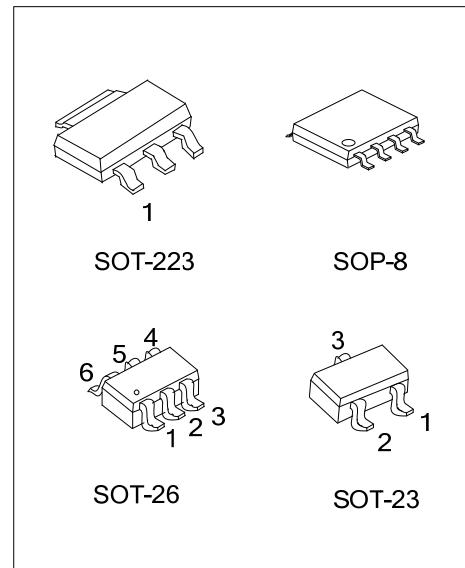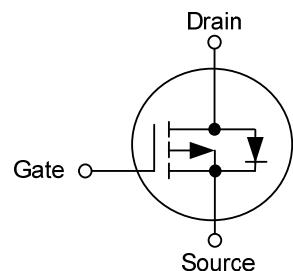

## ■ ORDERING INFORMATION

Ordering Number	Package	Pin Assignment								Packing
		1	2	3	4	5	6	7	8	
UT9435HG-AA3-R	SOT-223	G	D	S	-	-	-	-	-	Tape Reel
UT9435HG-AE3-R	SOT-23	S	G	D	-	-	-	-	-	Tape Reel
UT9435HG-AG6-R	SOT-26	D	D	G	S	D	D	-	-	Tape Reel
UT9435HG-S08-R	SOP-8	S	S	S	G	D	D	D	D	Tape Reel

Note: Pin Assignment: G: Gate D: Drain S: Source

UT9435HG-AA3-R 	(1) R: Tape Reel (2) AA3: SOT-223, S08: SOP-8, AE3: SOT-23 AG6: SOT-26 (3) G: Halogen Free and Lead Free
--------------------	---

## ■ MARKING

SOT-223	SOT-23
 1	
SOT-26	SOP-8
	 Date Code Lot Code

■ ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ , unless otherwise specified)

PARAMETER	SYMBOL	RATING	UNITS
Drain-Source Voltage	$V_{DS}$	-30	V
Gate-Source Voltage	$V_{GS}$	$\pm 20$	V
Continuous Drain Current (Note 3)	$I_D$	$\pm 5.3$	A
Pulsed Drain Current (Note 1, 2)	$I_{DM}$	$\pm 20$	A
Power Dissipation	SOT-23 SOT-26	$P_D$ 0.38 0.48	W
Junction Temperature	$T_J$	+150	$^\circ\text{C}$
Storage Temperature	$T_{STG}$	-55 ~ +150	$^\circ\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER	SYMBOL	RATING	UNIT
Junction to Ambient	SOT-23 SOT-26	$\theta_{JA}$ 325 260	$^\circ\text{C}/\text{W}$

■ ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ , unless otherwise specified)







PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
<b>OFF CHARACTERISTICS</b>						
Drain-Source Breakdown Voltage	$BV_{DSS}$	$V_{GS} = 0 \text{ V}, I_D = -250 \mu\text{A}$	-30			V
Drain-Source Leakage Current	$I_{DSS}$	$V_{DS} = -24 \text{ V}, V_{GS} = 0 \text{ V}$			-1	$\mu\text{A}$
Gate-Source Leakage Current	$I_{GSS}$	$V_{DS} = 0 \text{ V}, V_{GS} = \pm 20 \text{ V}$			$\pm 100$	nA
<b>ON CHARACTERISTICS</b>						
Gate Threshold Voltage	$V_{GS(TH)}$	$V_{DS} = V_{GS}, I_D = -250 \mu\text{A}$	-1		-3	V
Drain-Source On-State Resistance (Note 2)	$R_{DS(ON)}$	$V_{GS} = -10 \text{ V}, I_D = -5.3 \text{ A}$ $V_{GS} = -4.5 \text{ V}, I_D = -4.2 \text{ A}$		44 74	50 90	$\text{m}\Omega$
On State Drain Current	$I_{D(ON)}$	$V_{DS} = -5 \text{ V}, V_{GS} = -10 \text{ V}$	-20			A
<b>DYNAMIC PARAMETERS</b>						
Input Capacitance	$C_{iss}$	$V_{DS} = -15 \text{ V}, V_{GS} = 0 \text{ V}, f = 1.0 \text{ MHz}$		1040		pF
Output Capacitance	$C_{oss}$			420		pF
Reverse Transfer Capacitance	$C_{rss}$			150		pF
<b>SWITCHING PARAMETERS</b>						
Turn-ON Delay Time (Note 2)	$t_{D(ON)}$	$V_{DD} = -15 \text{ V}, I_D = -1 \text{ A}, V_{GEN} = -10 \text{ V}, R_G = 6 \Omega$		19	26	ns
Turn-ON Rise Time	$t_R$			9	13	ns
Turn-OFF Delay Time	$t_{D(OFF)}$			74	105	ns
Turn-OFF Fall Time	$t_F$			36	50	ns
Total Gate Charge (Note 2)	$Q_G$	$V_{DS} = -15 \text{ V}, V_{GS} = -10 \text{ V}, I_D = -4.6 \text{ A}$		22.5	29	nC
Gate-Source Charge	$Q_{GS}$			2		nC
Gate-Drain Charge	$Q_{GD}$			6		nC
<b>DRAIN-SOURCE DIODE CHARACTERISTICS</b>						
Drain-Source Diode Forward Voltage (Note 2)	$V_{SD}$	$V_{GS} = 0 \text{ V}, I_S = -5.3 \text{ A}$		-0.84	-1.3	V

Notes: 1. Pulse width limited by  $T_{J(\text{MAX})}$ .




2. Pulse width  $\leq 300 \mu\text{s}$ , duty cycle  $\leq 2\%$ .

3. Surface mounted on 1 in<sup>2</sup> copper pad of FR4 board.

■ TYPICAL CHARACTERISTICS

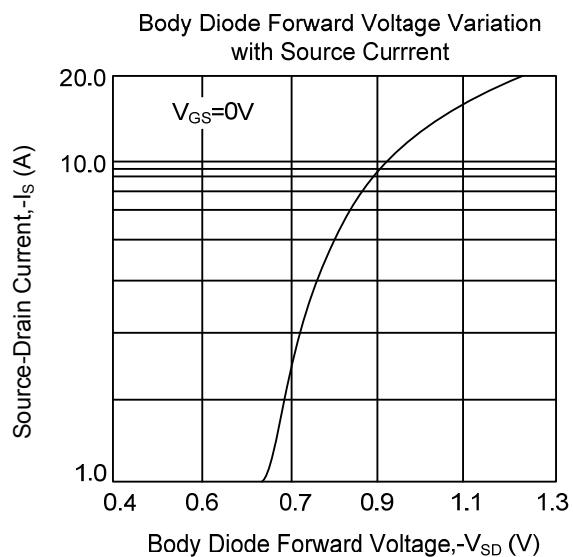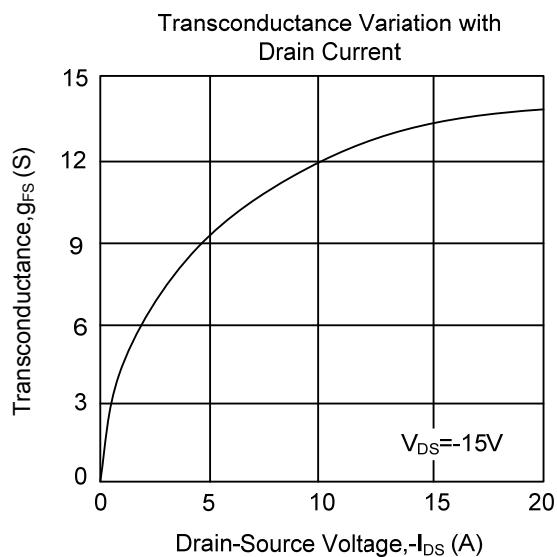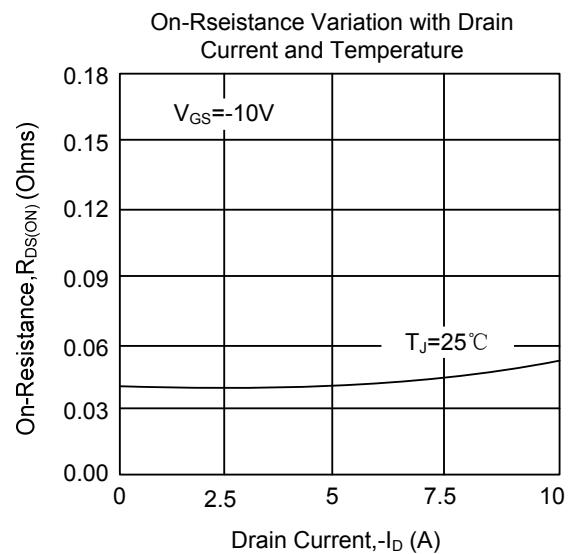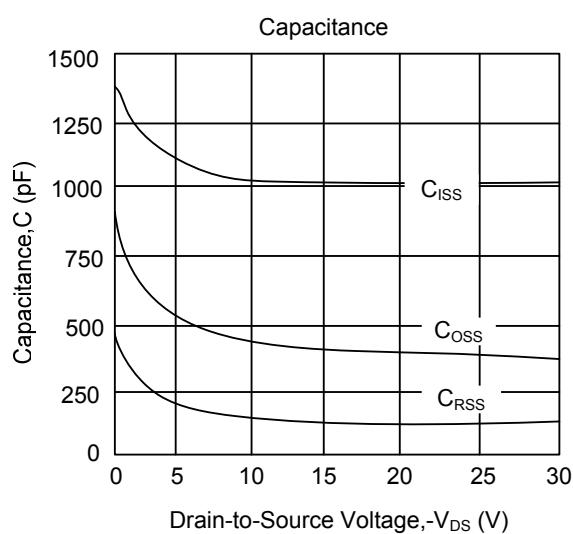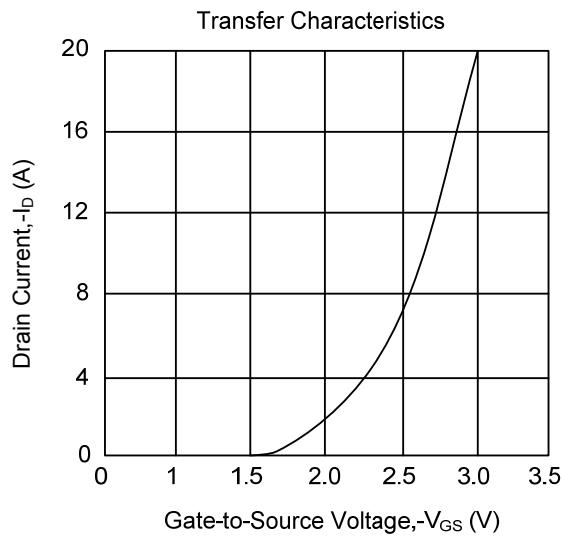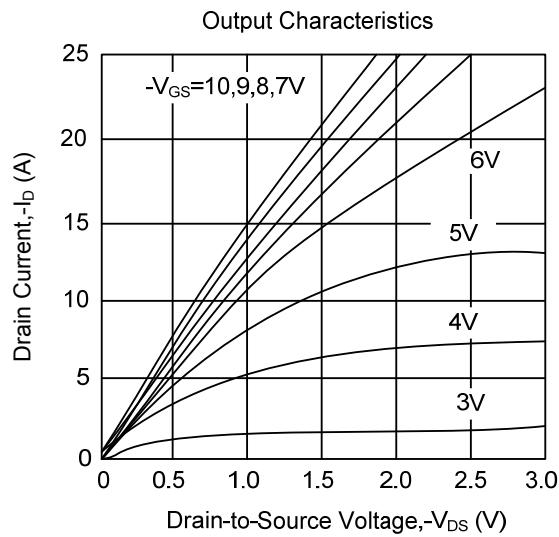

## ■ TYPICAL CHARACTERISTICS(Cont.)

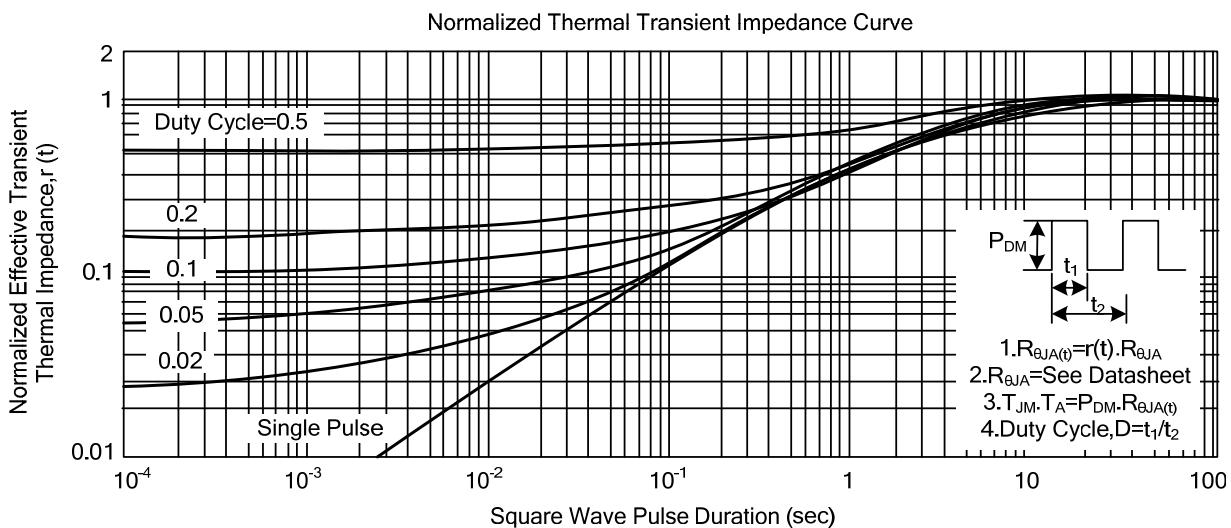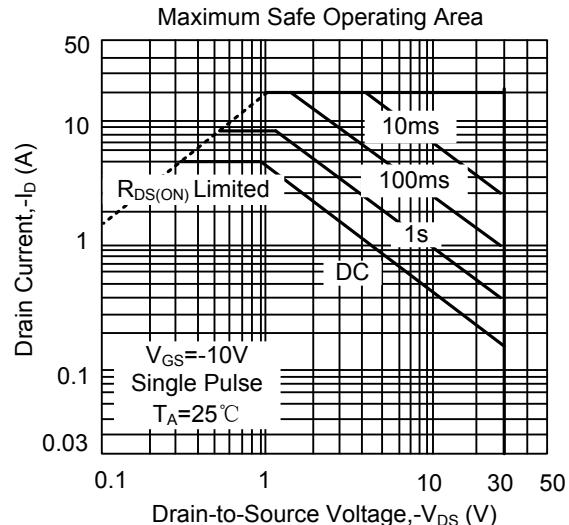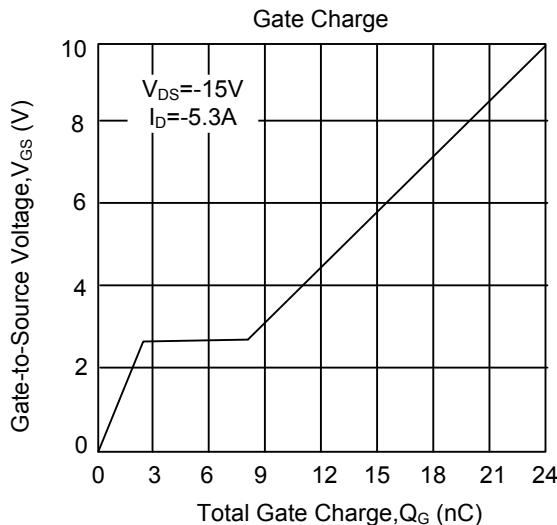

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.