

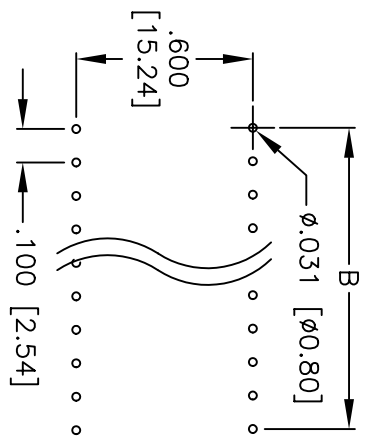
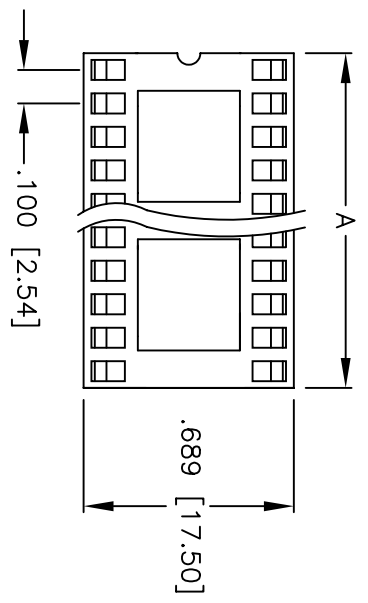


| Rev | AWO # | Description | Date     | Appr |
|-----|-------|-------------|----------|------|
| -   |       | RELEASED    | 11/08/04 |      |

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_



**RECOMMENDED  
PCB LAYOUT**

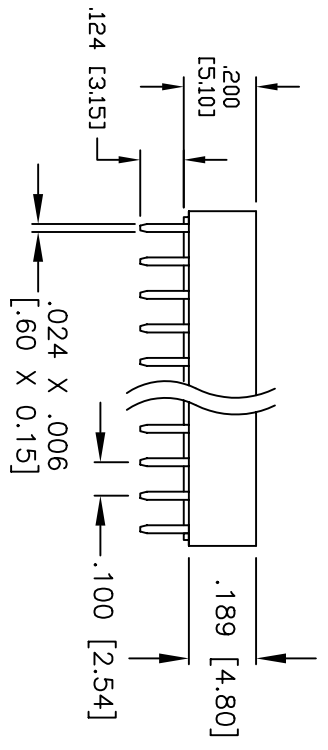

A = .100 [2.54] X No. of Positions Per Row  
 Positions available: 20, 24, 28, 32, 40 & 48

**SPECIFICATIONS:**

- Material: Insulator: PBT, glass reinforced, rated UL 94V-0
- Insulator color: Black
- Contacts: Phosphor Bronze
- Plating: Tin over Copper underplate overall
- Electrical: Operating voltage: 250 VAC max
- Current rating: 1 Amp max
- Contact resistance: 20 mohms max
- Insulation resistance: 5000 Mohms min @ 500 VDC
- Dielectric withstanding voltage: 1000 VAC for 1 minute
- Temperature Rating: Operating temperature: -55°C to +105°C
- Packaging: Anti-ESD plastic tubes

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: IC SOCKET, .600 ROW CENTERS, PCB,  
 TIN PLATED

|  |          |
|--|----------|
| UNLESS OTHERWISE SPECIFIED<br>ALL DIMENSIONS ARE INCHES [MM] |          |
| TOLERANCES: EXCEPT AS NOTED                                  |          |
| INCHES   | HOLDS    |
| .X ± .10   | ± .10    |
| .XX ± .020   | ± .015   |
| .XXX ± .015  | ± .010   |
| APPROVALS  | DATE     |
| DRAWN  | SS       |
| CHECKED  | 11/08/04 |
| APPROVED   |          |

|      |            |              |
|------|------------|--------------|
| SIZE | PART NO.   | REV.         |
| X    | ICS-6XX-T  | -            |
| REF: | SCALE: NTS | SHEET 1 OF 1 |