

LDC-100 Series

Compact, LED, 100W Constant Current AC/DC Power Supply



Key Features:

- 100W Output Power
- UL 8750 Approved
- Constant Current Output
- Active PFC
- 90 - 305 VAC Input
- IP65 / IP67 Rated
- Meets EN 55015, EN 61547
- Dimming Function
- >50 kHour Life Expectancy
- Lightning Surge Protection
- Over Volt/Temp Protection

Electrical Specifications

Specifications typical @ +25°C, 230 VAC input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.



Input

| Parameter | Conditions | Min. | Typ. | Max. | Units |
|---------------------------------|------------|----------------|------|------|-------|
| Input Voltage Range | | 90 | | 305 | VAC |
| | | 127 | | 431 | VDC |
| Input Frequency | | 47 | | 63 | Hz |
| Inrush Current, See Note 1 | 230 VAC | | 75 | | A Pk |
| | 115 VAC | | 1.60 | | |
| Input Current | 230 VAC | | 0.80 | | A |
| | 264 VAC | | 0.70 | | |
| Power Factor Correction | | 0.98 @ 115 VAC | | | |
| | | 0.95 @ 230 VAC | | | |
| | | 0.93 @ 264 VAC | | | |
| Total Harmonic Distortion (THD) | See Note 2 | | | 10 | % |
| Turn On Delay, See Note 3 | 115 VAC | | 1.5 | | S |
| | 230 VAC | | 0.5 | | |
| Leakage Current | 277 VAC | | | 0.75 | mA |

Output

| Parameter | Conditions | Min. | Typ. | Max. | Units |
|-----------------------------|------------------------------|------|------|------|-------------------|
| Output Current Accuracy | | | ±5.0 | | % |
| Line Regulation | V _{IN} = Min to Max | | ±1.0 | | % |
| Ripple & Noise (20 MHz) | See Note 4 | | 2.0 | | V _{P-P} |
| Output Ripple Current | | | ±5.0 | | % |
| Hold-Up Time | 115 VAC | 12.0 | | | mS |
| Over Temperature Protection | ±10%, Autorecovery | | 85 | | °C |
| Short Circuit Protection | Continuous (Autorecovery) | | | | |
| Overload Protection | Autorecovery | 95 | | 107 | % _{IOUT} |

General

| Parameter | Conditions | Min. | Typ. | Max. | Units |
|------------------------|-----------------|----------------------------------|------|------|-------|
| Isolation Voltage, 60S | Input to Output | 3,750 | | | |
| | Input to FG | 2,000 | | | VAC |
| | Output to FG | 500 | | | |
| Insulation Resistance | Input to Output | 100 MΩ / 500 VDC / 25°C / 70% RH | | | |
| | Input to FG | 100 MΩ / 500 VDC / 25°C / 70% RH | | | |
| | Output to FG | 100 MΩ / 500 VDC / 25°C / 70% RH | | | |

EMI Characteristics

| Parameter | Standard |
|-----------|---|
| EMI | EN 55015; EN 6100-3-2, -3; FCC Part 18; CNS 14115; GB 17743 |
| EMS | EN 61547; EN 61000-4-2,-3, -4, -5, -6, -8, -11; GB 17625.1 |
| Surge | 10 kV (L/N - FG), 5 kV (L-N)/1.2 x 50 μS |

Environmental

| Parameter | Conditions | Min. | Typ. | Max. | Units |
|-----------------------------|--|------|------|------|-------|
| Operating Temperature Range | Ambient | -40 | +25 | +70 | °C |
| Storage Temperature Range | | -40 | | +85 | °C |
| Cooling | Free Air Convection (See Derating Curve on Page 2) | | | | |
| Humidity | RH, Non-condensing | | | 95 | % |

Physical

| | | | | | |
|-----------|----------------------------------|--|--|--|--|
| Case Size | See Mechanical Diagrams (Page 4) | | | | |
| Weight | 32.1 Oz (950g) | | | | |

Reliability Specifications

| Parameter | Conditions | Min. | Typ. | Max. | Units |
|------------------|---|------|------|------|--------|
| MTBF | MIL HDBK 217F, 25°C, Gnd Benign | 220 | | | kHours |
| Life Expectancy | See Note 5 | 50 | | | kHours |
| Safety Standards | UL 8750 Approved, Meets EN 61347, GB 19510.1, GB 19510.14 | | | | |
| Vibration | 5 - 500 Hz, 1G, 1 Oct/Min, 2 Cycles, Period for 75 Min. Each Along X, Y, & Z Axis | | | | |



MicroPower Direct

292 Page Street
Suite D
Stoughton, MA 02072
USA

T: (781) 344-8226
F: (781) 344-8481
E: sales@micropowerelectronics.com
W: www.micropowerelectronics.com



www.micropowerelectronics.com

| Model Number | Output | | | | Output Power (W) | Efficiency (% Typ) |
|----------------|----------|-----------------|---------------------|-----------------|------------------|--------------------|
| | Current | | Voltage Range (VDC) | OVP Level (VDC) | | |
| | Max (mA) | Adj. Range (mA) | | | | |
| LDC-100-1650 x | 1,650 | 1,260 - 1,650 | 31 - 58 | 62 - 80 | 96 | 90 |
| LDC-100-1960 x | 1,960 | 1,470 - 1,960 | 36 - 49 | 54 - 73 | 96 | 90 |
| LDC-100-2290 x | 2,290 | 1,680 - 2,290 | 31 - 42 | 49 - 65 | 96 | 90 |
| LDC-100-2740 x | 2,740 | 2,100 - 2,740 | 26 - 35 | 41 - 55 | 96 | 90 |
| LDC-100-3560 x | 3,560 | 2,730 - 3,560 | 21 - 27 | 31 - 37 | 96 | 90 |


Notes:

1. Inrush current is given for a cold start at 25°C.
2. Total Harmonic Distortion (THD) is specified with an input of 230 VAC/50 Hz at full load.
3. Turn on delay is specified at full load.
4. Ripple & noise is measured at 20 MHz. Connection to the unit is made with a 0.1 µF ceramic capacitor and a 22 µF electrolytic capacitor connected in parallel.
5. Life expectancy is calculated at 230 VAC, full load and a case temp of +70°C.
6. Recovery from an over voltage fault is automatic.


Package Type

| Model | Ingress Protection | Dimming Function |
|----------------|--------------------|---|
| LDC-100-xxxx A | IP65 | Adjust by internal, variable resistor |
| LDC-100-xxxx B | IP67 | Adjust by external resistor, DC voltage level or PWM signal |


Derating Curve: Temperature

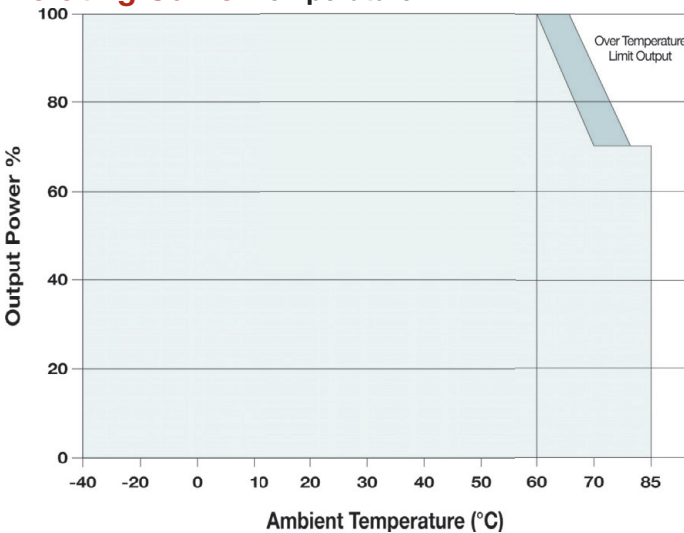


Derating Curve: Input Voltage

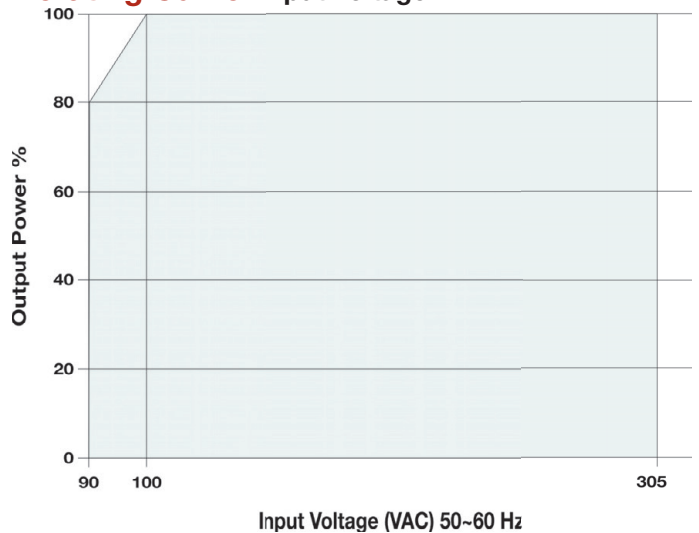


Efficiency vs Load: LDC-100-2740

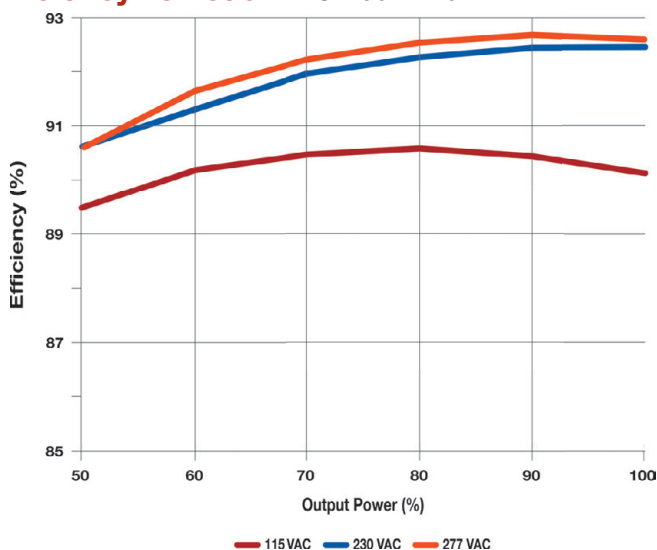


PFC vs Load: LDC-100-2740

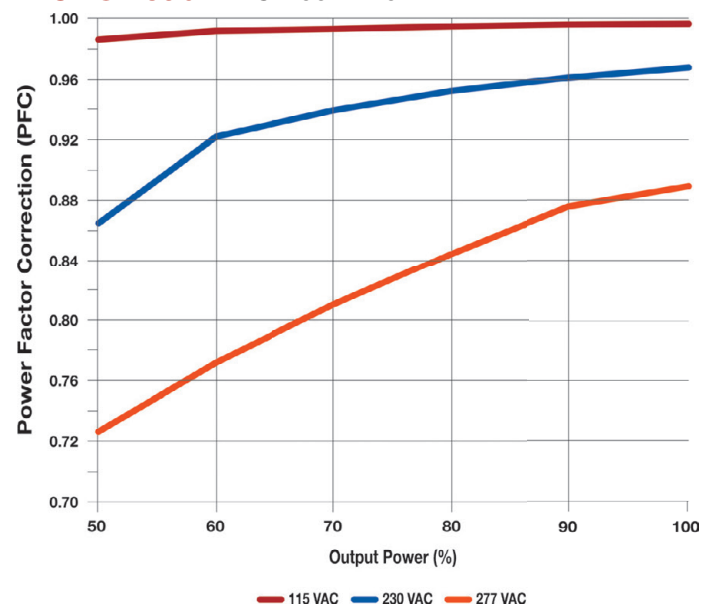

Functional Block Diagram

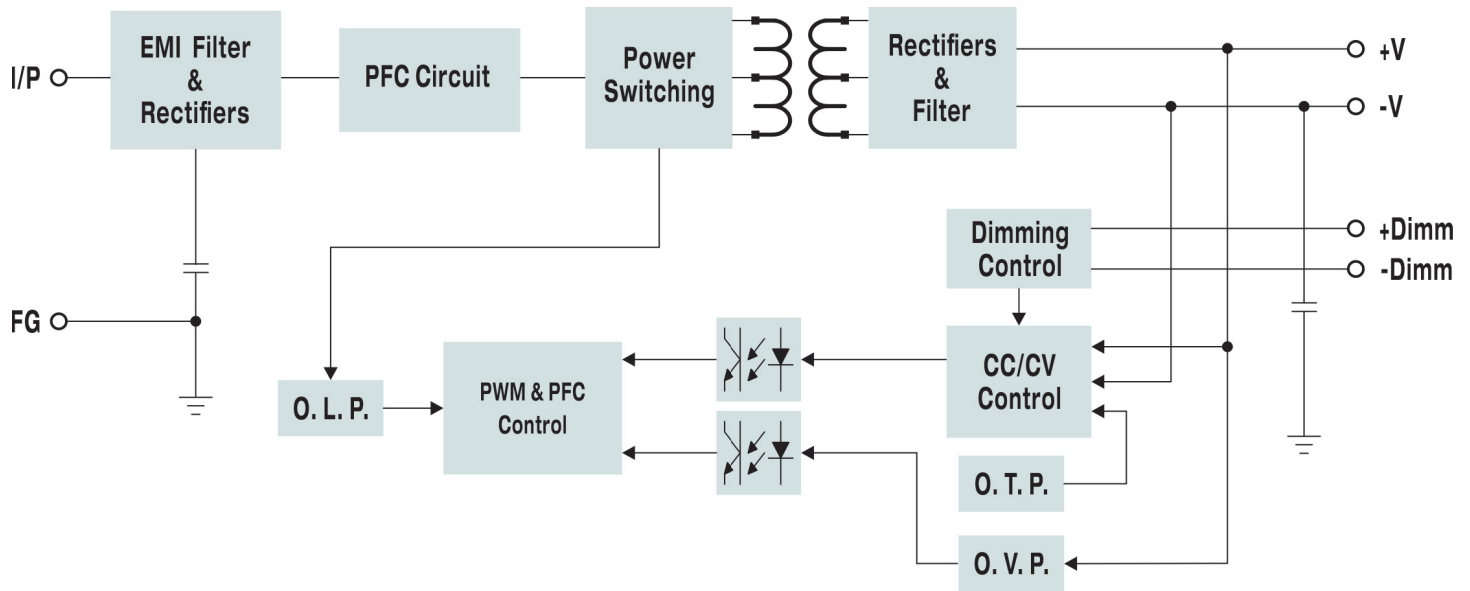

Dimming Mode: B Model

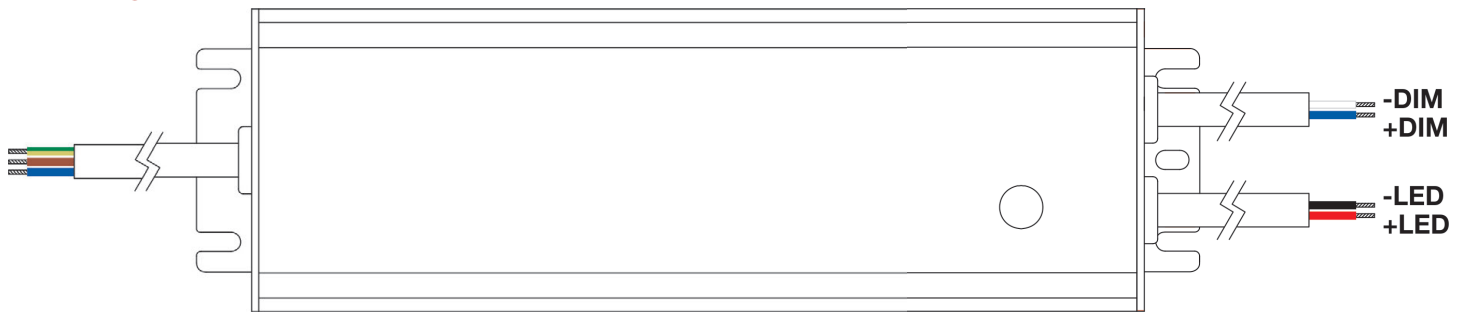

With the LDC-100 "B" model, the output current level can be adjusted (Dimmed) by three different methods; Resistive, Analog or Digital. Adjustments are made using the +DIM and -DIM inputs.

Resistive: Connect a 0.1 to 10 kΩ resistor between the DIM+ (Blue) and DIM- (White) wires

| | | | | | | | | | | | |
|-----------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|---------|
| Input Frequency | 10 kΩ | 20 kΩ | 30 kΩ | 40 kΩ | 50 kΩ | 60 kΩ | 70 kΩ | 80 kΩ | 90 kΩ | 100 kΩ | Open |
| Percentage of Rated Current | 10% | 20% | 30% | 40% | 50% | 60% | 70% | 80% | 90% | 100% | 95~105% |

Analog: Apply 1 VDC to 10 VDC level between the DIM+ (Blue) and DIM- (White) wires

| | | | | | | | | | | | |
|-----------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|---------|
| Adjust Voltage | 1 VDC | 2 VDC | 3 VDC | 4 VDC | 5 VDC | 6 VDC | 7 VDC | 8 VDC | 9 VDC | 10 VDC | Open |
| Percentage of Rated Current | 10% | 20% | 30% | 40% | 50% | 60% | 70% | 80% | 90% | 100% | 95~105% |


Digital: Apply a PWM signal (100 Hz - 3 kHz) between the DIM+ (Blue) and DIM- (White) wires

| | | | | | | | | | | | |
|-----------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|---------|
| Duty Cycle | 10% | 20% | 30% | 40% | 50% | 60% | 70% | 80% | 90% | 100% | Open |
| Percentage of Rated Current | 10% | 20% | 30% | 40% | 50% | 60% | 70% | 80% | 90% | 100% | 95~105% |

Notes:

1. The -DIM (White) and -LED (Black) wires should not be connected.
2. The Dimming function will not turn the lighting fixture totally off. For more info on how to do this, please contact the factory

Mechanical Dimensions: A Model

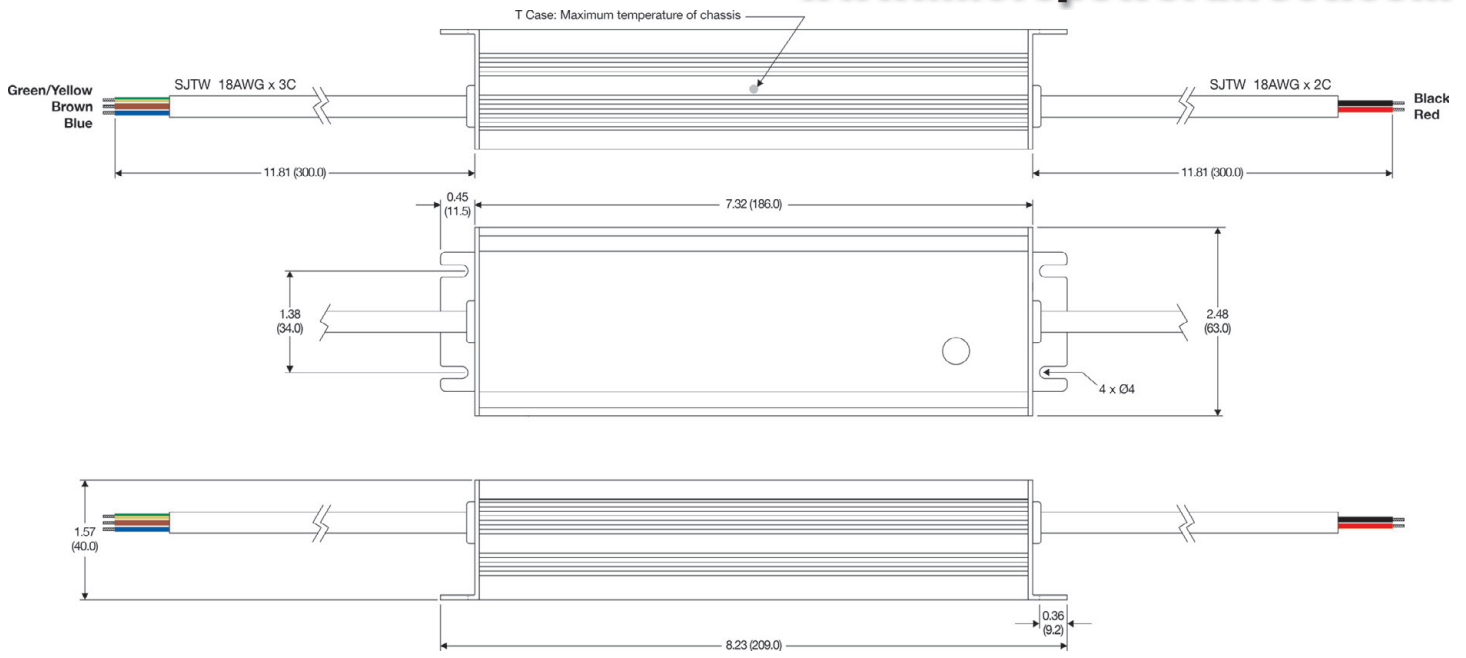


Wire Connections: Input

| Color | Function |
|--------------|--------------|
| Green/Yellow | Field Ground |
| Brown | AC-Line |
| Blue | AC-Neutral |

Wire Connections: Output

| Color | Function |
|-------|----------|
| Black | -LED |
| Red | +LED |

Mechanical Dimensions: B Model (Dimming Function)

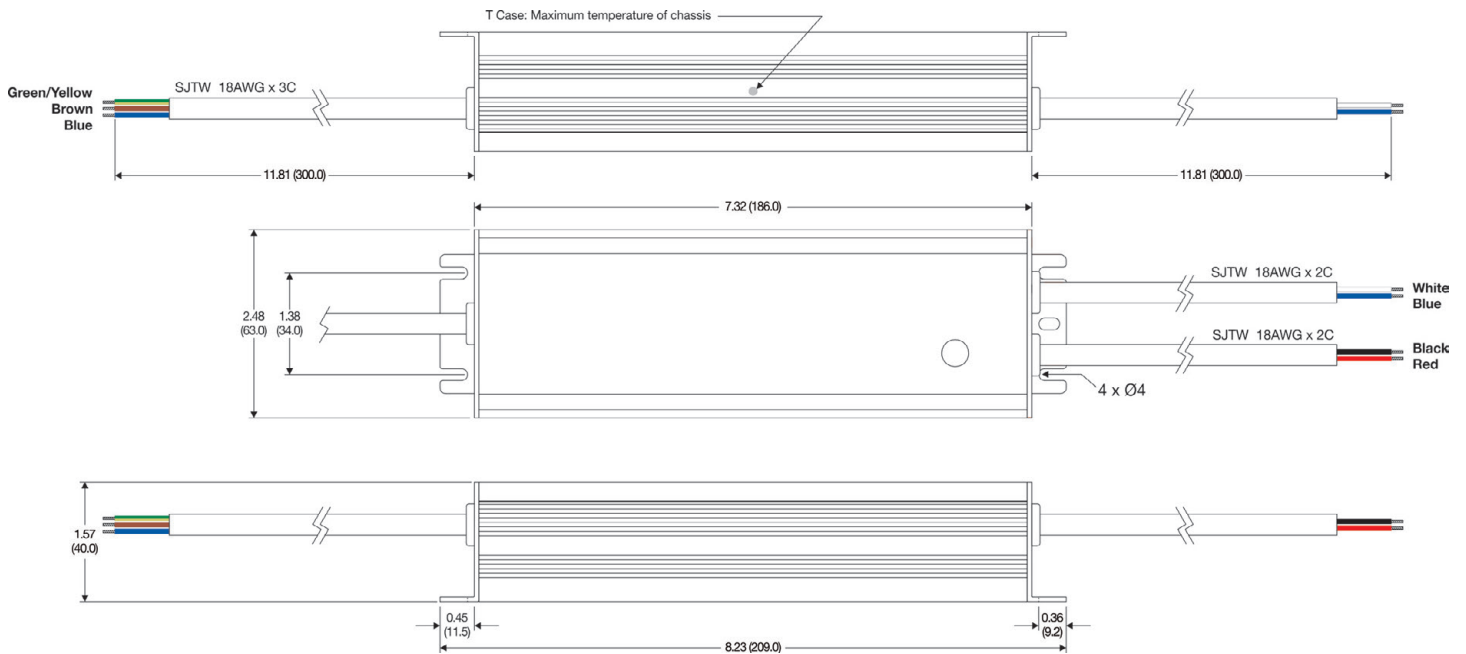

Wire Connections: Input

| Color | Function |
|--------------|--------------|
| Green/Yellow | Field Ground |
| Brown | AC-Line |
| Blue | AC-Neutral |

Wire Connections: Output

| Color | Function |
|-------|----------|
| White | -DIM |
| Blue | +DIM |
| Black | -LED |
| Red | +LED |



MicroPower Direct
We Power Your Success - For Less!