
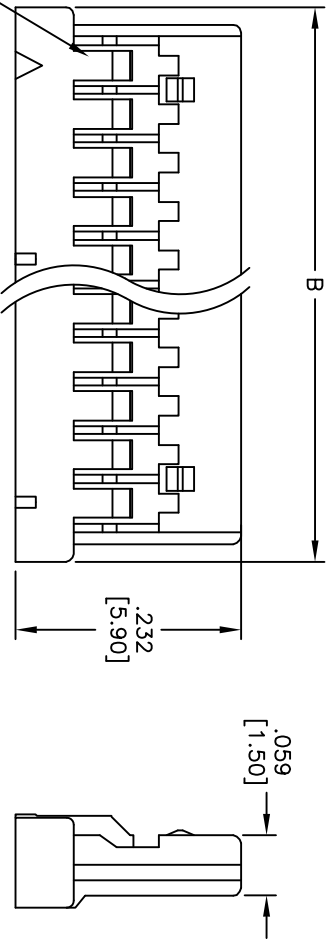


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/11/08	
A		REVISED SHAPE	11/18/10	

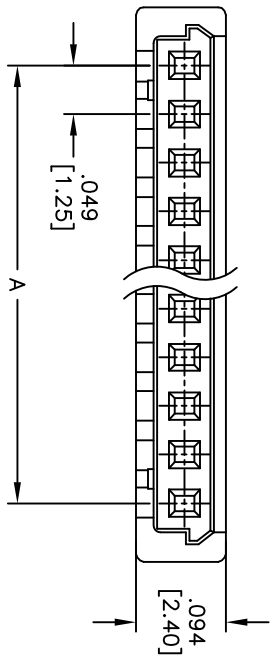

**SPECIFICATIONS:**  
 Material: Nylon 66, rated UL 94V-0  
 Insulator color: White

**Electrical:**  
 Voltage rating: 100 VAC/DC max  
 Current rating: 1 Amp max

Insulation resistance: 500 Mohms min  
 Dielectric withstanding voltage: 500 VAC for 1 minute

**Temperature Rating:**  
 Operating temperature: -25°C to +85°C

Environmental:  
 Lead free, RoHS compliant.  
 Recommended soldering temp: 235°C for 5 sec.



Positions: 2 thru 10, 12, 15, 20, 25, 30  
 A = .049 [1.25] X NO. OF POSITIONS -1  
 B = .049 [1.25] X NO. OF POSITIONS + .077 [1.95]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
INCHES	[MM]
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: 1.25mm CRIMP HOUSING SINGLE ROW  
 2 THRU 30 POSITIONS

SIZE	PART NO.	REV.
X	125CH-D-XX	A

REF: S00723T SCALE: NTS SHEET 1 OF 1

6 5 4 3 2 1

A B C D