
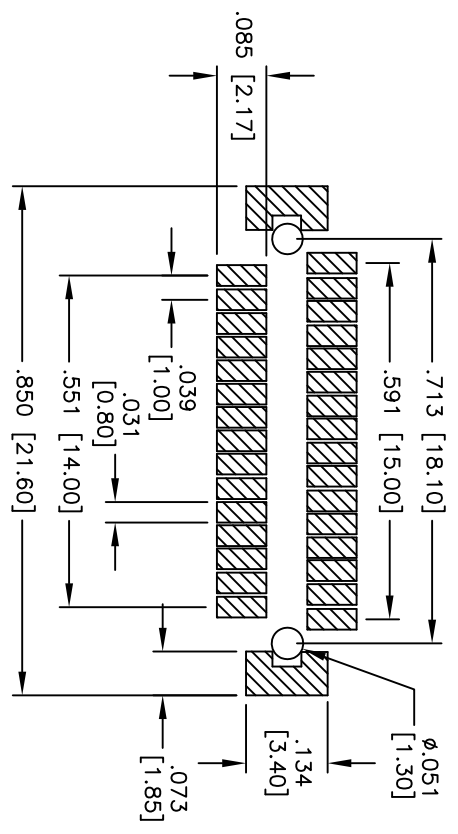
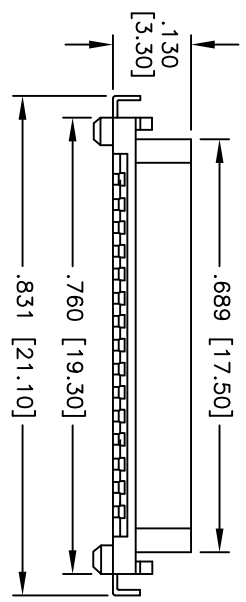
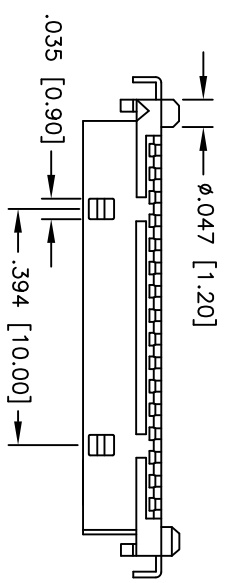


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/13/11	

APPROVED: _____
 DATE: _____ TITLE: _____

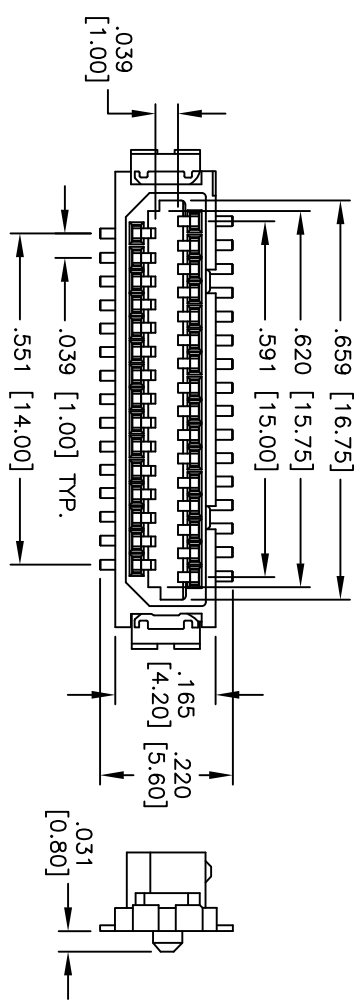

RECOMMENDED PCB LAYOUT

PACKAGED ON TAPE & REEL

SPECIFICATIONS:

Material: Nylon46, rated UL 94V-0
 Insulator color: Baige
 Contacts: Copper Alloy

Plating:
 Tin over Copper underplate overall.

Electrical:
 Voltage rating: 150V AC,DC
 Current rating: 0.5A AC,DC

Contact resistance: 500 mohms max
 Insulation resistance: 500 Mohms min
 Withstanding voltage: 250VAC for 1 minute
 Operating Temperature: -45°C to +125°C

Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .039 [1.00] BOARD TO BOARD SOCKET, SMT TYPE

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
INCHES		Holes	
.X	± .10	ØX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010
APPROVALS		DATE	
DRAWN	DY	4/13/11	
CHECKED			
APPROVED			
SIZE	PART NO.	REV.	
X	BB10-SA-031-T-3.3-T/R	-	
REF:	S00784T	SCALE:	NTS
SHEET 1 OF 1			