



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Approval Sheet For Product Specification

Issued Date:

Product Name: SAW IF Filter 112.32MHz

TST Parts No.: TB112EE

Customer Parts No.: _____

Company: _____
Division: _____
Approved by : _____
Date: _____

Checked by: _____ Asin Lin

Approval by: _____ Francis Chen

Date: _____ 2.4 ,2005



TAI-SAW TECHNOLOGY CO., LTD.

No.3, Industrial 2nd Rd., Ping-Chen Industrial District, Taoyuan, Taiwan, R.O.C.
 TEL: 886-3-4690038 FAX: 886-3-4697532
 E-mail: tstsales@mail.taisaw.com

SAW Filter 112.32 MHz
 MODEL NO.: TB112EE

REV. NO.:3

A. MAXIMUM RATING:

1. Input Power Level : 0 dBm
2. DC Voltage Vdc: 10V
3. Operating Temperature: -10°C to 65°C
4. Storage Temperature: -40°C to 85°C


RoHS Compliant
 Lead free
 Lead-free soldering

B. ELECTRICAL CHARACTERISTICS:

Item	Unit.	Min.	Type.	Max.	Note
Center frequency, F_c	MHz	-	112.32	-	1
Insertion Loss, IL	dB	-		12.5	
Passband width, BW3	MHz	1.1		-	1
Group delay ripple in $F_c \pm 0.55\text{MHz}$, GDT	nS	-		200	
Attenuation:(Reference level from Min IL)					
$F_c - 5.184$ to -3.456MHz	dB	40		-	1
$F_c - 3.456$ to -1.728MHz	dB	34		-	1
$F_c - 1.728$ to -1.44MHz	dB	18		-	1
$F_c + 1.44$ to $+1.728\text{MHz}$	dB	18		-	1
$F_c + 1.728$ to $+3.456\text{MHz}$	dB	34		-	1
$F_c + 3.456$ to $+5.184\text{MHz}$	dB	40		-	1
Impedance at F_c Input $Z_{IN} = R_{IN} // C_{OUT}$	3.9KΩ // 5.7 PF				2
Output $Z_{OUT} = R_{OUT} // C_{OUT}$	3.2K Ω // 6.2 PF				2


Note1. The standard definitions is in JIS C 6703

Note2.

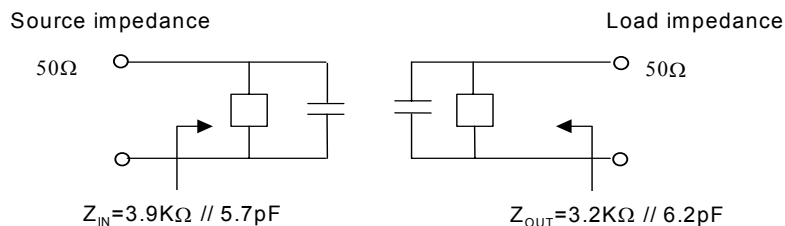


C. FREQUENCY CHARACTERISTICS:


(1) Frequency Response:

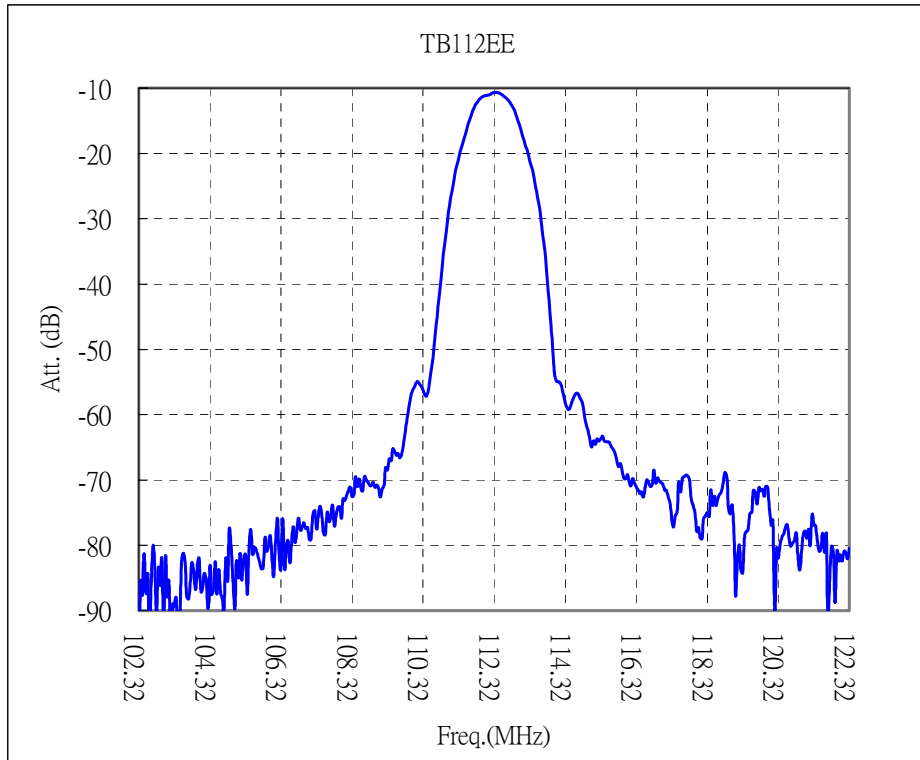


(2) Amplitude ripple & Group Delay:

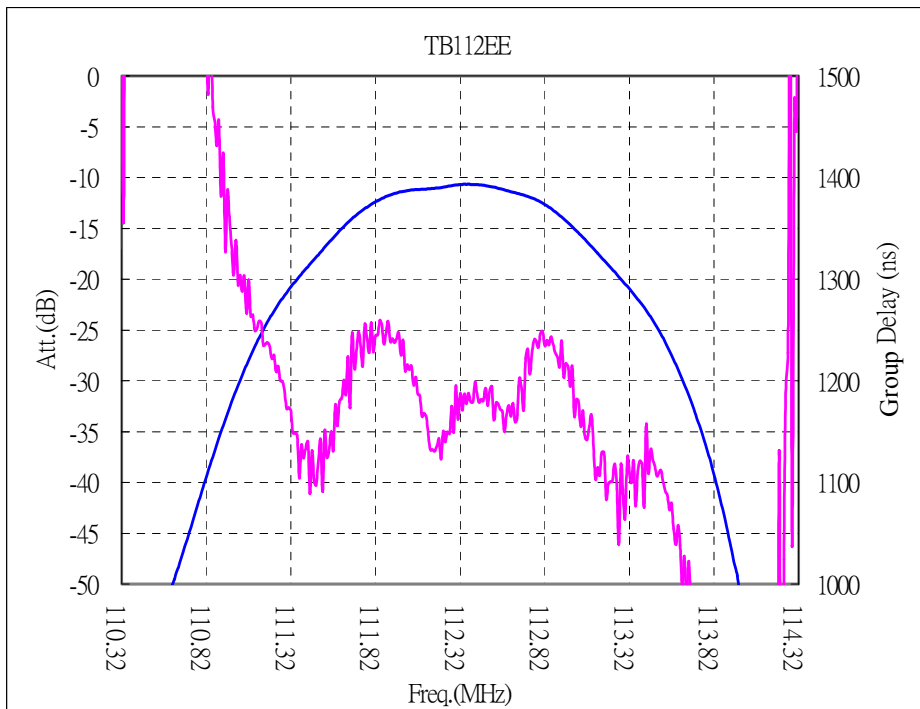

D. MEASUREMENT CIRCUIT:

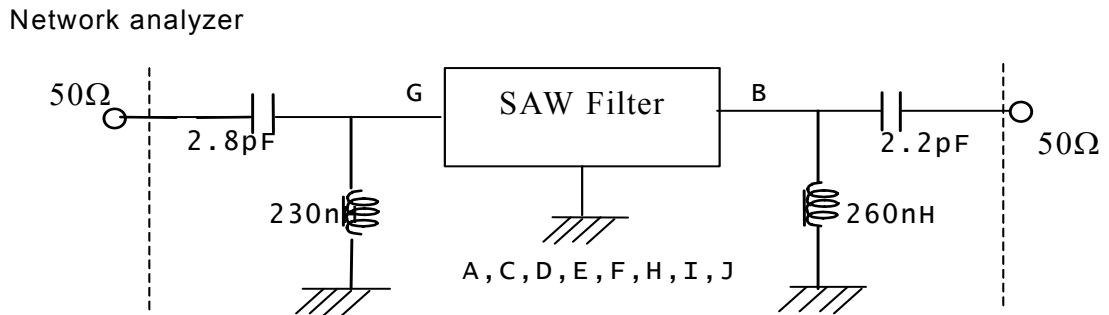


E. OUTLINE DRAWING:

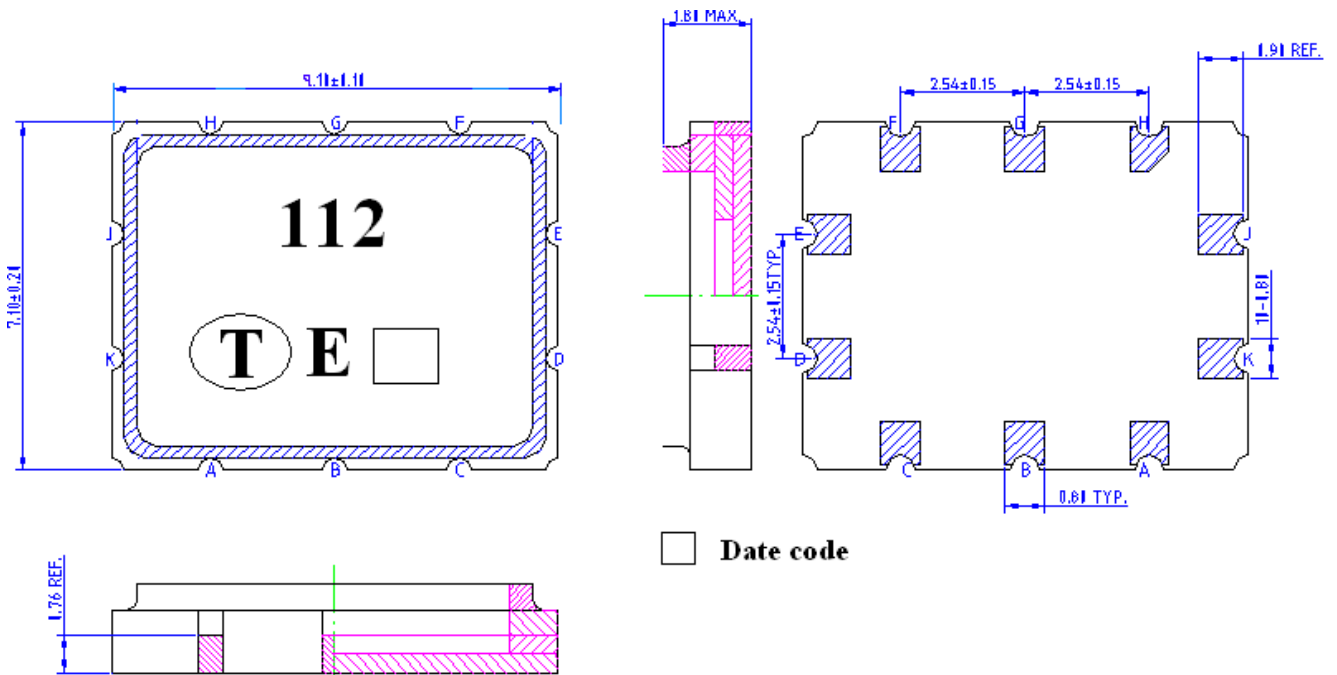

F. PACKING:

1. REEL DIMENSION

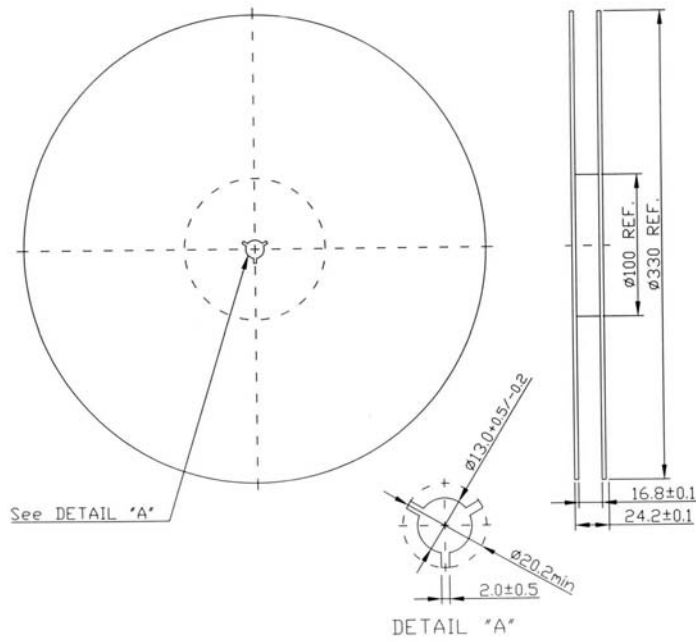

2. TAPE DIMENSION

