

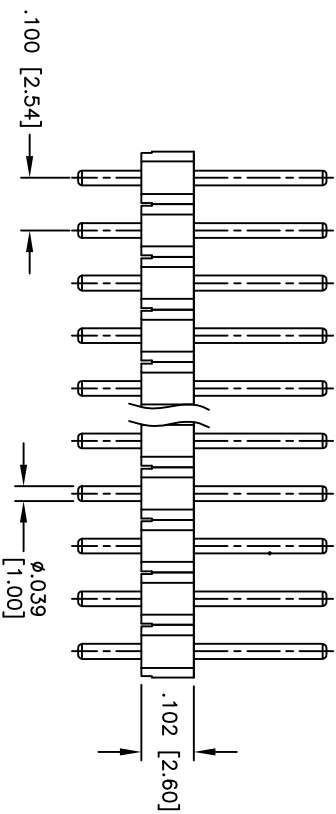
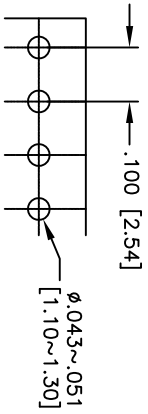


Rev	AWO #	Description	Date	Appr
-	11228	RELEASED	5/22/11	

APPROVED: _____
 DATE: _____ TITLE: _____

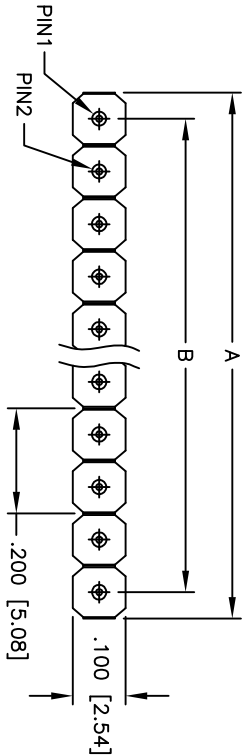

A = .100 [2.54] x No. of Positions per Row
 B = .100 [2.54] x No. of Spaces per Row

SPECIFICATIONS:

Material: Insulator: PPS, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating: Gold flash over Nickel underplate overall
 Electrical: Operating rating: 60V
 Current rating: 3 Amp max
 Insulation resistance: 1,000 Mohms min @ 100 VAC
 Temperature Rating: Temperature Operating: -55°C to +125°C
 Environmental: Lead free, RoHS compliant
 Recommended soldering temp: 235°C for 5 seconds



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: SCREW MACHINE TERMINAL STRIP SINGLE ROW
 STRAIGHT, .100" SPACING, GOLD PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES		HOLE SIZE	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010
APPROVALS	DATE	DATE	
DRAWN	DY	5/22/11	
CHECKED			
APPROVED			
SIZE	PART NO.	REV.	
X	MCT-1-XX-1-G-A11228-2		
REF:	S00007	SCALE:	NTS
SHEET 1 OF 1			