




## Thyristor/Diode Modules

**V<sub>RRM</sub> / V<sub>DRM</sub>** 800 to 1600V  
**I<sub>FAV</sub> / I<sub>TAV</sub>** 160Amp

### Applications

- Power Converters
- Lighting Control
- DC Motor Control and Drives
- Heat and temperature control

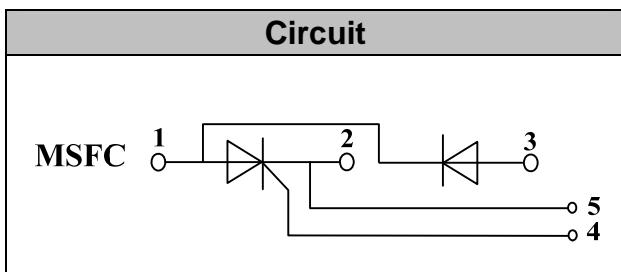

### Features

- International standard package
- High Surge Capability
- Glass passivated chip
- Simple Mounting
- Heat transfer through aluminum oxide DBCceramic isolated metal baseplate
- UL E243882 approved

### Module Type

| TYPE       | V <sub>RRM/V<sub>DRM</sub></sub> | V <sub>RSM</sub> |
|------------|----------------------------------|------------------|
| MSFC160-08 | 800V                             | 900V             |
| MSFC160-12 | 1200V                            | 1300V            |
| MSFC160-16 | 1600V                            | 1700V            |

### ◆Diode

### Maximum Ratings

| Symbol            | Item                               | Conditions                   | Values      | Units            |
|-------------------|------------------------------------|------------------------------|-------------|------------------|
| I <sub>D</sub>    | Output Current(D.C.)               | T <sub>c</sub> =85°C         | 160         | A                |
| I <sub>FSM</sub>  | Surge forward current              | t=10mS T <sub>vj</sub> =45°C | 5400        | A                |
| i <sup>2</sup> t  | Circuit Fusing Consideration       |                              | 145000      | A <sup>2</sup> s |
| V <sub>Isol</sub> | Isolation Breakdown Voltage(R.M.S) | a.c.50HZ;r.m.s.;1min         | 3000        | V                |
| T <sub>vj</sub>   | Operating Junction Temperature     |                              | -40 to +125 | °C               |
| T <sub>stg</sub>  | Storage Temperature                |                              | -40 to +125 | °C               |
| M <sub>t</sub>    | Mounting Torque                    | To terminals(M6)             | 3±15%       | Nm               |
| M <sub>s</sub>    |                                    | To heatsink(M6)              | 5±15%       | Nm               |
| Weight            | Module (Approximately)             |                              | 165         | g                |

### Thermal Characteristics

| Symbol               | Item                    | Conditions       | Values | Units |
|----------------------|-------------------------|------------------|--------|-------|
| R <sub>th(j-c)</sub> | Thermal Impedance, max. | Junction to Case | 0.085  | °C/W  |
| R <sub>th(c-s)</sub> | Thermal Impedance, max. | Case to Heatsink | 0.05   | °C/W  |

### Electrical Characteristics

| Symbol           | Item                                  | Conditions  | Values     |      |      | Units    |
|------------------|---------------------------------------|---|------------|------|------|----------|
|                  |                                       |   | Min.       | Typ. | Max. |          |
| V <sub>FM</sub>  | Forward Voltage Drop, max.            | T=25°C I <sub>F</sub> =500A   |            |      | 1.70 | V        |
| I <sub>RRM</sub> | Repetitive Peak Reverse Current, max. | T <sub>vj</sub> =25°C V <sub>RD</sub> =V <sub>RRM</sub><br>T <sub>vj</sub> =125°C V <sub>RD</sub> =V <sub>RRM</sub> | ≤0.5<br>≤9 |      |      | mA<br>mA |

**◆Thyristor**
**Maximum Ratings**

| Symbol           | Item   | Conditions   | Values           | Units            |
|------------------|--|--|------------------|------------------|
| I <sub>TAV</sub> | Average On-State Current                         | Sine 180°; T <sub>c</sub> =85°C  | 160              | A                |
| I <sub>TSM</sub> | Surge On-State Current                           | T <sub>VJ</sub> =45°C t=10ms, sine<br>T <sub>VJ</sub> =125°C t=10ms, sine                            | 5400<br>5000     | A                |
| i <sup>2</sup> t | Circuit Fusing Consideration                     | T <sub>VJ</sub> =45°C t=10ms, sine<br>T <sub>VJ</sub> =125°C t=10ms, sine                            | 145000<br>125000 | A2s              |
| Visol            | Isolation Breakdown Voltage(R.M.S)               | a.c.50HZ;r.m.s.;1min   | 3000             | V                |
| T <sub>VJ</sub>  | Operating Junction Temperature                   |  | -40 to +130      | °C               |
| T <sub>STG</sub> | Storage Temperature                              |  | -40 to +125      | °C               |
| M <sub>T</sub>   | Mounting Torque                                  | To terminals(M6)   | 3±15%            | Nm               |
| M <sub>S</sub>   |  | To heatsink(M6)  | 5±15%            | Nm               |
| di/dt            | Critical Rate of Rise of On-State Current        | T <sub>VJ</sub> = T <sub>VJM</sub> , 2/3V <sub>DRM</sub> , I <sub>G</sub> =500mA<br>Tr<0.5us, tp>6us | 200              | A/us             |
| dv/dt            | Critical Rate of Rise of Off-State Voltage, min. | T <sub>J</sub> =T <sub>VJM</sub> , 2/3V <sub>DRM</sub> linear voltage rise                           | 1000             | V/us             |
| a                | Maximum allowable acceleration                   |  | 50               | m/s <sup>2</sup> |


**Thermal Characteristics**

| Symbol               | Item                    | Conditions       | Values | Units |
|----------------------|-------------------------|------------------|--------|-------|
| R <sub>th(j-c)</sub> | Thermal Impedance, max. | Junction to Case | 0.17   | °C/W  |
| R <sub>th(c-s)</sub> | Thermal Impedance, max. | Case to Heatsink | 0.10   | °C/W  |


**Electrical Characteristics**

| Symbol                             | Item  | Conditions  | Values |      |      | Units |
|------------------------------------|---|---|--------|------|------|-------|
|                                    |   |   | Min.   | Typ. | Max. |       |
| V <sub>TM</sub>                    | Peak On-State Voltage, max.   | T=25°C I <sub>T</sub> =500A   |        |      | 1.70 | V     |
| I <sub>RRM</sub> /I <sub>DRM</sub> | Repetitive Peak Reverse Current, max. / Repetitive Peak Off-State Current, max. | T <sub>VJ</sub> =T <sub>VJM</sub> , V <sub>R</sub> =V <sub>RRM</sub> , V <sub>D</sub> =V <sub>DRM</sub> |        |      | 40   | mA    |
| V <sub>TO</sub>                    | On state threshold voltage  | For power-loss calculations only (T <sub>VJ</sub> =125°C)   |        |      | 0.85 | V     |
| r <sub>T</sub>                     | Value of on-state slope resistance, max   | T <sub>VJ</sub> =T <sub>VJM</sub>   |        |      | 1.5  | mΩ    |
| V <sub>GT</sub>                    | Gate Trigger Voltage, max.  | T <sub>VJ</sub> =25°C, V <sub>D</sub> =6V   |        |      | 3    | V     |
| I <sub>GT</sub>                    | Gate Trigger Current, max.  | T <sub>VJ</sub> =25°C, V <sub>D</sub> =6V   |        |      | 150  | mA    |
| V <sub>GD</sub>                    | Non-triggering gate voltage, max.   | T <sub>VJ</sub> =125°C, V <sub>D</sub> =2/3V <sub>DRM</sub>   |        |      | 0.25 | V     |
| I <sub>GD</sub>                    | Non-triggering gate current, max.   | T <sub>VJ</sub> =125°C, V <sub>D</sub> =2/3V <sub>DRM</sub>   |        |      | 10   | mA    |
| I <sub>L</sub>                     | Latching current, max.  | T <sub>VJ</sub> =25°C, R <sub>G</sub> =33 Ω   |        | 300  | 1000 | mA    |
| I <sub>H</sub>                     | Holding current, max.   | T <sub>VJ</sub> =25°C, V <sub>D</sub> =6V   | 150    | 400  |      | mA    |
| t <sub>gd</sub>                    | Gate controlled delay time  | TVJ=25°C, IG=1A, dIG/dt=1A/us   | 1      |      |      | us    |
| t <sub>q</sub>                     | Circuit commutated turn-off time  | T <sub>VJ</sub> =T <sub>VJM</sub>   | 100    |      |      | us    |


## Performance Curves

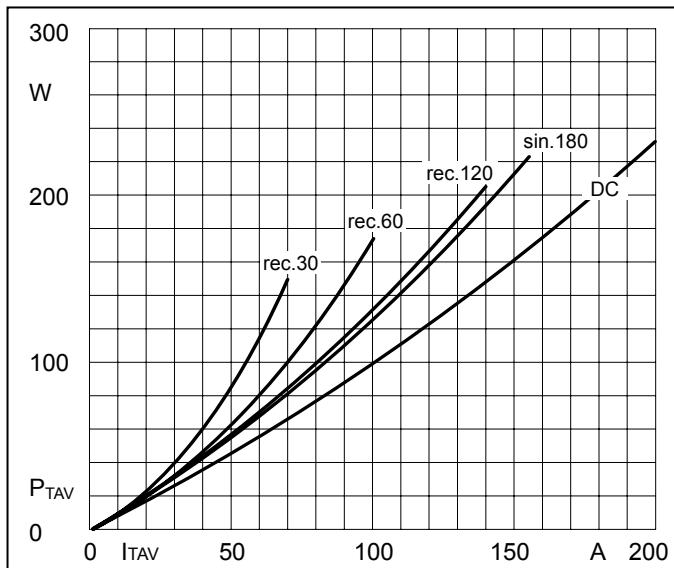


**Fig1. Power dissipation**

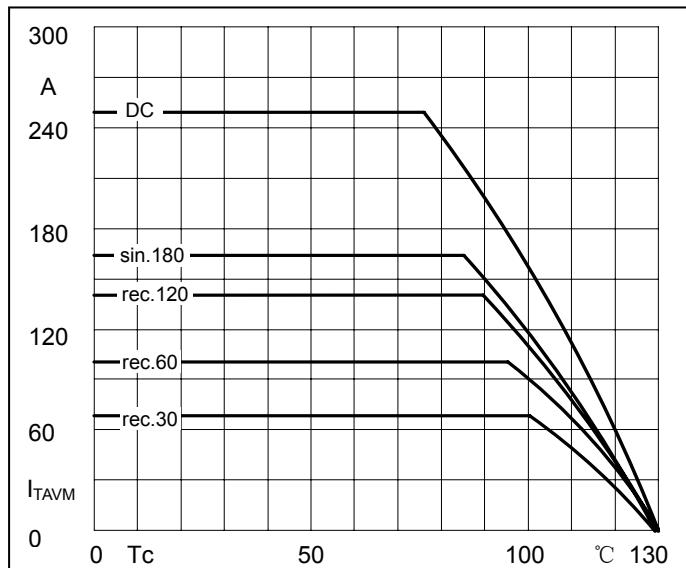


**Fig2. Forward Current Derating Curve**

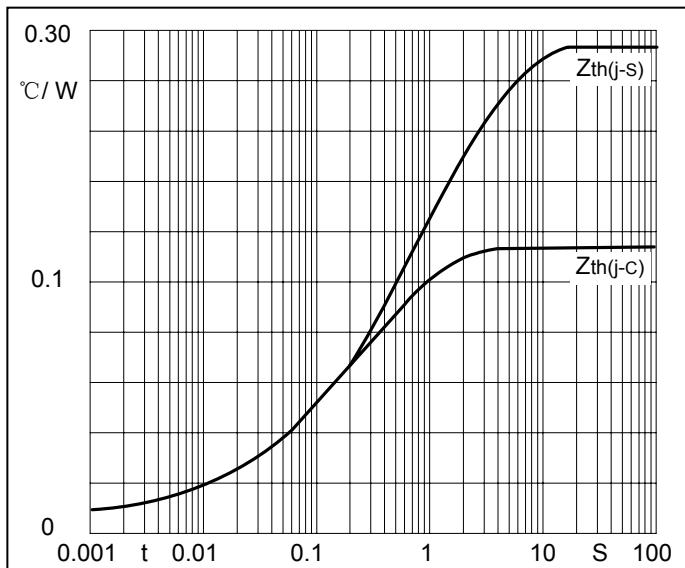


**Fig3. Transient thermal impedance**

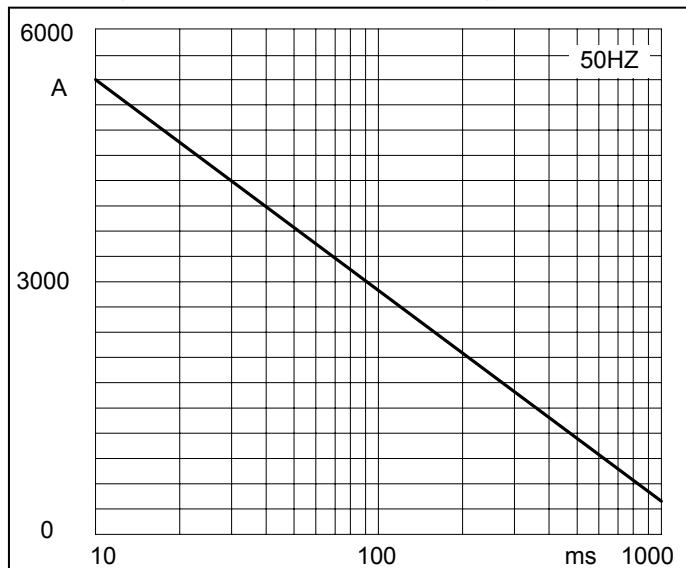

**Fig4. Max Non-Repetitive Forward Surge Current**

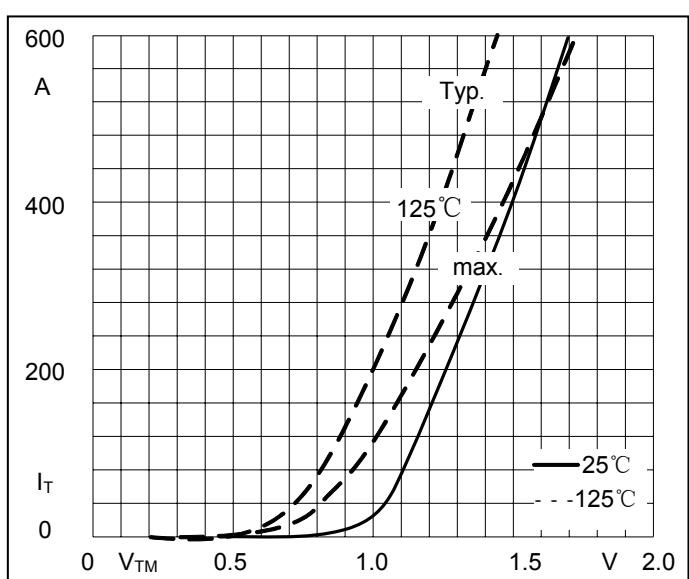


**Fig5. Forward Characteristics**

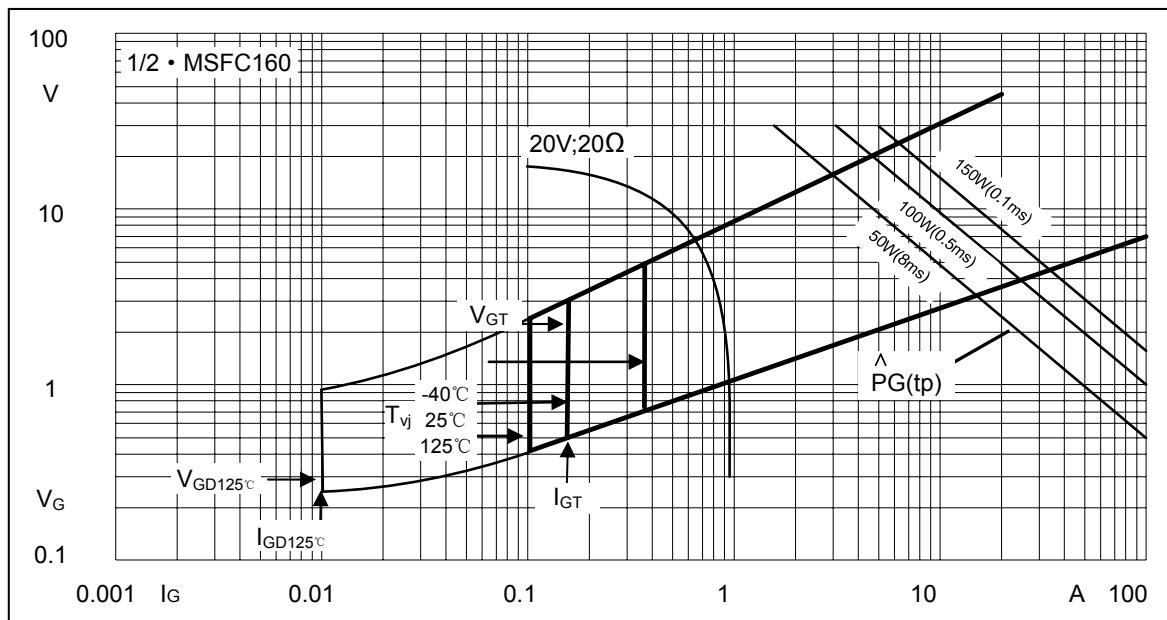

**Fig6. Gate trigger Characteristics**

### Package Outline Information

#### CASE: F2

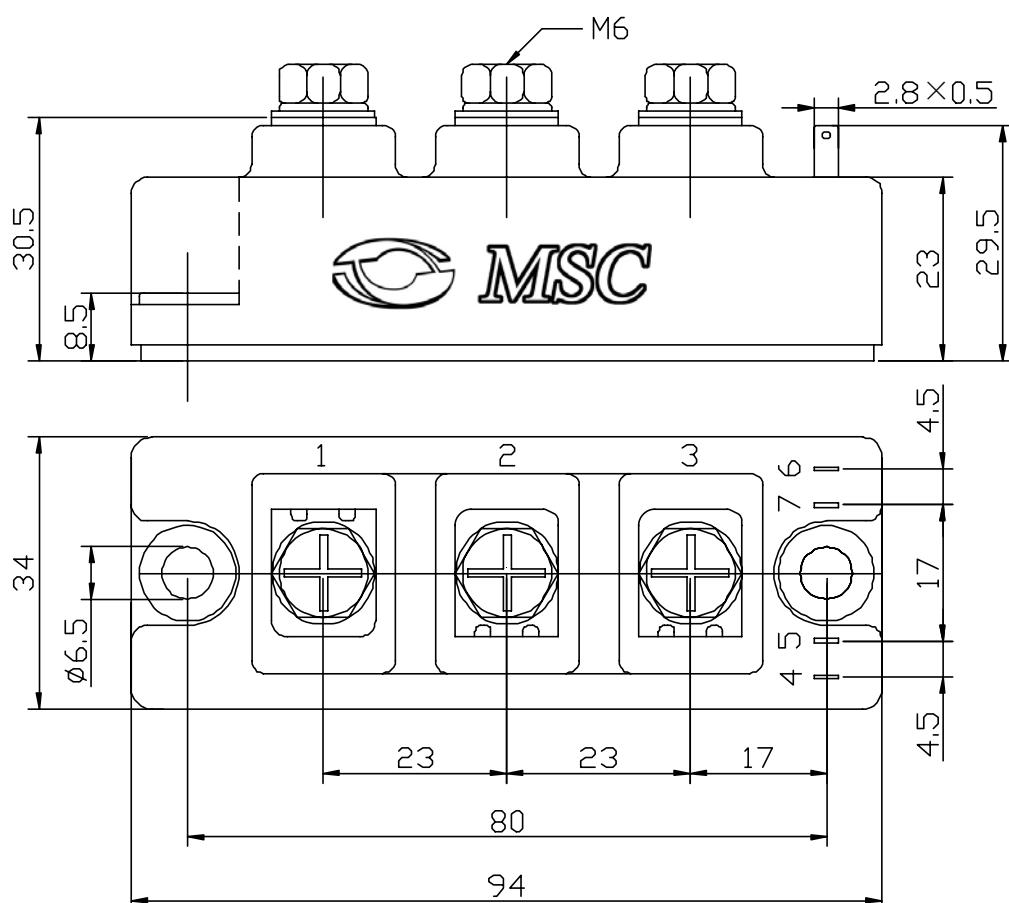

**Dimensions in mm**