


**MATERIALS**

<b>CONNECTORS</b>	<b>BRASS NICKEL PLATED</b>
<b>CONTACT</b>	<b>GOLD PLATED</b>
<b>INSULATOR</b>	<b>PTFE</b>
<b>HEAT SINK</b>	<b>ANODIZED ALUMINUM</b>

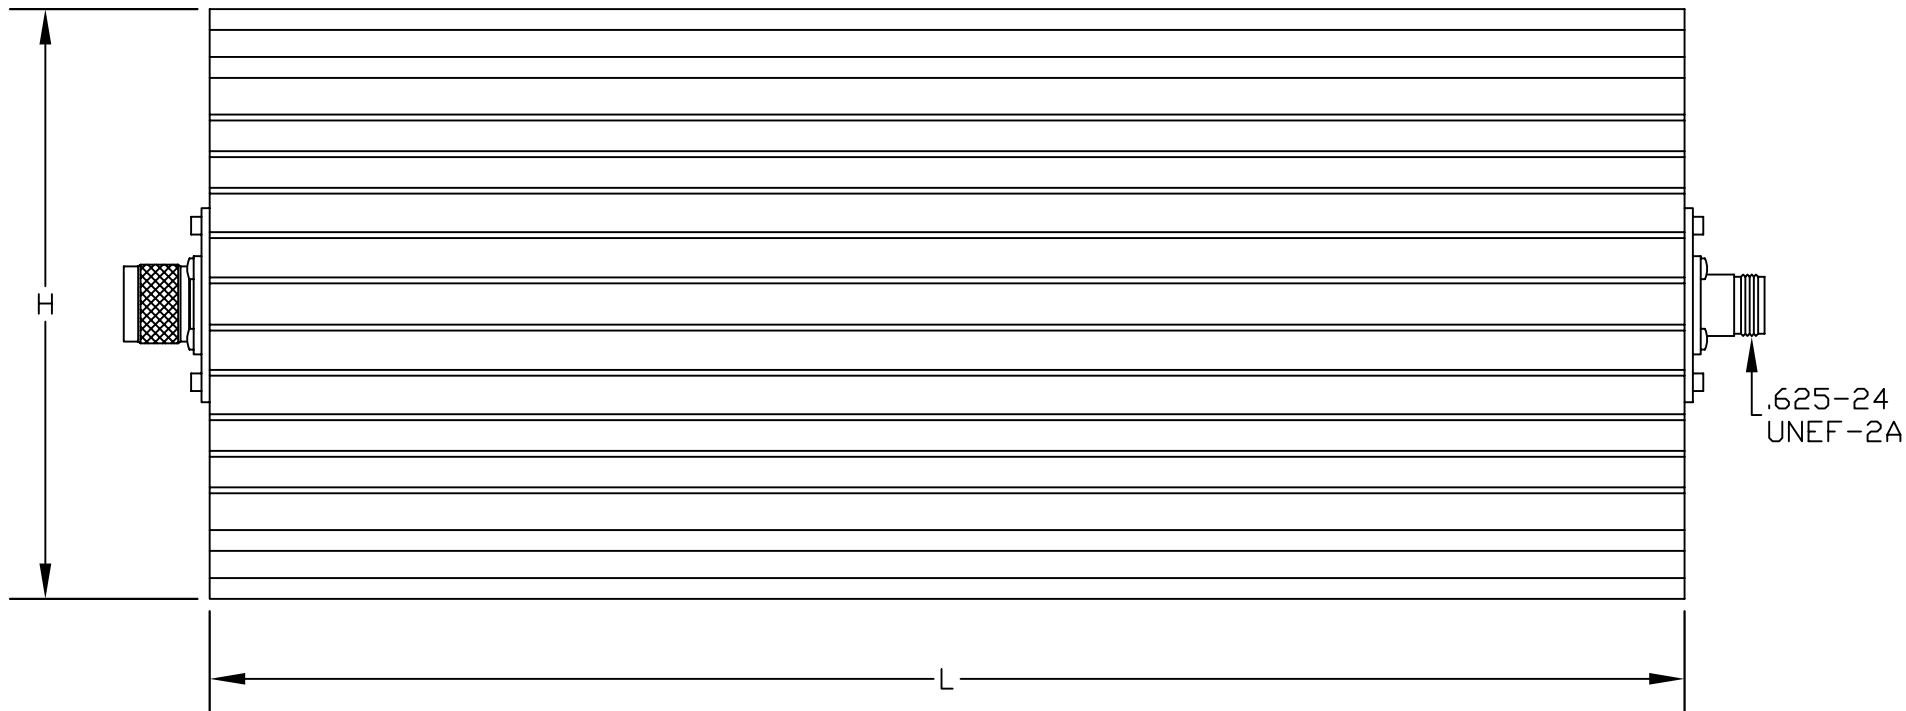

HEAT SINK

LENGTH = 15.000  
 HEIGHT = 6.000  
 WIDTH = 6.750

SPECIFICATIONS

FREQUENCY RANGE: DC TO 500 MHZ  
 ATTENUATION: 30 dB  
 IMPEDANCE: 50 OHMS  
 ACCURACY: ±.5 dB  
 VSWR: 1.15:1 MAXIMUM  
 RF INPUT POWER: 500 WATT AVERAGE AT 25°C  
 DERATED TO 250 WATTS AT 100°C



**PASTERNACK ENTERPRISES, INC.**

P.O BOX 16759, IRVINE, CA 92623  
 PHONE (949) 261-1920 FAX (949) 261-7451

WEB ADDRESS: [www.pasternack.com](http://www.pasternack.com)  
 E-MAIL ADDRESS: [sales@pasternack.com](mailto:sales@pasternack.com)

**COAXIAL & FIBER OPTICS**

DWG TITLE  
**PE7032-30**

DES. N ATTENUATOR MALE TO FEMALE 500 WATT,  
 FREQUENCY RANGE: DC TO 500 MHZ

SIZE A	FSCM NO. 53919	CAD FILE 073002	SCALE N/A	127
--------	----------------	-----------------	-----------	-----

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.