

RoHS Compliant Product
A suffix of "C" specifies halogen & lead-free

DESCRIPTION

These miniature surface mount MOSFETs utilize a high cell density trench process to provide low $R_{DS(on)}$ and to ensure minimal power loss and heat dissipation.

FEATURES


- Low $R_{DS(on)}$ provides higher efficiency and extends battery life.
- Low thermal impedance copper leadframe SOP-8PP saves board space.
- Fast switching speed.
- High performance trench technology.

APPLICATION

DC-DC converters and power management in portable and battery-powered products such as computers, printers, PCMCIA cards, cellular and cordless telephones

PACKAGE INFORMATION

Package	MPQ	Leader Size
SOP-8PP	3K	13' inch

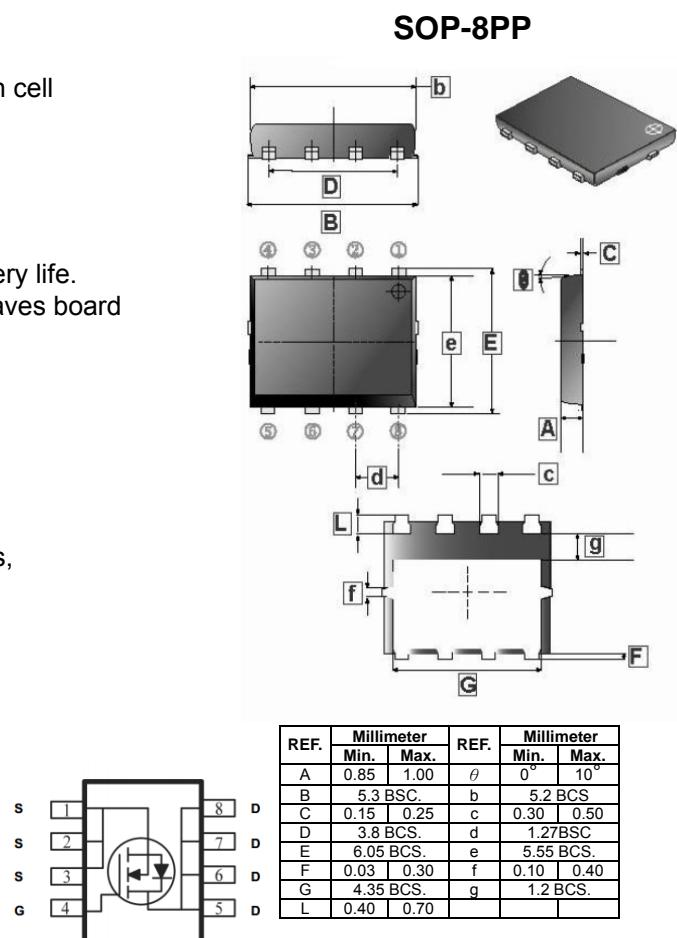

ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DS}	200	V
Gate-Source Voltage	V_{GS}	20	V
Continuous Drain Current ¹	I_D	3	A
		2.4	
Pulsed Drain Current ²	I_{DM}	50	A
Continuous Source Current (Diode Conduction) ¹	I_S	2.3	A
Power Dissipation ¹	P_D	5.0	W
		3.2	
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 ~ 150	°C
Thermal Resistance Rating			
Maximum Junction to Ambient ¹	$t \leq 10 \text{ sec}$	$R_{\theta JA}$	25
			°C / W
	Steady State		65

Notes

1. Surface Mounted on 1" x 1" FR4 Board.
2. Pulse width limited by maximum junction temperature.

ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Static						
Gate-Threshold Voltage	$V_{GS(\text{th})}$	1	-	-	V	$V_{DS} = V_{GS}$, $I_D = 250\mu\text{A}$
Gate-Body Leakage	I_{GSS}	-	-	± 100	nA	$V_{DS} = 0\text{V}$, $V_{GS} = 12\text{V}$
Zero Gate Voltage Drain Current	I_{DSS}	-	-	1	μA	$V_{DS} = 160\text{V}$, $V_{GS} = 0\text{V}$
		-	-	5		$V_{DS} = 160\text{V}$, $V_{GS} = 0\text{V}$, $T_J = 55^\circ\text{C}$
On-State Drain Current ¹	$I_{D(\text{ON})}$	40	-	-	A	$V_{DS} = 5\text{V}$, $V_{GS} = 10\text{V}$
Drain-Source On-Resistance ¹	$R_{DS(\text{ON})}$	-	-	400	$\text{m}\Omega$	$V_{GS} = 10\text{V}$, $I_D = 3\text{A}$
		-	-	450		$V_{GS} = 4.5\text{V}$, $I_D = 2.8\text{A}$
Forward Transconductance ¹	g_{FS}	-	40	-	S	$V_{DS} = 15\text{V}$, $I_D = 3\text{A}$
Diode Forward Voltage	V_{SD}	-	0.7	-	V	$I_S = 2.3\text{A}$, $V_{GS} = 0\text{V}$
Dynamic ²						
Total Gate Charge	Q_g	-	15	-	nC	$I_D = 6\text{A}$ $V_{DS} = 15\text{V}$ $V_{GS} = 4.5\text{V}$
Gate-Source Charge	Q_{gs}	-	3	-		
Gate-Drain Charge	Q_{gd}	-	5	-		
Turn-On Delay Time	$T_{d(\text{ON})}$	-	15	-	nS	$I_D = 1\text{A}$, $V_{DD} = 15\text{V}$ $V_{GEN} = 10\text{V}$ $R_L = 6\Omega$
Rise Time	T_r	-	10	-		
Turn-Off Delay Time	$T_{d(\text{OFF})}$	-	54	-		
Fall Time	T_f	-	26	-		

Notes

1. Pulse test : PW \leq 300 us duty cycle \leq 2%.
2. Guaranteed by design, not subject to production testing.