

Power Schottky Rectifier - 5Amp 120Volt

Features

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability
- Epitaxial construction

Mechanical data

- Case : Molded plastic
- Epoxy : UL 94V-0 rate flame retardant
- Lead : Axial leads, solderable per MIL-STD-202,method 208 guaranteed
- Polarity : Color band denotes cathode end
- Mounting position : Any
- Weight : 1.2 grams

Maximum ratings and Electrical characteristics

Parameters	SB5120	UNIT
Maximum Recurrent Peak Reverse Voltage	120	V
Maximum RMS Voltage	84	V
Maximum DC Blocking Voltage	120	V
Maximum Average Forward Rectified Current	5	A
Peak Forward Surge Current	100	A
Maximum Instantaneous Forward Voltage at 5A	Tc = 25°C	V
	Tc = 125°C	
Maximum Average Reverse Current at Rated DC Blocking Voltage	Tc = 25°C	mA
	Tc = 125°C	
Typical Junction Capacitance	250	pF
Typical Thermal Resistance	ReJA	°C/W
	ReJC	
Operating and Storage Temperature Range	-50 to +175	°C

March 2011 / Rev.6.6

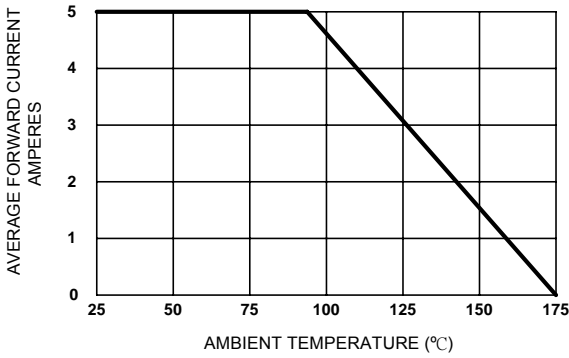


Figure 1. Forward Current Derating Curve

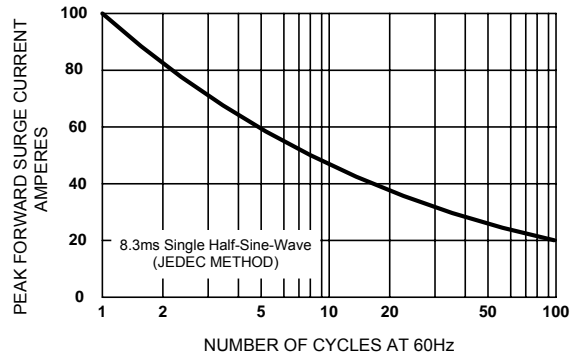


Figure 2. Maximum Non-repetitive Surge Current

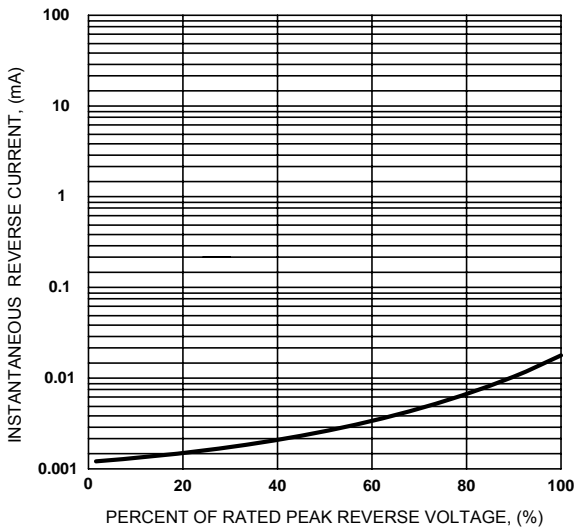


Figure 3. Typical Reverse Characteristics

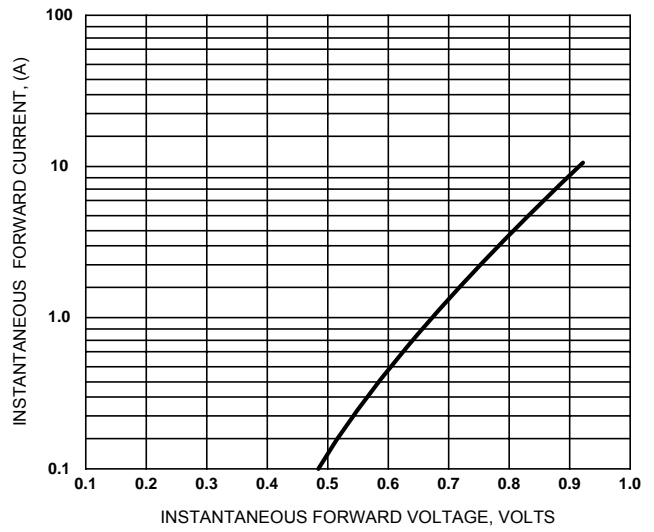


Figure 4. Typical Forward Characteristics

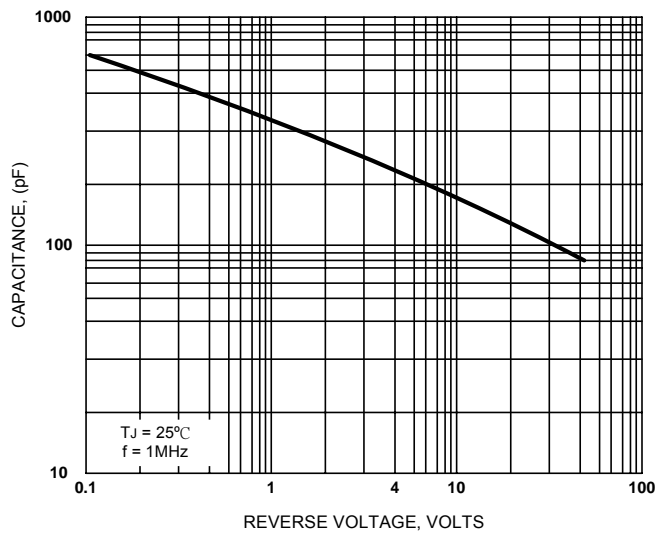


Figure 5. Typical Junction Capacitance

SB5120

D0-27 / D0-201AD

