

part number: description:

50-00010

Connector, dc plug, 5.5x2.1xBL7.5xL30 locking style, brass nickel plated, threaded nut

5/16-32

date: May 19, 2009

rev: A page: 1 of 2


Materials:

	1	POM, black	
:	2	brass, nickel-plated, 2um min.	
:	3	brass, nickel-plated, 2um min.	

Notes:

RoHS compliant

Mechanical drawing:

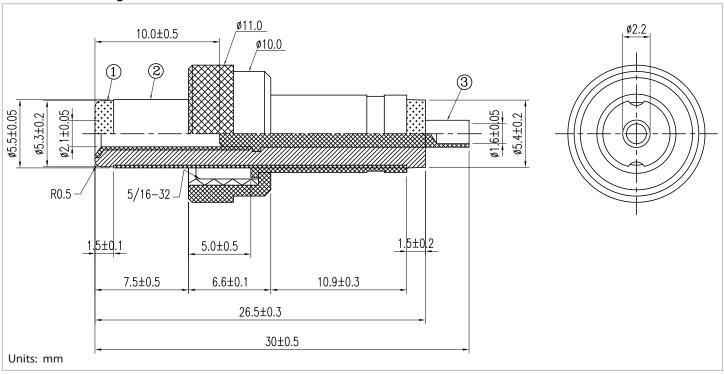

tolerance X: $\pm 0.5 \, \text{mm}$.X: $\pm 0.3 \, \text{mm}$.XX: $\pm 0.05 \, \text{mm}$ applicable unless otherwise indicated in specification or on drawings

Initial Date



part number:

50-00010

Connector, dc plug, 5.5x2.1xBL7.5xL30 locking style, brass nickel plated, threaded nut

5/16-32

date: May 19, 2009

rev: Α page: 2 of 2

_		•	_
KΑ	/ISI	inn.	notes:

Rev	Date	Description
Α	May 19, 2009	initial release

Specification Approval

Spec sign-off verifies that you have reviewed the entire specification, tested a sample of the product, and confirm that it meets your requirements. This specification reflects the part as it will be ordered. Orders will not be processed until the specification pages have been initialed and the approval page has been signed. This specification is confidential and is not to be transmitted without prior approval from Tensility.

Signature	Title ————
Name	Date
Company	Branch