

LD-070

7" Industrial Open Frame LCD Monitor

Features

- Flexible, low cost and high performance
- For industrial, kiosk, ticketing, vending application
- 7" WSVGA TFT LCD display

Specifications

LCD panel	Size	7" (16:9.375)	
	Backlight	LED (50K hrs)	
	Panel type	TN	
	Pixel pitch	0.15x0.15 mm	
	Active area	153.6x90 mm	
	Brightness *	500 cd/m2 max.	
	Contrast	800 : 1	
	Viewing angle	160 / 160 degree	
	Resolution	1024 x 600	
	Display color	16.7M (8 bit)	
	Response time	Tr/Tf=20/10 mS	
	Video	Hor. frequency	30 ~ 50 KHz
		Ver. frequency	60/70 Hz
Pixel rate		65 MHz	

* Different brightness is per customer's request

Signal input	15 pin D-sub connector for VGA	
OSD adjustment	Power, Enter, Left, Right, Auto	
Power	DC connector	2.5mm diameter
	DC input	12 Vdc / 0.6A
	Consumption	7W
	Management	VESA DPMS
Mounting		
Dimension	186.7 (W) x 108 (H) x 34.3 (D) mm	
Net weight		
Package	Packing	24 pcs / carton
	20' container	
	40' container	
Temperature	Operation **	-30 ~ 80 degree C
	Storage	-30 ~ 80 degree C

** Temperature of LCD surface

** Different temperature range is on demand.

Ordering information


■ Model selection

LD-070-XYZ	X: Panel selection	Y: Input selection	Z: Touch selection
0:	Standard, chosen	0: Standard, VGA/DVI	0: Standard, none
A:	Specified LCD	V: VGA only	G: Glass
B:	Specified LCD	H: VGA/DVI/HDMI	R: Resistive
...etc.	Specified LCD	P: DVI/HDMI/DP	C: Surface capacitive
		S: VGA/DVI/S-video	P: Projective capacitive
			I: IR
			S: SAW

■ Optional accessories

- * Power adapter 100 ~ 240 Vac adapter with 12Vdc / 3A o/p
- * Power cord 1.8M power cord, US / EU
- * Signal cable 1.8M VGA cable, 1.8M DVI cable

Product drawing

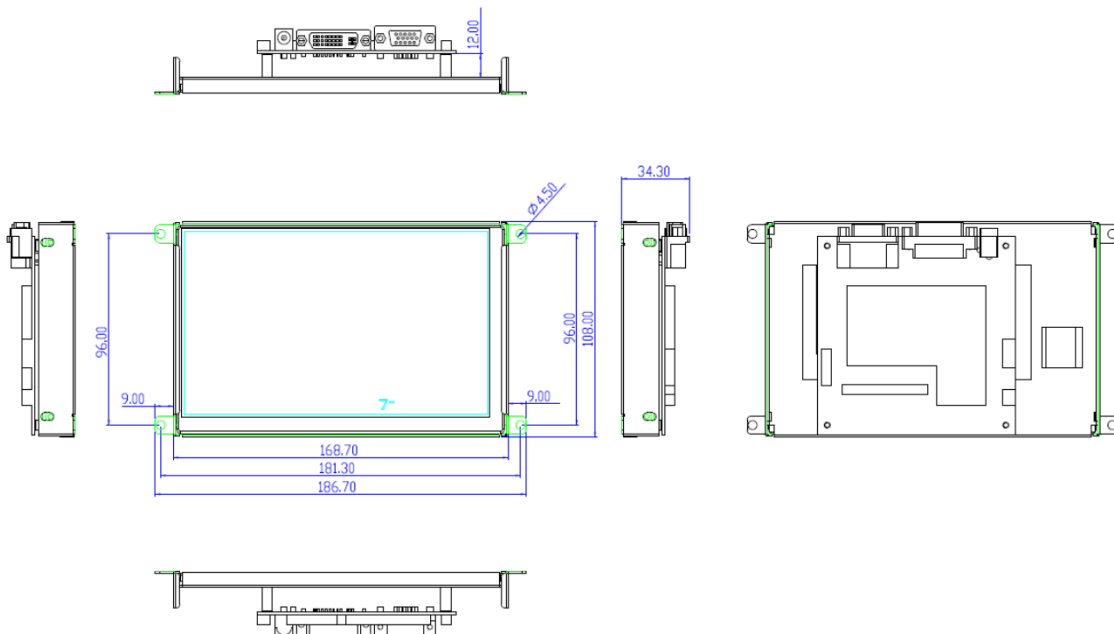

* All specification and photos are subject to change without notice.