



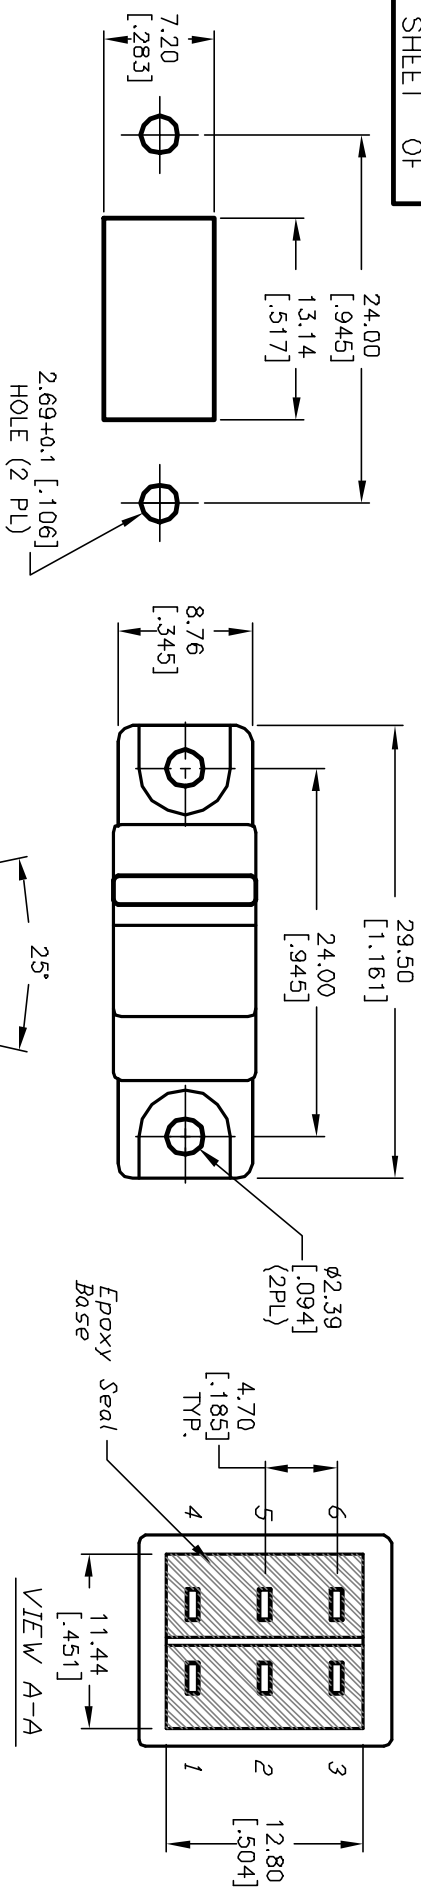

RECOMMENDED PANEL MOUNT




CIRCUIT: 2PDT

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
<DN>	UPP	<DN>
2-3,5-6	OPEN	2-1,5-4

NOTES:

() = Momentary

1. ALL DIMENSIONS IN MM [INCH] 12.60
2. GENERAL TOLERANCE: $X.X = \pm 0.4$ [.496]
3. TERM. NOS. FOR REF. ONLY
4. RATING: 5A @120VAC OR 29VDC
5. MATERIAL: FIXED TERMINAL & MOVING CONTACT
6. CONTACT RESISTANCE: 10mILLI Ohms max initial
Copper Alloy w/SILVER PLATE over Gold flash.
@2-4VDC, 100mA for AG & AU
7. ELECTRICAL LIFE: 30,000 make-and-break
cycles at full load.
8. INSULATION RESISTANCE: 1,000M ohm min.
9. DIELECTRIC STRENGTH: 1000V RMS @sea level
10. OPERATING TEMP.: -30°C to 85°C

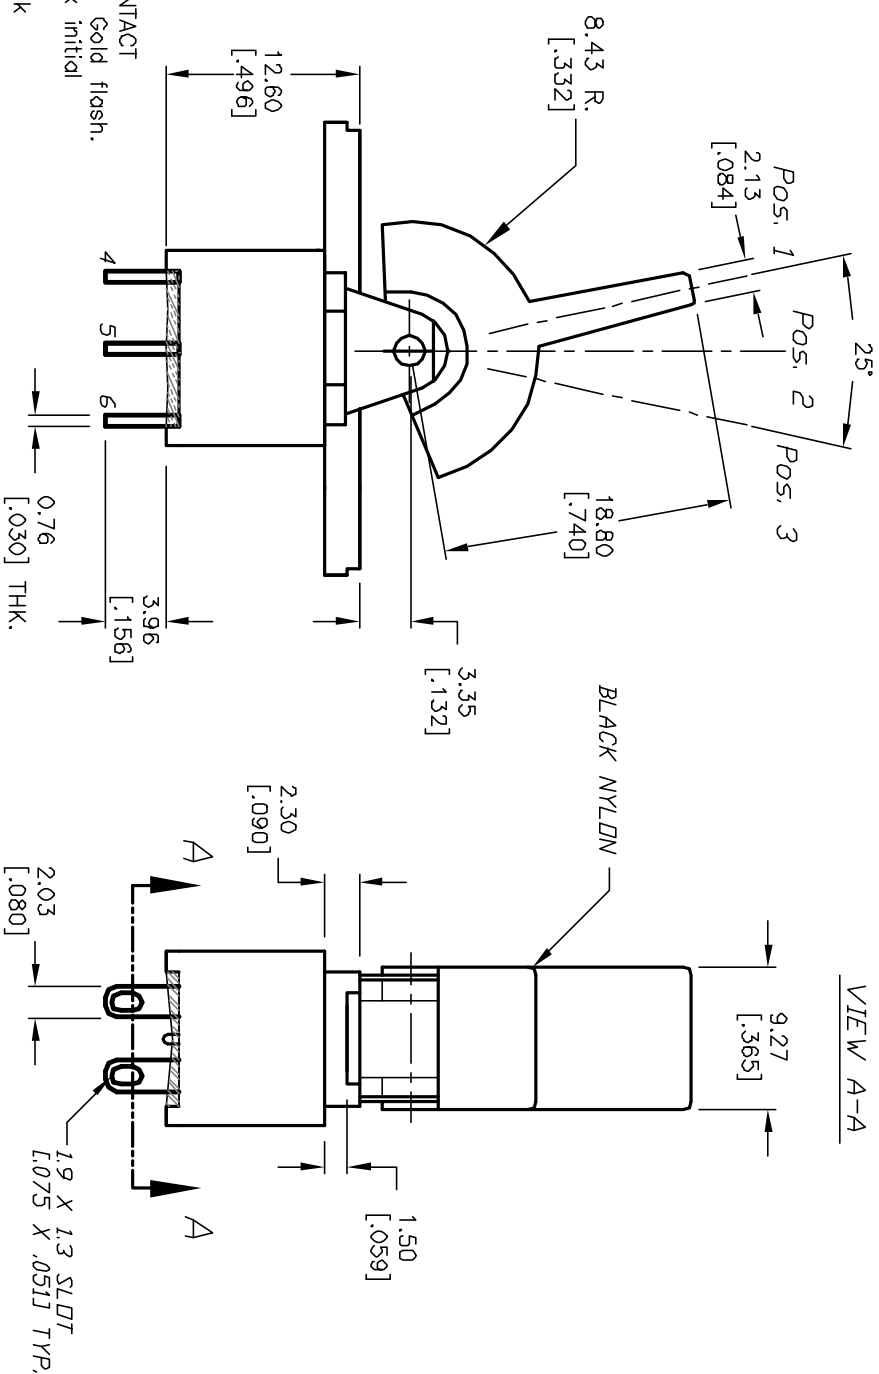

			TITLE	300A WDP-4 R2 BLK M1 Q E		
B	12116	REVISED AND REDRAWN	6/13/02	CB		
REV.	ECN No.	DESCRIPTION	DATE	CHKD		
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED						
			SCALE	DATE	DR	DWG
			2:1	6/13/02	CB	T302111
						REV B