

EFRD-S2657H

1U DC To DC 650W Server Power Supply

Features:

- 48VDC Input
- High Efficiency (Power Module) > 85%
- 650W with ATX Output
- PMBus 1.2 Support
- 0~50°C Working Temperature
- N+1 Redundant Design
- Dimension: 106(W) x 41.2(H) x 355(D) mm



General Specification

- ⦿ Input Range: -40V~-72VDC
- ⦿ Efficiency: ≥85% @ -48VDC
- ⦿ Short Circuit Protection
- ⦿ Over Current Protection
- ⦿ Over Voltage Protection
- ⦿ No load Operation
- ⦿ Over Temperature Protection
- ⦿ MTBF >100,000 Hours@25°C
- ⦿ Operating Temperature: 0 to 50 °C
- ⦿ Operating Humidity: 20 to 90 %
- ⦿ EMI/RFI: CE, FCC class A
- ⦿ Safety: UL, CB, TUV, CCC



Input and Output Characteristics

Input			Output						
Voltage	Frequency	Current	Load	+3.3V	+5V	+12V	-12V	-5V	+5VSB
-40~-72V DC	-	24-12A	Max.Load	24A	24A	53A	0.5A		3A
			Min.Load	0A	0A	1A	0A		0.1A

Note: 1: The +3.3 & +5 Volt total outputs shall not exceed 140W.

2: Noise bandwidth is from DC to 20 MHz.


Ripple and Noise

Output	+3.3V	+5V	+12V	-12V	5Vsb
Load Regulation	±5%	± 5%	± 5%	± 5%	± 5%
Line Regulation	± 1%	± 1%	± 1%	± 1%	± 1%
Ripple & Noise	60mV	60mV	120mV	120mV	60mV

Mechanical

Outline Dimension: 106x41.5x355(mm)

Outline Drawing

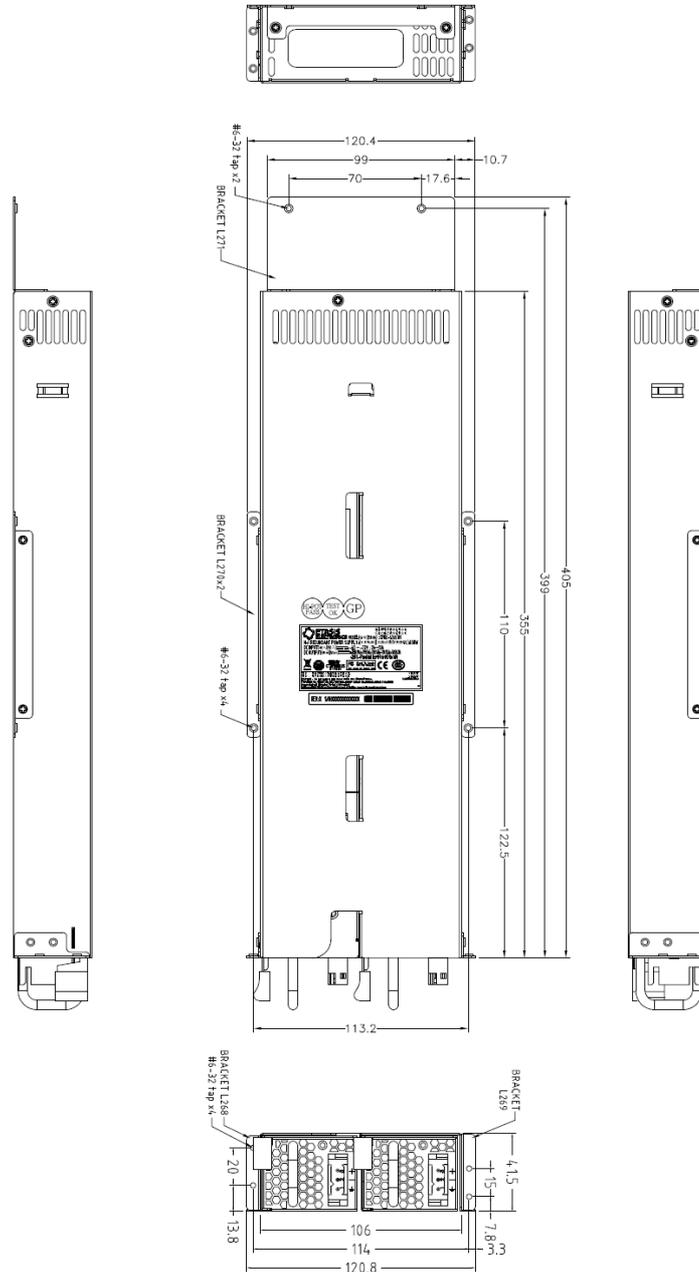

©ETASIS Electronic Corporation. All rights reserved. ETASIS Electronics Corporation reserves the right to make changes to their products, specification, or to discontinue any product and its service at anytime without notice. The information and specification from ETASIS is believed to be accurate and reliable. However, ETASIS assumes no responsibility for any business loss due to specification changes. ETASIS products are not designed to be used in system deemed to be critical, or in any system wherein failure or malfunction could result in injury or death.