
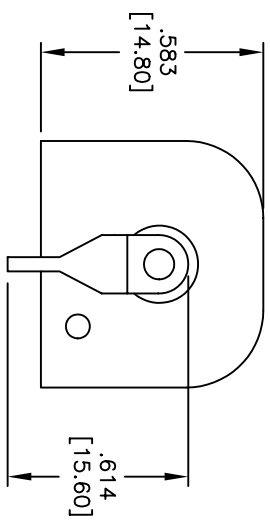
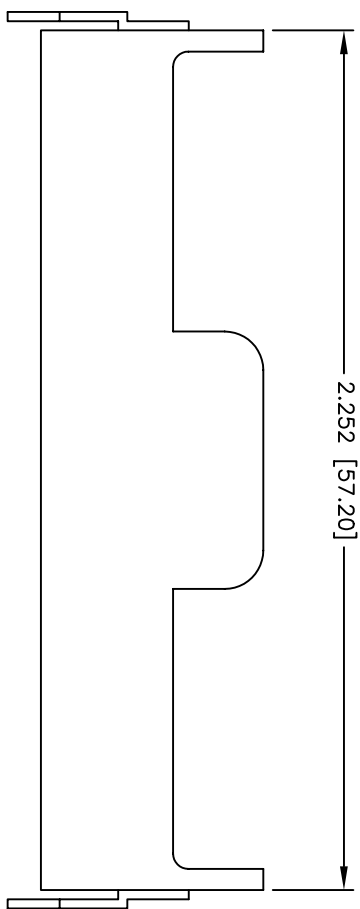
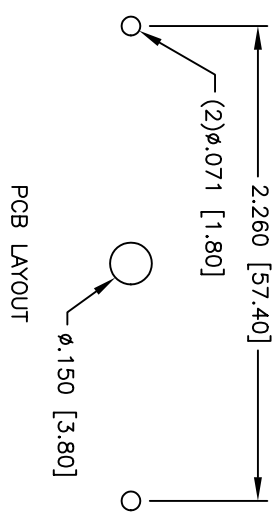


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/13/05	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

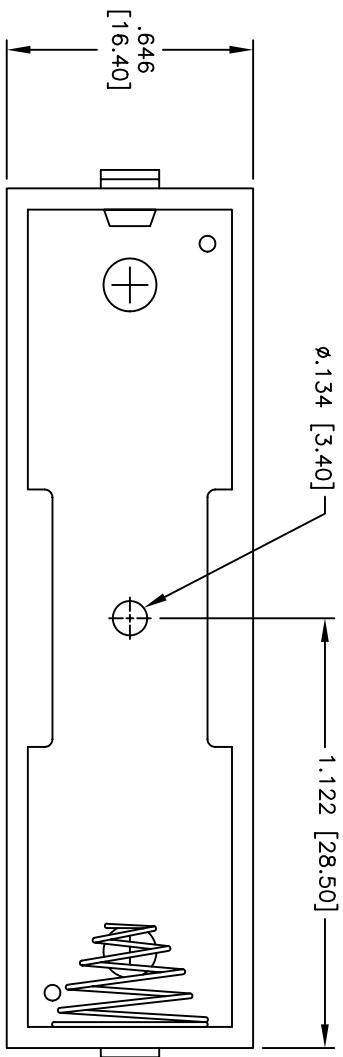

**SPECIFICATIONS:**

Material: Insulator: Impact resistant Polypropylene, rated UL94-HB  
 Insulator color: Black  
 Spring: Steel, Nickel plated  
 Contacts: Steel, Nickel plated  
 Electrical:  
 Operating voltage: 1.5 VDC max.  
 Temperature Rating:  
 Operating temperature: -10°C to +80°C  
 Environmental:  
 Lead free, RoHS compliant  
 Recommended soldering temp: 230°C for 5 seconds



6 5 4 3 2 1

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010

APPROVALS: \_\_\_\_\_ DATE: \_\_\_\_\_

DRAWN	SS	1/13/05
CHECKED		
APPROVED		

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: BATTERY HOLDER, PCB TERMINALS  
 FOR ONE "AA" CELL

SIZE	PART NO.	REV.
X	BH-01-1	-
REF:	SCALE: NTS	SHEET 1 OF 1