


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/11/10	

APPROVED: _____
 DATE: _____ TITLE: _____



SPECIFICATIONS:
Material: Contact Housing: Hi-temp thermoplastic, rated UL 94V-0, color: Black
Contact: Phosphor Bronze
Cage: Copper Alloy
Light pipes: Polycarbonate, rated UL 94V-0, color Clear.
Light pipe Housing: PBT, reinforced glass, rated UL 94V-0, color Black
EMI Clip: Copper Alloy, Nickel plated
Plating: 15u" gold over Nickel underplate on contact area.
Electrical:
Rating Voltage: 120 VAC
Rating Current: 0.5A Max
Contact resistance: 40 milliohms Max initial.
Insulation resistance: 1000 mohms Min.
Dielectric withstanding voltage: 750V AC/Max.
Temperature Rating:
Operating temperature: -55°C to +105°C
Storage temperature: -55°C to +105°C
Environmental:
It meets SFP+
Lead free, RoHS compliant

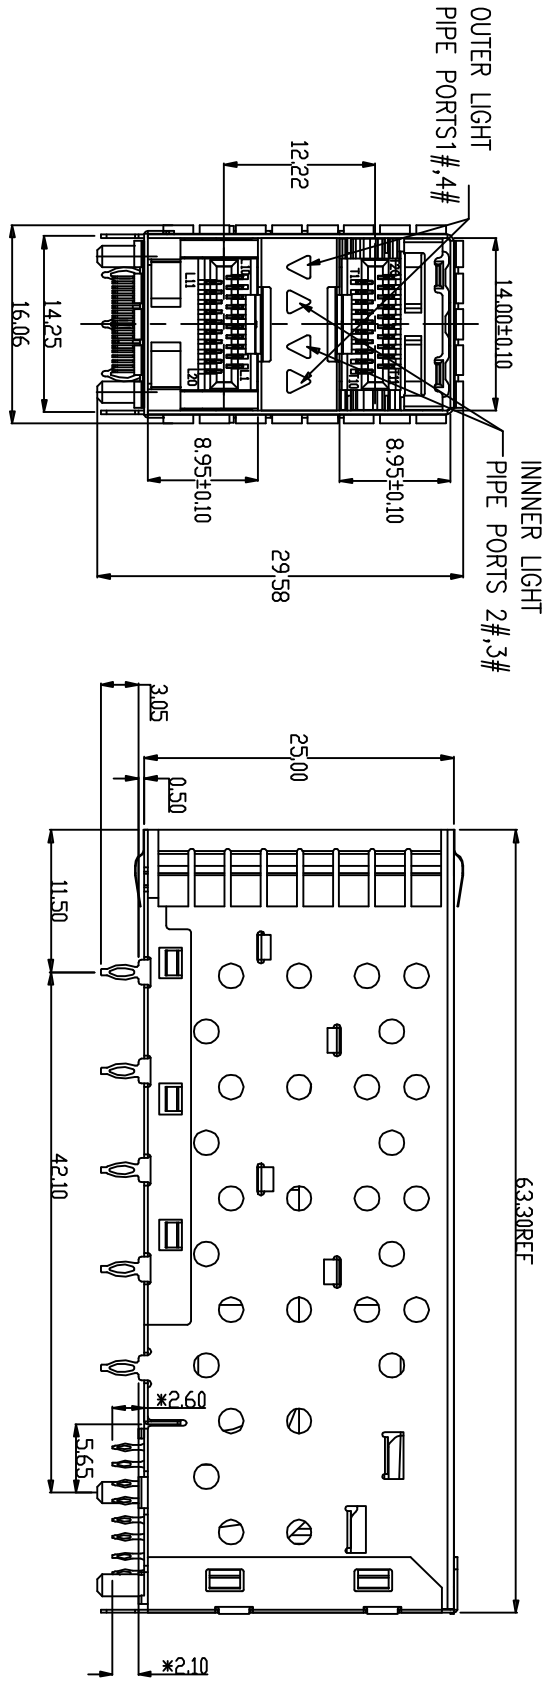

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ±.10	ØX ±.10
.XX ±.020	ØXX ±.015
.XXX ±.015	ØXXX ±.010
APPROVALS	DATE
DRAWN	10/11/10
CHECKED	
APPROVED	

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE		SFP 2X1, W/ INNER & OUTER LIGHT PIPE PORTS	
SIZE	PART NO.	SCALE	REV.
X	SFCJ-2-LP3-EMI	NTS	-
REF:	S00095C	SHEET	1 OF 3

6 5 4 3 2 1