

# 22 Series

RoHS  
Compliant


SELF-LOCKING BALL LOCK HEAD DESIGN  
 PROVIDES A STRONG, DURABLE METHOD OF CABLE BUNDLING  
 CAN BE USED IN A WIDE RANGE OF INDOOR, OUTDOOR  
 AND UNDERGROUND APPLICATIONS

304 STAINLESS STEEL FOR GENERAL PURPOSE APPLICATIONS  
 316 STAINLESS STEEL FOR CORROSIVE ENVIRONMENTS  
 OPERATING TEMPERATURE: -80°C to +538°C  
 APPROVALS<sup>1</sup>: c(UL)us




Part Number	Width mm [Inch]	Length mm [Inch]	Max Bundle Diameter mm [Inch]	Min Loop Tensile Kg [lb]
<b>S - 200lb</b>				
22-S125	4.6 [.180]	125 [5.0]	38.0 [1.49]	90 [200]
22-S150	4.6 [.180]	150 [6.0]	46.0 [1.81]	90 [200]
22-S200	4.6 [.180]	200 [8.0]	61.9 [2.43]	90 [200]
22-S260	4.6 [.180]	260 [10.0]	81.0 [3.19]	90 [200]
22-S290	4.6 [.180]	290 [11.5]	90.6 [3.56]	90 [200]
22-S360	4.6 [.180]	360 [14.0]	112.8 [4.44]	90 [200]
22-S520	4.6 [.180]	520 [20.5]	163.8 [6.45]	90 [200]
22-S680	4.6 [.180]	680 [27.0]	214.8 [8.45]	90 [200]
22-S840	4.6 [.180]	840 [33.0]	265.7 [10.46]	90 [200]
<b>H - 350lb</b>				
22-H200	7.9 [.310]	200 [8.0]	61.9 [2.43]	160 [350]
22-H260	7.9 [.310]	260 [10.0]	81.0 [3.19]	160 [350]
22-H290	7.9 [.310]	290 [11.5]	90.6 [3.56]	160 [350]
22-H360	7.9 [.310]	360 [14.0]	112.8 [4.44]	160 [350]
22-H520	7.9 [.310]	520 [20.5]	163.8 [6.45]	160 [350]
22-H680	7.9 [.310]	680 [27.0]	214.8 [8.45]	160 [350]
22-H840	7.9 [.310]	840 [33.0]	265.7 [10.46]	160 [350]
<b>EH - 500lb</b>				
22-EH290	12 [.485]	290 [11.5]	90.6 [3.56]	235 [500]
22-EH360	12 [.485]	360 [14.0]	112.8 [4.44]	235 [500]
22-EH520	12 [.485]	520 [20.5]	163.8 [6.45]	235 [500]
22-EH680	12 [.485]	680 [27.0]	214.8 [8.45]	235 [500]
22-EH840	12 [.485]	840 [33.0]	265.7 [10.46]	235 [500]

Notes:  
 1. 22-H260, 22-EH290C, 22-EH360C, 22-EH520C, 22-EH680C, 22-EH840C, 22-EH290D, 22-EH360D, 22-EH520D, 22-EH680D, 22-EH840D are not UL approved

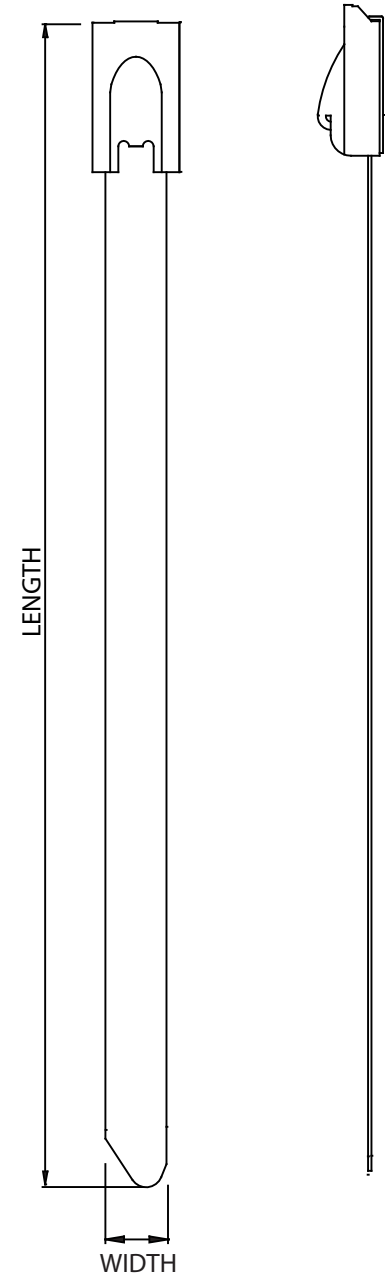

## PART NUMBER SYSTEM



SERIES

CROSS SECTION

LENGTH

MATERIAL/COLOR

A: 304 Stainless Steel	C: 304 Epoxy Coated Stainless Steel
B: 316 Stainless Steel	D: 316 Epoxy Coated Stainless Steel

PACKAGE SIZE

C: 100PCS
Number: Other Quantity