

110.592 MHz SAW Filter

AFS110.592W01-TD01



RoHS
Compliant



11.3 x 4.8 x 3.5 mm

FEATURES:

- Compact size resistance weld sealed package
- No polarity

APPLICATIONS:

- Pager (Double Super)
- Cordless phone

STANDARD SPECIFICATIONS:


Maximum Ratings

Item	Value
Operating Temperature Range	-40°C to +80°C
Storage Temperature Range	-40°C to +85°C
DC Voltage	10V DC max.
Maximum Input Power	0 dBm

Electrical Characteristics

Parameters	Minimum	Typical	Maximum	Units	Notes
Center Frequency (f_0)	-----	110.592	-----	MHz	
3dB Bandwidth (from f_0)	± 576	-----	-----	kHz	
Insertion Loss (at minimum loss point)	-----	-----	4.5	dB	
Stopband Attenuation (from peak level)	50	-----	-----	dB	$f_0 - 3 \times 1.728\text{MHz}$
	44	-----	-----		$f_0 - 2 \times 1.728\text{MHz}$
	31	-----	-----		$f_0 - 1.728\text{MHz}$
	20	-----	-----		$f_0 + 1.728\text{MHz}$
	40	-----	-----		$f_0 + 2 \times 1.728\text{MHz}$
	42	-----	-----		$f_0 + 3 \times 1.728\text{MHz}$
Group Delay Time Deviation (within $f_0 \pm 576\text{kHz}$)	-----	-----	0.75	μs	
Terminating Impedance	-----	200//1.2	-----	$\Omega/\mu\text{H}$	

TEST CIRCUIT

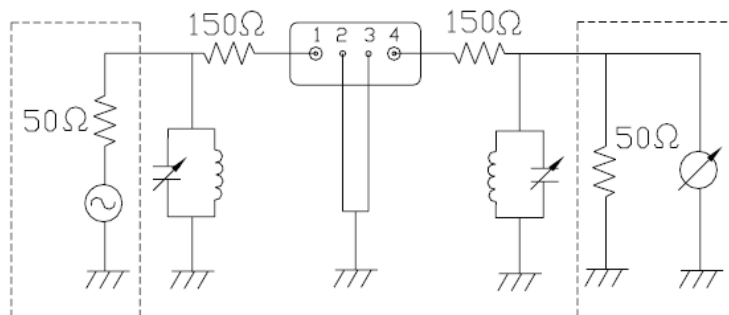

SMD 110.592 MHz SAW Filter

AFS110.592W01-TD01





RoHS
Compliant




11.3 x 4.8 x 3.5 mm

FREQUENCY CHARACTERISTICS:

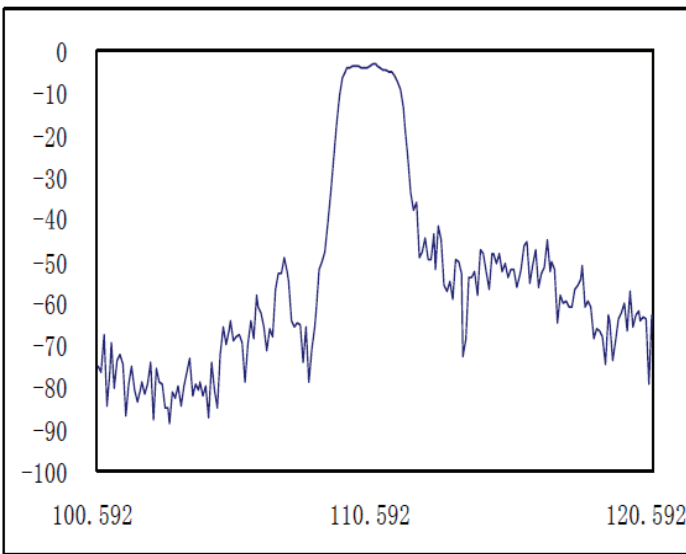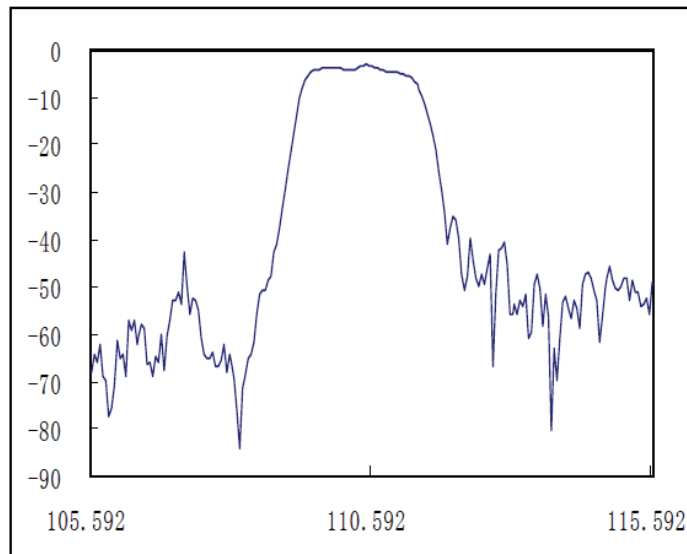

OUTLINE DIMENSIONS:

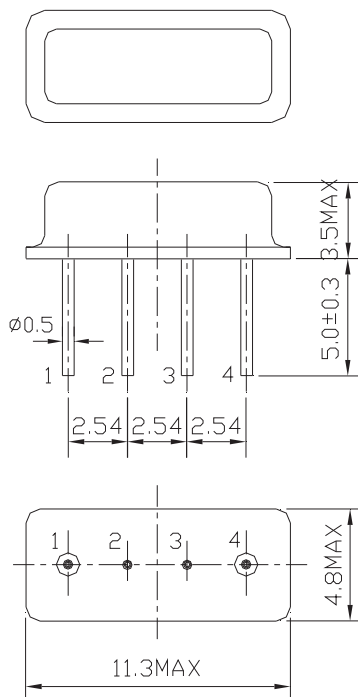

Pin No.	Function
1	Input
4	Output
2, 3	Ground

Dimensions: mm

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.