
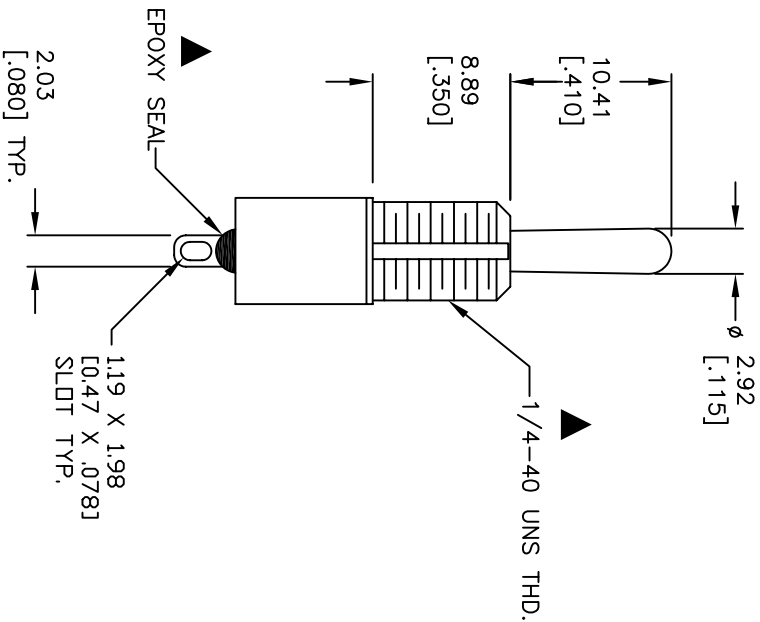
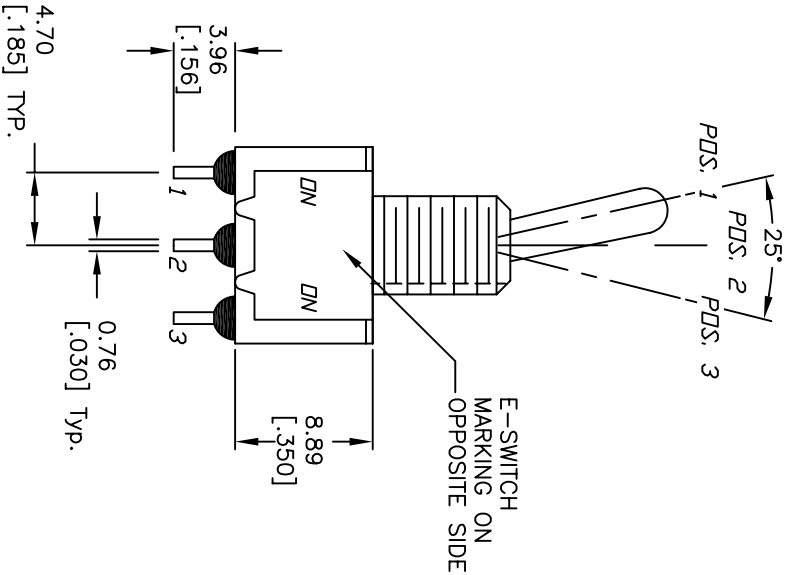


CIRCUIT: SPDT

SWITCH FUNCTION		
PQS. 1	PQS. 2	PQS. 3
DN	NDNE	DN
2-3	OPEN	2-1

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4VA @20V AC or DC
5. FIXED TERMINAL/MOVING CONTACT:
Copper Alloy /w Gold plate over Nickel plate.
6. ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1000V RMS @sea level
9. OPERATING TEMP.: -30°C to 85°C
10. 2002/95/EC (ROHS) COMPLIANT

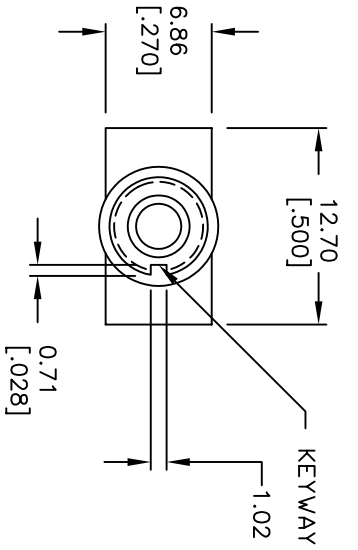

E-SWITCH®

REV.	ECN No.	DESCRIPTION	DATE	CHKD
C	15511	ADD ROHS NOTE	11/8/05	PH
B	12166	REVISED AND REDRAWN	12/26/02	CJB

TITLE	SCALE	DATE	DR	DWG	REV
100 SP-1 T1 B1 M1 R E (GOLD CONTACTS)	2:1	--	--	T111032	C

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED