
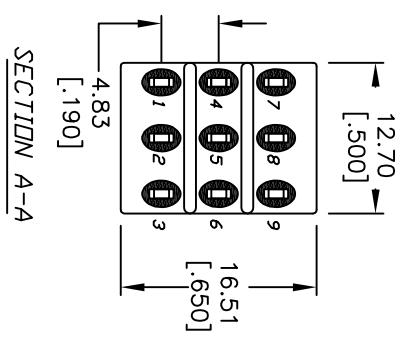
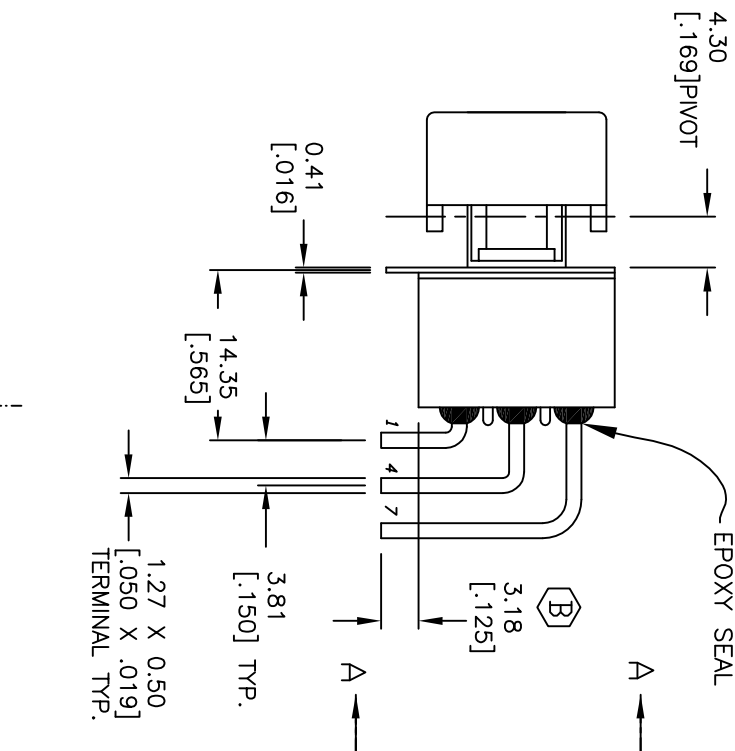



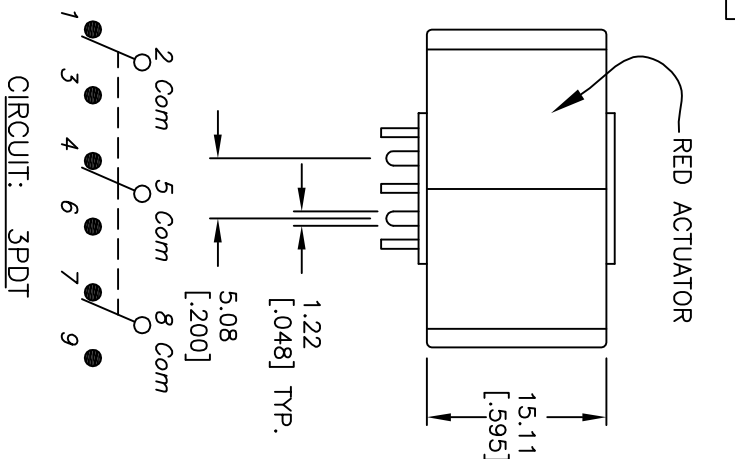


SWITCH FUNCTION			
PDS. 1	PDS. 2	PDS. 3	
DN	NONE	DN	
2-3,5-6,8-9	OPEN	2-1,5-4,8-7	

CIRCUIT: 3PDT

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4;
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 5A @120VAC or 28VDC;
2A @250VAC
5. FIXED TERM/MOVING CONTACT:
COPPER ALLOY W/SILVER PLATE.
6. ELECTRICAL LIFE:
50,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level
9. OPERATION TEMP.: -30°C to +85°C

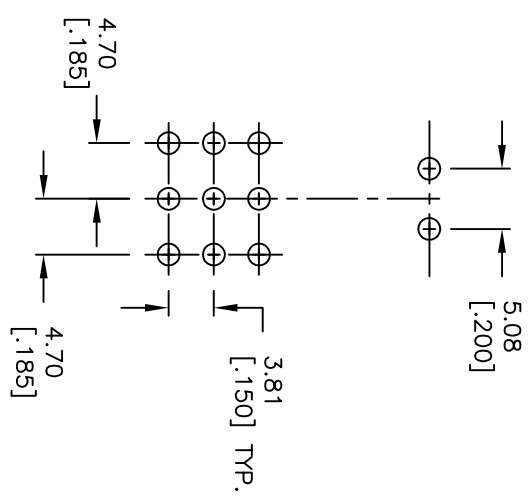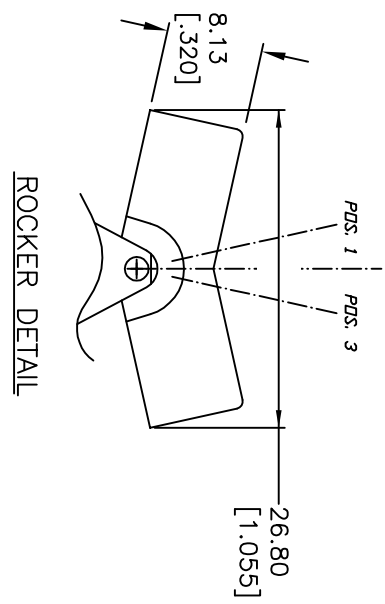

REV. 18507		ADD DIMENSION FOR TERMINAL LENGTH		4/29/09	BLR	TITLE		300 3P1 J3 RED M6 QE	
A 12287		RELEASED FOR PRODUCTION		7/17/02	CJB	SCALE		1.5:1	
REV. ECN NO.		DESCRIPTION		DATE	CHKD	DATE		4/29/09	
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED						DR		BLR	
						DWG		T331026	
						REV		B	