


## Programmable shunt voltage reference

Datasheet - production data

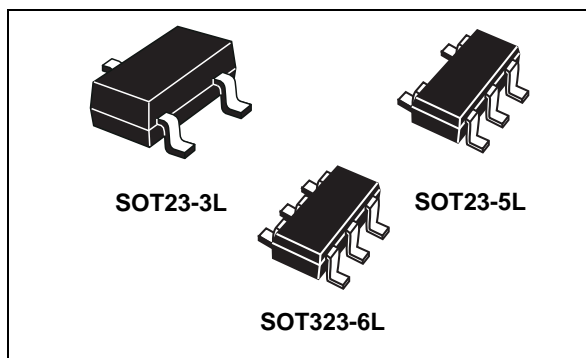

- Battery chargers
- Switch mode power supplies
- Battery operated equipment
- Data acquisition systems
- Energy management

### Description

The TLVH431 is a low power programmable shunt voltage reference, with guaranteed temperature stability over the entire operating temperature range.

The output voltage may be set to any value between 1.24 V and 18 V by means of an external resistor divider.

The TLVH431 operates with a wide current range from 100  $\mu$ A to 60 mA with a typical dynamic impedance of 0.22  $\Omega$ .

Available in SOT23-3L, SOT23-5L and SOT323-6L surface mounted packages, it can be designed in applications where space saving is a critical issue.

The low operating current is a key advantage for power restricted designs.

### Features

- Adjustable output voltage: 1.24 V to 18 V
- Low operating current: 100  $\mu$ A at 25  $^{\circ}$ C
- 0.25%, 0.5% and 1.5% voltage precision
- Sink current capability up to 60 mA
- -40 to +125  $^{\circ}$ C temperature range
- 100 ppm/ $^{\circ}$ C maximum temperature coefficient
- Available in SOT23-3L, SOT23-5L and SOT323-6L packages

### Applications

- Computers

Table 1. Device summary

Part number	Precision	Package	Temperature range
TLVH431AIL3T	0.5%	SOT23-3L	-40 to +125 $^{\circ}$ C
TLVH431BIL3T	0.25%		
TLVH431LIL3T	1.5%		
TLVH431AIL5T	0.5%	SOT23-5L	
TLVH431BIL5T	0.25%		
TLVH431LIL5T	1.5%		
TLVH431AICT	0.5%	SOT323-6L	
TLVH431BICT	0.25%		
TLVH431LICT	1.5%		


---

# Contents

1	Pin configuration .....	3
2	Maximum ratings .....	4
3	Electrical characteristics .....	5
4	Typical performance characteristics .....	6
5	Package mechanical data .....	8
6	Revision History .....	15

# 1 Pin configuration

Figure 1. Pin configuration (top view)

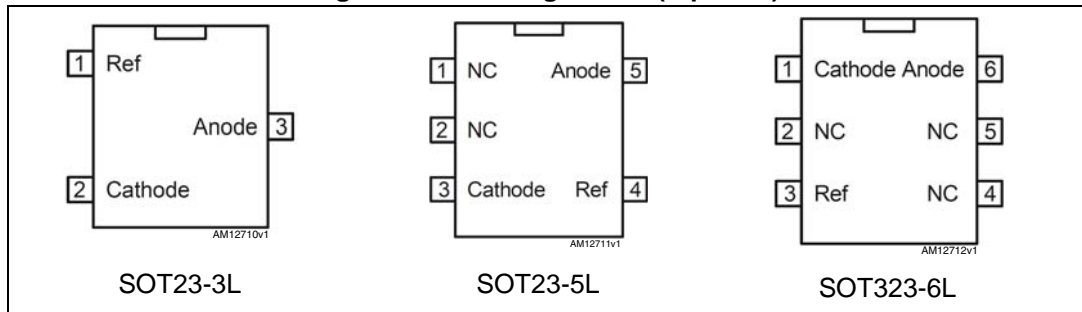

## 2 Maximum ratings

**Table 2. Absolute maximum ratings**

Symbol	Parameter	Value	Unit
V <sub>KA</sub>	Cathode to anode voltage	22	V
I <sub>K</sub>	Continuous cathode current range	- 100 to +100	mA
I <sub>REF</sub>	Reference input current range	- 0.05 to +3	mA
T <sub>STG</sub>	Storage temperature	- 65 to +150	°C
ESD	Human body model (HBM)	2	kV
	Machine model (MM)	200	V
	Charged device model	1500	V
T <sub>LEAD</sub>	Lead temperature (soldering) 10 sec	260	°C
T <sub>J</sub>	Max. junction temperature	+150	°C

*Note:* Absolute maximum ratings are those values beyond which damage to the device may occur. Functional operation under these conditions is not implied.

**Table 3. Thermal data**

Symbol	Parameter	SOT323-6L	SOT23-3L	SOT23-5L	Unit
R <sub>thJA</sub>	Thermal resistance junction-ambient	221	248	157	°C/W
R <sub>thJC</sub>	Thermal resistance junction-case	110	136	67	°C/W

**Table 4. Operating conditions**

Symbol	Parameter	Value	Unit
V <sub>KA</sub>	Cathode to anode voltage	V <sub>ref</sub> to 18	V
I <sub>kmin</sub>	Minimum operating current	100	µA
I <sub>kmax</sub>	Maximum operating current	60	mA
T <sub>oper</sub>	Operating free air temperature range	-40 to +125	°C

### 3 Electrical characteristics

$I_k = 10 \text{ mA}$ ,  $T_{\text{amb}} = 25 \text{ °C}$  (unless otherwise specified).

**Table 5. Electrical characteristics for TLVH431**

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$V_{\text{ref}}$	Reference voltage	$V_{\text{KA}} = V_{\text{ref}}$ TLVH431A 0.5% TLVH431B 0.25% TLVH431L 1.5%	1.234 1.237 1.222	1.24	1.246 1.243 1.258	V
$\Delta V_{\text{ref}}$	Reference voltage variation overtemperature range <sup>(1)</sup>	$-40 \text{ °C} < T_{\text{amb}} < +125 \text{ °C}$ TLVH431A 0.5% TLVH431B 0.25% TLVH431L 1.5%	-26.7 -23.5 -39		+26.7 +23.5 +39	mV
$\Delta V_{\text{KA}}/\Delta T$	Average temperature coefficient	$V_{\text{KA}} = V_{\text{ref}}$ , $-40 \text{ °C} < T_{\text{amb}} < +125 \text{ °C}$		±30	±100	ppm/°C
$I_{\text{kmin}}$	Minimum cathode current for regulation	$V_{\text{KA}} = V_{\text{ref}}$		60	100	µA
		$V_{\text{KA}} = V_{\text{KAmax}}$		160	200	
$\Delta I_{\text{kmin}}$	Minimum cathode current variation overtemperature range	$V_{\text{KA}} = V_{\text{ref}}$ , $-40 \text{ °C} < T_{\text{amb}} < +125 \text{ °C}$		70	100	µA
		$V_{\text{KA}} = V_{\text{KAmax}}$ , $-40 \text{ °C} < T_{\text{amb}} < +125 \text{ °C}$		100	200	
$I_{\text{ref}}$	Reference input current	$R_1 = 10 \text{ k}\Omega$ , $R_2 = \infty$		1.5	2.5	µA
$\Delta I_{\text{ref}}$	Reference current variation overtemperature range	$R_1 = 10 \text{ k}\Omega$ , $R_2 = \infty$ $-40 \text{ °C} < T_{\text{amb}} < +125 \text{ °C}$		2.5	3.5	µA
$\frac{\Delta V_{\text{ref}}}{\Delta V_{\text{ka}}}$	Ratio of change in reference input voltage to change in cathode to anode voltage	$\Delta V_{\text{KA}} = 18 \text{ V}$ to $V_{\text{ref}}$			-2	mV/V
		$\Delta V_{\text{KA}} = 18 \text{ V}$ to $V_{\text{ref}}$ $-40 \text{ °C} < T_{\text{amb}} < +125 \text{ °C}$			-2.5	
$I_{\text{off}}$	Off-state cathode current	$V_{\text{KA}} = V_{\text{KAmax}}$ , $V_{\text{ref}} = \text{GND}$		10	80	nA
$\Delta I_{\text{off}}$	Off-state cathode current overtemperature range	$V_{\text{KA}} = V_{\text{KAmax}}$ , $V_{\text{ref}} = \text{GND}$ $-40 \text{ °C} < T_{\text{amb}} < +125 \text{ °C}$		1000	2000	nA
$ R_{\text{KA}} $	Static impedance	$V_{\text{KA}} = V_{\text{ref}}$ , $\Delta I_{\text{K}} = 100 \text{ }\mu\text{A}$ to 60 mA		0.14	0.62	W
$ Z_{\text{KA}} $	Dynamic impedance <sup>(2)</sup>	$V_{\text{KA}} = V_{\text{ref}}$ , $\Delta I_{\text{K}} = 10 \text{ mA}$ to 60 mA, $f \leq 1 \text{ kHz}$		0.22	0.85	W
$e_n$	Wide band noise	$I_{\text{K}} = 10 \text{ mA}$ ; $10 \text{ Hz} < f < 100 \text{ kHz}$		30		mV <sub>RMS</sub>
$T_{\text{ON}}$	Turn-on setting time	$V_{\text{KA}} = V_{\text{ref}}$ , $\Delta I_{\text{K}} = 10 \text{ mA}$		40	70	µsec

1. The overtemperature tolerance values are calculated as:  $\pm V_{\text{k}25^\circ\text{C}} \times \{\text{tolerance}_{25^\circ\text{C}} + [(\text{ppm}_{\text{max}}/^\circ\text{C}) \times (\Delta T)]\}$ .  
Example: TLVH431A  $\Delta V_{\text{k}} = \pm 1.24 \times (0.5\% + 100 \text{ ppm}/^\circ\text{C} \times 165 \text{ }^\circ\text{C}) = \pm 1.24 \times (0.5\% + 1.65\%) = \pm 1.24 \times 2.15\% = \pm 26.7 \text{ mV}$ .

2. The dynamic impedance is defined as  $|Z_{\text{KA}}| = \Delta V_{\text{KA}}/\Delta I_{\text{k}}$ .

**Note:** Limits are 100% production tested at 25 °C. Limits over the temperature range are guaranteed through correlation and by design.

# 4 Typical performance characteristics

The following plots are referred to the typical application circuit and, unless otherwise noted, at  $T_A = 25\text{ }^\circ\text{C}$ .

Figure 2. Test circuit for  $V_{KA} = V_{ref}$

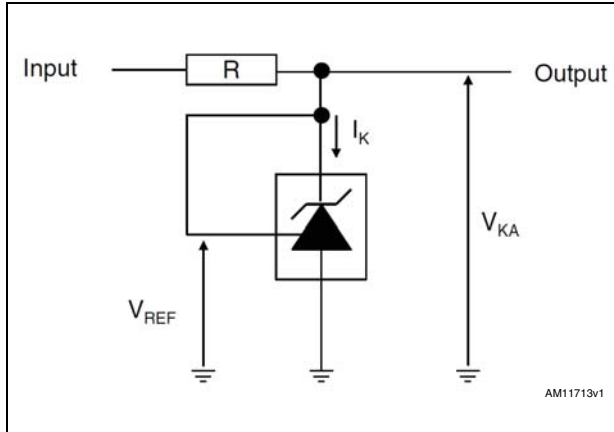


Figure 3. Test circuit for  $V_{KA} > V_{ref}$

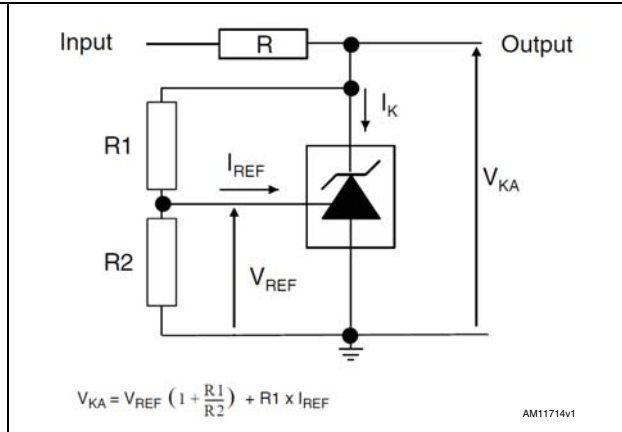


Figure 4. Reference voltage vs. temperature

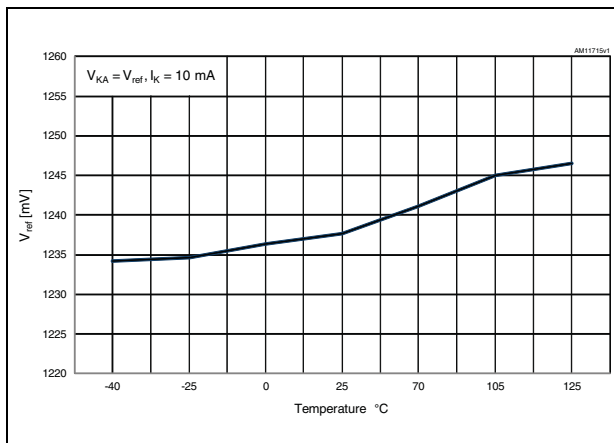


Figure 5. Minimum cathode current for regulation vs. temperature

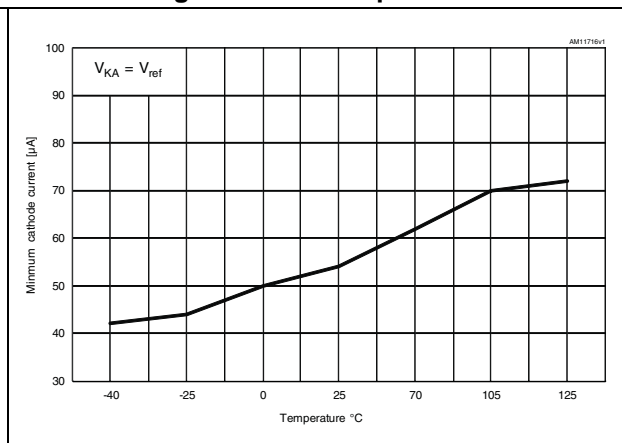


Figure 6. Off-state cathode current vs. temperature

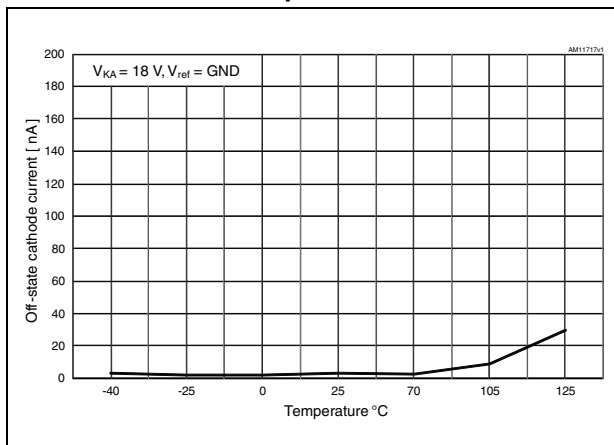


Figure 7. Reference input current vs. temperature

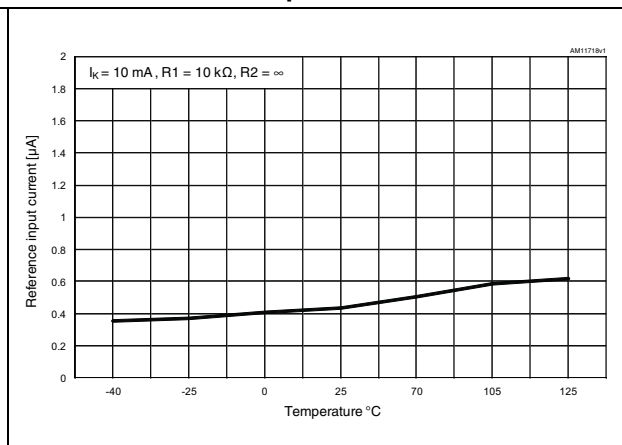


Figure 8. Cathode current vs. cathode voltage

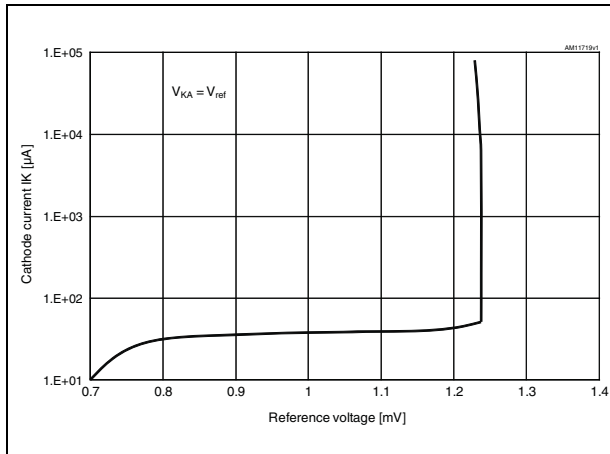


Figure 9.  $\Delta V_{ref}$  vs.  $\Delta V_{KA}$

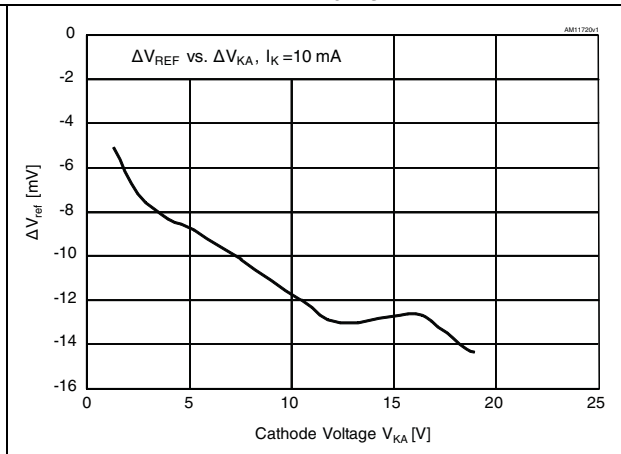


Figure 10. Wideband noise

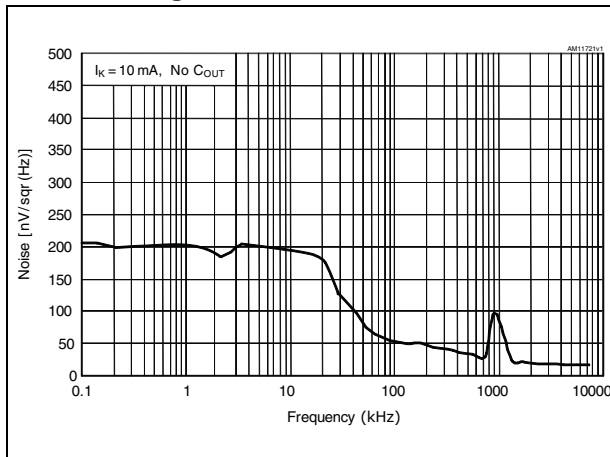


Figure 11. Gain and phase vs. frequency

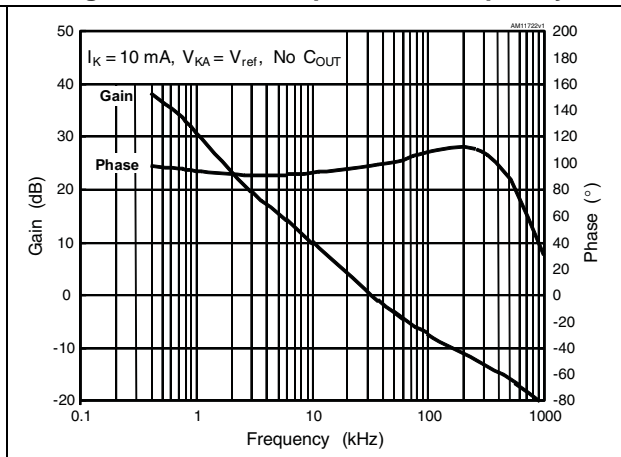


Figure 12. Turn-on (no  $C_{LOAD}$ )


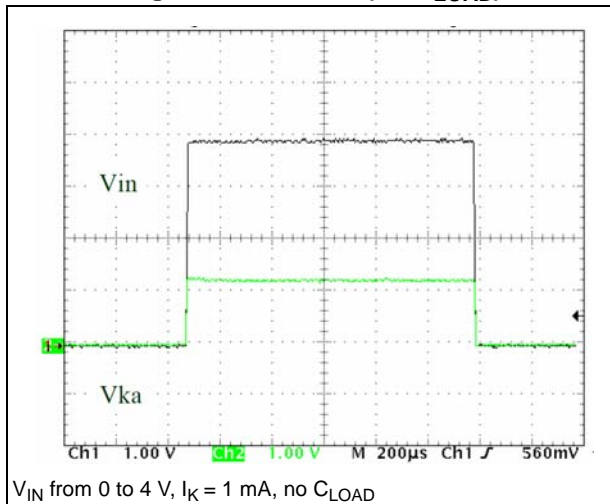



Figure 13. Turn-on ( $C_{LOAD} = 10$  nF)

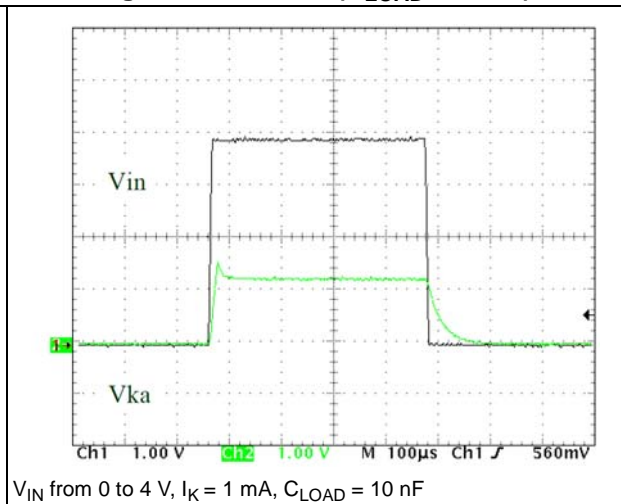

## 5 Package mechanical data

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK is an ST trademark.

Figure 14. SOT23-3L drawing dimensions

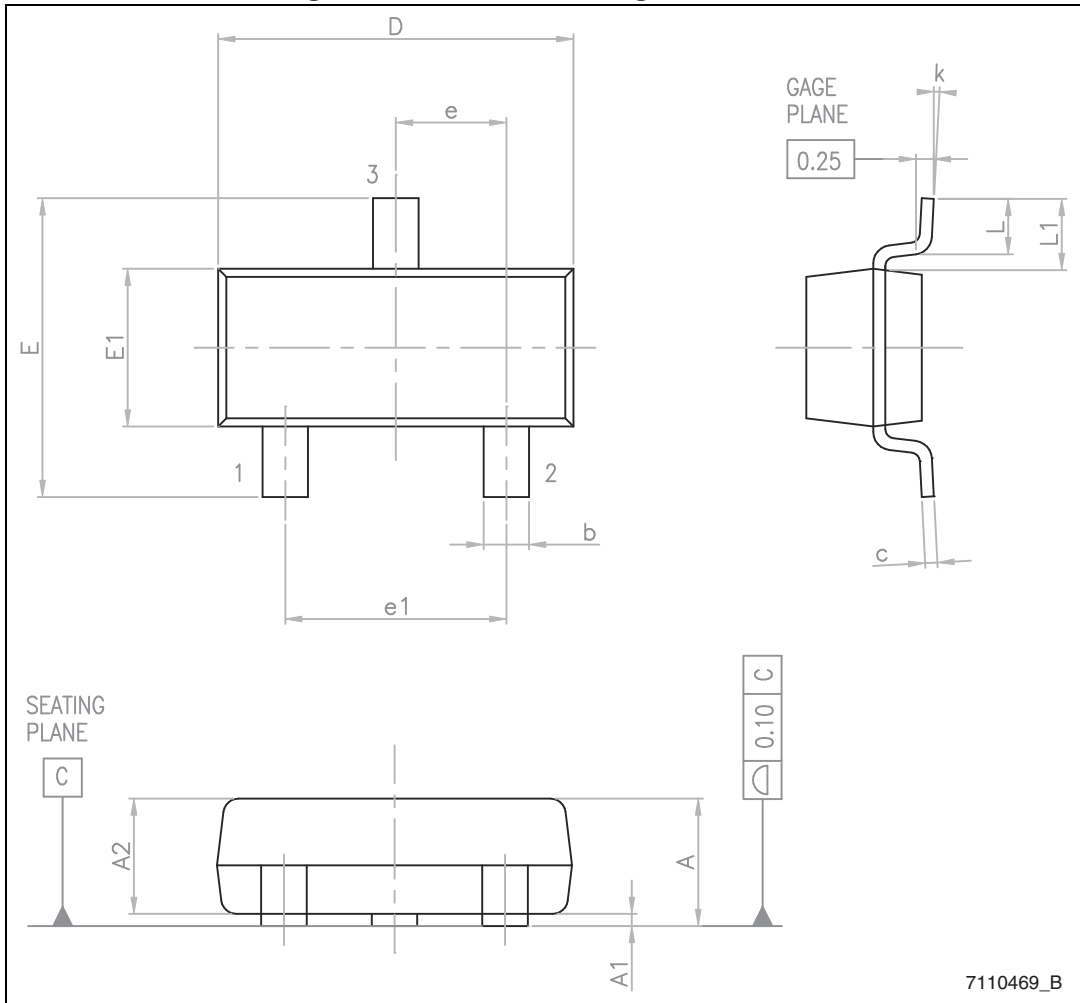

7110469\_B



Table 6. SOT23-3L mechanical data

Dim.	mm		
	Min.	Typ.	Max.
A	0.89		1.12
A1	0.01		0.10
A2	0.88	0.95	1.02
b	0.30		0.50
c	0.08		0.20
D	2.80	2.90	3.04
E	2.10		2.64
E1	1.20	1.30	1.40
e		0.95	
e1		1.90	
L	0.40	0.50	0.60
L1		0.54	
k	0°		8°

Figure 15. SOT23-5L drawing dimensions


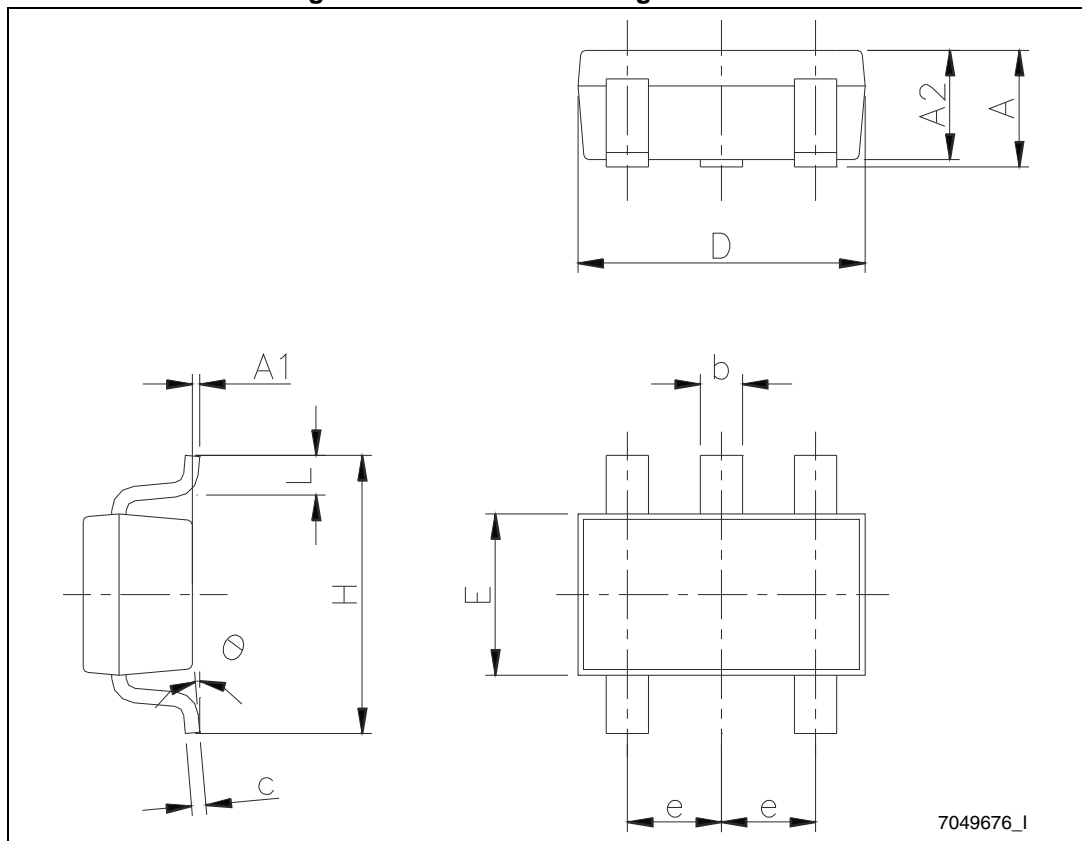


Table 7. SOT23-5L mechanical data

Dim.	mm		
	Min.	Typ.	Max.
A	0.90	1.20	1.45
A1			0.15
A2	0.90	1.05	1.30
B	0.35	0.40	0.50
C	0.09	0.15	0.20
D	2.80	2.90	3.00
D1		1.90	
e		0.95	
E	2.60	2.80	3.00
F	1.50	1.60	1.75
L	0.10	0.35	0.60
K	0°		10°

Figure 16. SOT323-6L drawing dimensions

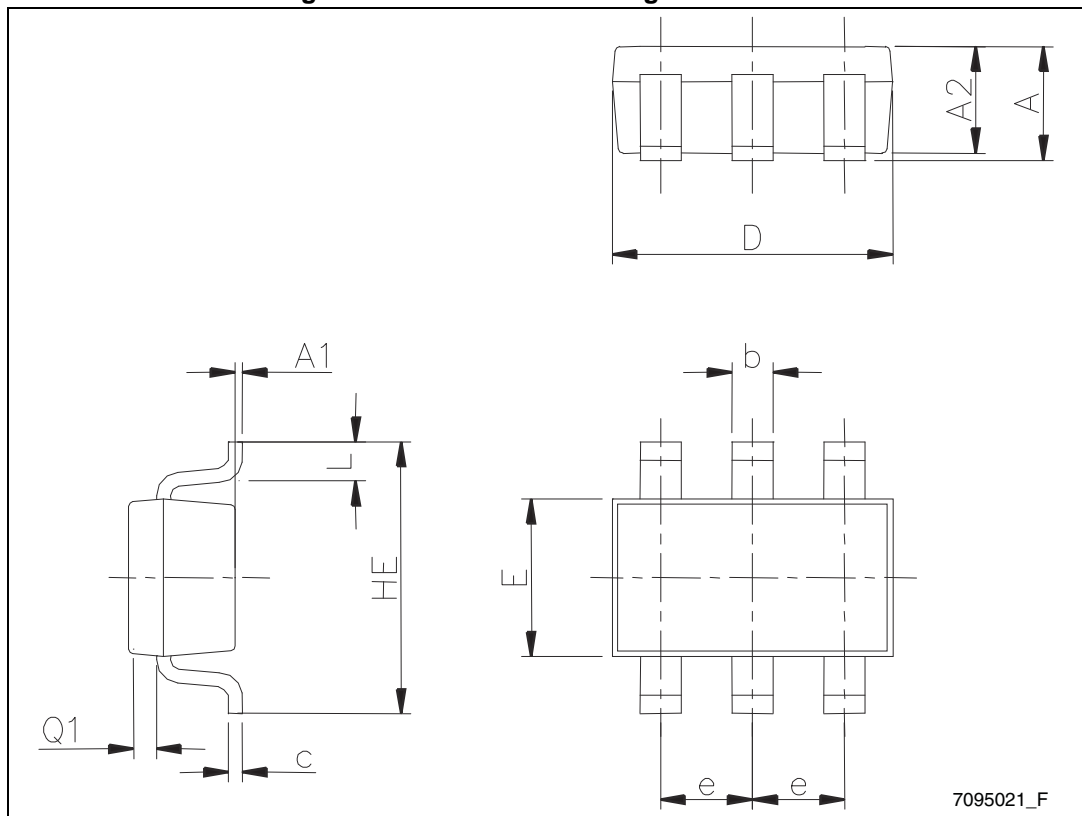

7095021\_F

Table 8. SOT323-6L mechanical data

Dim.	mm		
	Min.	Typ.	Max.
A	0.80		1.10
A1	0		0.10
A2	0.80		1.00
b	0.15		0.30
c	0.10		0.18
D	1.80		2.20
E	1.15		1.35
e		0.65	
HE	1.80		2.40
L	0.10		0.40
Q1	0.10		0.40

Figure 17. SOT23-5L footprint recommended data (dimensions are in mm)


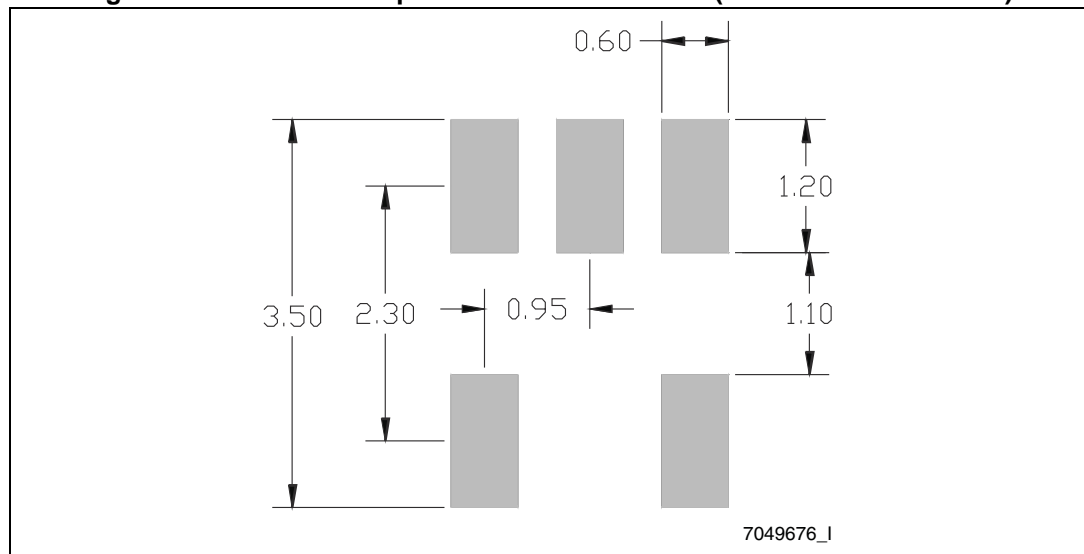


Figure 18. SOT323-6L footprint recommended data (dimensions are in mm)

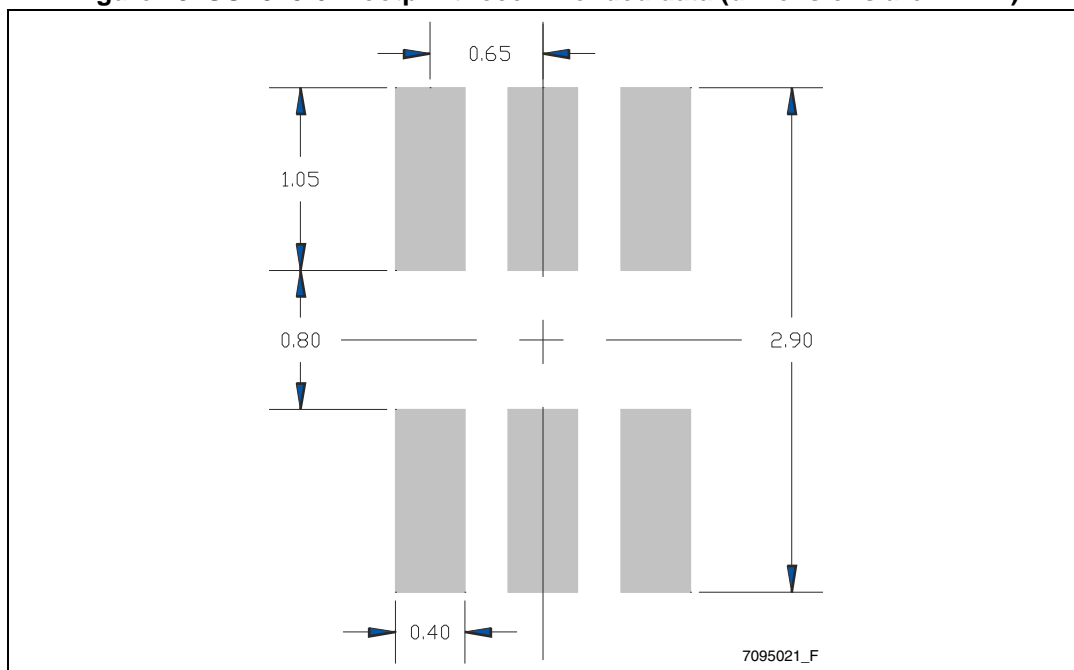

## 6 Revision History

**Table 9. Document revision history**

Date	Revision	Changes
13-Jun-2012	1	Initial release.
23-Jan-2014	2	Updated the Features in cover page, <a href="#">Table 1: Device summary</a> and <a href="#">Table 5: Electrical characteristics for TLVH431</a> . Minor text changes.
28-Jan-2014	3	Updated the min. value of $V_{ref}$ in <a href="#">Table 5: Electrical characteristics for TLVH431</a> .

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**ST PRODUCTS ARE NOT DESIGNED OR AUTHORIZED FOR USE IN: (A) SAFETY CRITICAL APPLICATIONS SUCH AS LIFE SUPPORTING, ACTIVE IMPLANTED DEVICES OR SYSTEMS WITH PRODUCT FUNCTIONAL SAFETY REQUIREMENTS; (B) AERONAUTIC APPLICATIONS; (C) AUTOMOTIVE APPLICATIONS OR ENVIRONMENTS, AND/OR (D) AEROSPACE APPLICATIONS OR ENVIRONMENTS. WHERE ST PRODUCTS ARE NOT DESIGNED FOR SUCH USE, THE PURCHASER SHALL USE PRODUCTS AT PURCHASER'S SOLE RISK, EVEN IF ST HAS BEEN INFORMED IN WRITING OF SUCH USAGE, UNLESS A PRODUCT IS EXPRESSLY DESIGNATED BY ST AS BEING INTENDED FOR "AUTOMOTIVE, AUTOMOTIVE SAFETY OR MEDICAL" INDUSTRY DOMAINS ACCORDING TO ST PRODUCT DESIGN SPECIFICATIONS. PRODUCTS FORMALLY ESCC, QML OR JAN QUALIFIED ARE DEEMED SUITABLE FOR USE IN AEROSPACE BY THE CORRESPONDING GOVERNMENTAL AGENCY.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2014 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)