
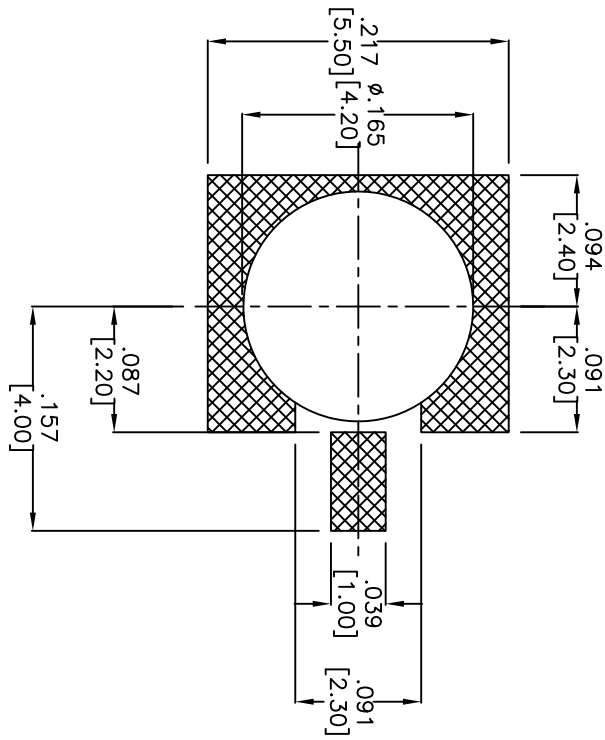
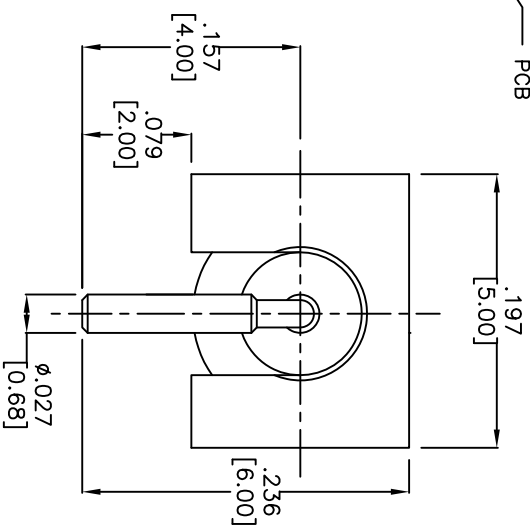


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/29/10	

APPROVED: _____
 DATE: _____ TITLE: _____

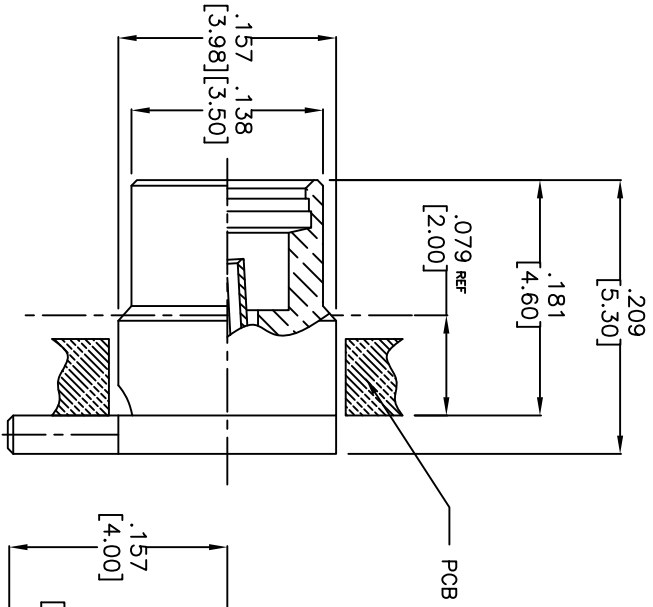

CONTACT PIN	COPPER	30u" GOLD PLATED
INSULATOR	TEFLON	WHITE
BODY	BRASS	GOLD FLASH PLATED
DESCRIPTION	MATERIAL	FINISH

SPECIFICATIONS:

Electrical:
 Nominal Impedance: 50 ohms
 Frequency range: 0-6 GHz
 Working Voltage: 170 VRMS max.
 Dielectric Withstanding Voltage: 500 VRMS min.
 Contact Resistance: 5 Milliohms max. (Center Contact)
 2.5 Milliohms max. (Outer Contact)
 Insulator Resistance: 1000 Megohms min.
 Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE MM
 TOLERANCES: EXCEPT AS NOTED
 INCHES
 .X ± .10 Ø.X ± .10
 .XX ± .020 .XXX ± .015
 .XXX ± .015 Ø.XXX ± .010

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

APPROVALS	DATE
DRAWN AY	7/29/10
CHECKED AH	7/29/10
APPROVED	

TITLE	MMCX JACK R/A PCB MOUNT JACK
SIZE	PART NO.
X	RF12-500-2
REF: S00092T	SCALE: NTS
SHEET 1 OF 1	REV.