




Bestückungsplan / contact layout

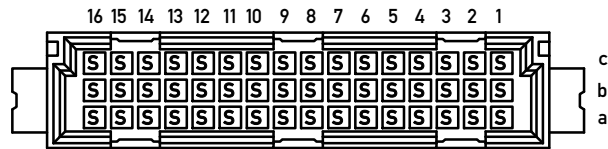

Leiterplatten- Lochbild / PCB drillhole pattern

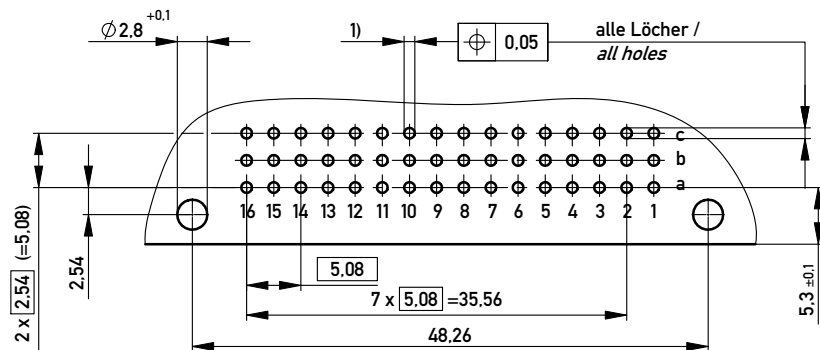



Stecklänge / mating length



E = early mate, late break / voreilend

S = standard

L = late mate, early break / nacheilend

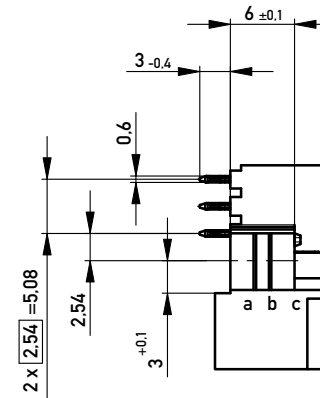

Elastische Einpresszone / compliant pressfit zone

Isolierwerkstoff / housing material : PBT GF 30

Bauart 4 / type 4

Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles

Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2

Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2

Schichtaufbau im metallisierten Loch siehe Zeichnung 114214

diameter of drilled hole see drawing 114214

1) $\phi 1.0^{+0.09}_{-0.06}$ Durchmesser des metallisierten Loches

$\phi 1.0^{+0.09}_{-0.06}$ Diameter of finished plated-through hole

Berduckung siehe Zeichnung 294905

marking see drawing 294905

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16816 to be observed.

| | | | | | |
|--|------------|----------------------|--|---|-----|
| Information: | | Tolerances | | Scale | 2:1 |
| All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using. | | All Dimensions in mm | | Designation | |
| Subject to modification without prior notice. Drawing will not be updated. | | | | Messerleiste C/2 48 EE Male Con. C/2 48 EE | |
| www.ERNI.com | | 354329 | | I A3 | |
| - | 16.09.2009 | Class | | STVC/2 | |
| Index | Date | | | | |